

lpopt
trunk

Generated by Doxygen 1.8.1.2

Mon Mar 16 2015 20:19:42

Contents

1	Class Index	1
1.1	Class Hierarchy	1
2	Class Index	9
2.1	Class List	9
3	Class Documentation	19
3.1	Ipopt::AdaptiveMuUpdate Class Reference	19
3.1.1	Detailed Description	21
3.1.2	Member Function Documentation	21
3.2	Ipopt::AlgorithmBuilder Class Reference	21
3.2.1	Detailed Description	22
3.2.2	Member Function Documentation	22
3.3	Ipopt::AlgorithmStrategyObject Class Reference	22
3.3.1	Detailed Description	24
3.3.2	Member Function Documentation	24
3.4	Ipopt::AmplOptionsList::AmplOption Class Reference	25
3.4.1	Detailed Description	26
3.5	Ipopt::AmplOptionsList Class Reference	26
3.5.1	Detailed Description	27
3.5.2	Member Function Documentation	27
3.6	Ipopt::AmplSuffixHandler Class Reference	28
3.6.1	Detailed Description	28
3.7	Ipopt::AmplTNLP Class Reference	28
3.7.1	Detailed Description	31
3.7.2	Constructor & Destructor Documentation	31
3.7.3	Member Function Documentation	31
3.8	Ipopt::AugRestoSystemSolver Class Reference	33
3.8.1	Detailed Description	34
3.8.2	Constructor & Destructor Documentation	34
3.8.3	Member Function Documentation	34
3.9	Ipopt::AugSystemSolver Class Reference	35
3.9.1	Detailed Description	36
3.9.2	Constructor & Destructor Documentation	36
3.9.3	Member Function Documentation	36
3.10	Ipopt::BacktrackingLineSearch Class Reference	37

3.10.1 Detailed Description	39
3.10.2 Constructor & Destructor Documentation	39
3.10.3 Member Function Documentation	39
3.11 Ipopt::BacktrackingLSAcceptor Class Reference	40
3.11.1 Detailed Description	41
3.11.2 Constructor & Destructor Documentation	41
3.11.3 Member Function Documentation	42
3.12 Ipopt::CachedResults< T > Class Template Reference	44
3.12.1 Detailed Description	46
3.12.2 Constructor & Destructor Documentation	46
3.12.3 Member Function Documentation	46
3.13 Ipopt::CGPenaltyCq Class Reference	46
3.13.1 Detailed Description	48
3.13.2 Member Function Documentation	48
3.14 Ipopt::CGPenaltyData Class Reference	48
3.14.1 Detailed Description	50
3.14.2 Member Function Documentation	50
3.15 Ipopt::CGPenaltyLSAcceptor Class Reference	50
3.15.1 Detailed Description	52
3.15.2 Constructor & Destructor Documentation	52
3.15.3 Member Function Documentation	52
3.16 Ipopt::CGPerturbationHandler Class Reference	54
3.16.1 Detailed Description	56
3.16.2 Member Function Documentation	56
3.17 Ipopt::CGSearchDirCalculator Class Reference	56
3.17.1 Detailed Description	58
3.17.2 Member Function Documentation	58
3.18 Ipopt::CompoundMatrix Class Reference	58
3.18.1 Detailed Description	60
3.18.2 Constructor & Destructor Documentation	60
3.18.3 Member Function Documentation	60
3.19 Ipopt::CompoundMatrixSpace Class Reference	62
3.19.1 Detailed Description	63
3.19.2 Member Function Documentation	63
3.20 Ipopt::CompoundSymMatrix Class Reference	64
3.20.1 Detailed Description	65
3.20.2 Constructor & Destructor Documentation	65

3.20.3	Member Function Documentation	65
3.21	Ipopt::CompoundSymMatrixSpace Class Reference	66
3.21.1	Detailed Description	68
3.21.2	Member Function Documentation	68
3.22	Ipopt::CompoundVector Class Reference	68
3.22.1	Detailed Description	71
3.22.2	Constructor & Destructor Documentation	71
3.22.3	Member Function Documentation	71
3.23	Ipopt::CompoundVectorSpace Class Reference	73
3.23.1	Detailed Description	74
3.23.2	Constructor & Destructor Documentation	74
3.23.3	Member Function Documentation	74
3.24	Ipopt::ConvergenceCheck Class Reference	74
3.24.1	Detailed Description	76
3.24.2	Member Function Documentation	76
3.25	Ipopt::DefaultIterateInitializer Class Reference	76
3.25.1	Detailed Description	78
3.25.2	Constructor & Destructor Documentation	78
3.25.3	Member Function Documentation	78
3.26	Ipopt::DenseGenMatrix Class Reference	79
3.26.1	Detailed Description	81
3.26.2	Member Function Documentation	81
3.27	Ipopt::DenseGenMatrixSpace Class Reference	83
3.27.1	Detailed Description	84
3.27.2	Constructor & Destructor Documentation	84
3.27.3	Member Function Documentation	85
3.28	Ipopt::DenseSymMatrix Class Reference	85
3.28.1	Detailed Description	86
3.28.2	Member Function Documentation	87
3.29	Ipopt::DenseSymMatrixSpace Class Reference	88
3.29.1	Detailed Description	89
3.29.2	Constructor & Destructor Documentation	89
3.29.3	Member Function Documentation	89
3.30	Ipopt::DenseVector Class Reference	89
3.30.1	Detailed Description	92
3.30.2	Member Function Documentation	92
3.31	Ipopt::DenseVectorSpace Class Reference	94

3.31.1 Detailed Description	95
3.31.2 Member Function Documentation	96
3.32 Ipopt::DependentResult< T > Class Template Reference	96
3.32.1 Detailed Description	97
3.32.2 Constructor & Destructor Documentation	97
3.32.3 Member Function Documentation	97
3.33 Ipopt::DiagMatrix Class Reference	98
3.33.1 Detailed Description	100
3.33.2 Constructor & Destructor Documentation	100
3.33.3 Member Function Documentation	100
3.34 Ipopt::DiagMatrixSpace Class Reference	101
3.34.1 Detailed Description	102
3.34.2 Constructor & Destructor Documentation	102
3.34.3 Member Function Documentation	102
3.35 Ipopt::EqMultiplierCalculator Class Reference	102
3.35.1 Detailed Description	103
3.35.2 Constructor & Destructor Documentation	104
3.35.3 Member Function Documentation	104
3.36 Ipopt::EquilibrationScaling Class Reference	104
3.36.1 Detailed Description	105
3.36.2 Member Function Documentation	105
3.37 Ipopt::ExactHessianUpdater Class Reference	106
3.37.1 Detailed Description	107
3.38 Ipopt::ExpandedMultiVectorMatrix Class Reference	107
3.38.1 Detailed Description	108
3.38.2 Member Function Documentation	108
3.39 Ipopt::ExpandedMultiVectorMatrixSpace Class Reference	109
3.39.1 Detailed Description	110
3.39.2 Member Function Documentation	110
3.40 Ipopt::ExpansionMatrix Class Reference	111
3.40.1 Detailed Description	112
3.40.2 Member Function Documentation	112
3.41 Ipopt::ExpansionMatrixSpace Class Reference	114
3.41.1 Detailed Description	115
3.41.2 Constructor & Destructor Documentation	115
3.41.3 Member Function Documentation	115
3.42 Ipopt::FileJournal Class Reference	115

3.42.1 Detailed Description	116
3.42.2 Constructor & Destructor Documentation	117
3.42.3 Member Function Documentation	117
3.43 Ipopt::Filter Class Reference	117
3.43.1 Detailed Description	118
3.43.2 Member Function Documentation	118
3.44 Ipopt::FilterEntry Class Reference	118
3.44.1 Detailed Description	119
3.44.2 Member Function Documentation	119
3.45 Ipopt::FilterLSAcceptor Class Reference	119
3.45.1 Detailed Description	121
3.45.2 Constructor & Destructor Documentation	121
3.45.3 Member Function Documentation	121
3.46 Ipopt::GenAugSystemSolver Class Reference	123
3.46.1 Detailed Description	124
3.46.2 Member Function Documentation	124
3.47 Ipopt::GenKKTsolverInterface Class Reference	125
3.47.1 Detailed Description	126
3.47.2 Member Function Documentation	126
3.48 Ipopt::GenTMatrix Class Reference	127
3.48.1 Detailed Description	129
3.48.2 Member Function Documentation	129
3.49 Ipopt::GenTMatrixSpace Class Reference	130
3.49.1 Detailed Description	131
3.49.2 Constructor & Destructor Documentation	132
3.49.3 Member Function Documentation	132
3.50 Ipopt::GradientScaling Class Reference	132
3.50.1 Detailed Description	133
3.50.2 Member Function Documentation	133
3.51 Ipopt::HessianUpdater Class Reference	134
3.51.1 Detailed Description	135
3.52 Ipopt::IdentityMatrix Class Reference	135
3.52.1 Detailed Description	136
3.52.2 Member Function Documentation	136
3.53 Ipopt::IdentityMatrixSpace Class Reference	137
3.53.1 Detailed Description	138
3.53.2 Constructor & Destructor Documentation	138

3.53.3	Member Function Documentation	139
3.54	Ipopt::InexactAlgorithmBuilder Class Reference	139
3.54.1	Detailed Description	140
3.54.2	Member Function Documentation	140
3.55	Ipopt::InexactCq Class Reference	140
3.55.1	Detailed Description	141
3.55.2	Member Function Documentation	142
3.56	Ipopt::InexactData Class Reference	142
3.56.1	Detailed Description	144
3.56.2	Member Function Documentation	144
3.57	Ipopt::InexactDoglegNormalStep Class Reference	145
3.57.1	Detailed Description	146
3.57.2	Member Function Documentation	146
3.58	Ipopt::InexactLSAcceptor Class Reference	146
3.58.1	Detailed Description	148
3.58.2	Constructor & Destructor Documentation	148
3.58.3	Member Function Documentation	149
3.59	Ipopt::InexactNewtonNormalStep Class Reference	150
3.59.1	Detailed Description	151
3.59.2	Member Function Documentation	151
3.60	Ipopt::InexactNormalStepCalculator Class Reference	151
3.60.1	Detailed Description	153
3.60.2	Member Function Documentation	153
3.61	Ipopt::InexactNormalTerminationTester Class Reference	153
3.61.1	Detailed Description	155
3.61.2	Member Function Documentation	155
3.62	Ipopt::InexactPDSolver Class Reference	156
3.62.1	Detailed Description	156
3.62.2	Member Function Documentation	157
3.63	Ipopt::InexactPDTerminationTester Class Reference	157
3.63.1	Detailed Description	158
3.63.2	Member Function Documentation	158
3.64	Ipopt::InexactSearchDirCalculator Class Reference	159
3.64.1	Detailed Description	160
3.64.2	Member Function Documentation	160
3.65	Ipopt::InexactTSymScalingMethod Class Reference	160
3.65.1	Detailed Description	161

3.65.2	Member Function Documentation	162
3.66	Ipopt::IpoptAdditionalCq Class Reference	162
3.66.1	Detailed Description	163
3.66.2	Member Function Documentation	163
3.67	Ipopt::IpoptAdditionalData Class Reference	163
3.67.1	Detailed Description	164
3.67.2	Member Function Documentation	164
3.68	Ipopt::IpoptAlgorithm Class Reference	164
3.68.1	Detailed Description	166
3.68.2	Constructor & Destructor Documentation	166
3.68.3	Member Function Documentation	166
3.69	Ipopt::IpoptApplication Class Reference	166
3.69.1	Detailed Description	168
3.69.2	Member Function Documentation	168
3.70	Ipopt::IpoptCalculatedQuantities Class Reference	170
3.70.1	Detailed Description	175
3.70.2	Member Function Documentation	175
3.71	Ipopt::IpoptData Class Reference	177
3.71.1	Detailed Description	181
3.71.2	Member Function Documentation	181
3.72	Ipopt::IpoptException Class Reference	183
3.72.1	Detailed Description	183
3.73	Ipopt::IpoptNLP Class Reference	184
3.73.1	Detailed Description	186
3.73.2	Member Function Documentation	187
3.74	Ipopt::IterateInitializer Class Reference	188
3.74.1	Detailed Description	188
3.74.2	Member Function Documentation	188
3.75	Ipopt::IteratesVector Class Reference	189
3.75.1	Detailed Description	192
3.75.2	Member Function Documentation	192
3.76	Ipopt::IteratesVectorSpace Class Reference	197
3.76.1	Detailed Description	198
3.76.2	Constructor & Destructor Documentation	198
3.76.3	Member Function Documentation	198
3.77	Ipopt::IterationOutput Class Reference	199
3.77.1	Detailed Description	200

3.77.2	Member Function Documentation	200
3.78	Ipopt::IterativePardisoSolverInterface Class Reference	200
3.78.1	Detailed Description	202
3.78.2	Member Function Documentation	202
3.79	Ipopt::IterativeSolverTerminationTester Class Reference	203
3.79.1	Detailed Description	204
3.79.2	Member Enumeration Documentation	204
3.79.3	Member Function Documentation	205
3.80	Ipopt::IterativeWsmpSolverInterface Class Reference	205
3.80.1	Detailed Description	207
3.80.2	Member Function Documentation	207
3.81	Ipopt::Journal Class Reference	208
3.81.1	Detailed Description	209
3.81.2	Constructor & Destructor Documentation	209
3.81.3	Member Function Documentation	209
3.82	Ipopt::Journalist Class Reference	210
3.82.1	Detailed Description	211
3.82.2	Constructor & Destructor Documentation	211
3.82.3	Member Function Documentation	211
3.83	Ipopt::LeastSquareMultipliers Class Reference	213
3.83.1	Detailed Description	214
3.83.2	Constructor & Destructor Documentation	214
3.83.3	Member Function Documentation	214
3.84	Ipopt::LimMemQuasiNewtonUpdater Class Reference	214
3.84.1	Detailed Description	216
3.85	Ipopt::LineSearch Class Reference	216
3.85.1	Detailed Description	217
3.85.2	Member Function Documentation	217
3.86	Ipopt::LoqpMuOracle Class Reference	218
3.86.1	Detailed Description	219
3.87	Ipopt::LowRankAugSystemSolver Class Reference	219
3.87.1	Detailed Description	220
3.87.2	Member Function Documentation	220
3.88	Ipopt::LowRankSSAugSystemSolver Class Reference	221
3.88.1	Detailed Description	222
3.88.2	Constructor & Destructor Documentation	222
3.88.3	Member Function Documentation	222

3.89 Ipopt::LowRankUpdateSymMatrix Class Reference	223
3.89.1 Detailed Description	224
3.89.2 Constructor & Destructor Documentation	224
3.89.3 Member Function Documentation	225
3.90 Ipopt::LowRankUpdateSymMatrixSpace Class Reference	226
3.90.1 Detailed Description	227
3.90.2 Constructor & Destructor Documentation	227
3.90.3 Member Function Documentation	228
3.91 Ipopt::Ma27TSolverInterface Class Reference	228
3.91.1 Detailed Description	229
3.91.2 Member Function Documentation	229
3.92 Ipopt::Ma28TDependencyDetector Class Reference	230
3.92.1 Detailed Description	231
3.92.2 Member Function Documentation	232
3.93 Ipopt::Ma57TSolverInterface Class Reference	232
3.93.1 Detailed Description	234
3.93.2 Member Function Documentation	234
3.94 ma77_control_d Struct Reference	235
3.94.1 Detailed Description	235
3.95 ma77_info_d Struct Reference	235
3.95.1 Detailed Description	235
3.96 Ipopt::Ma77SolverInterface Class Reference	235
3.96.1 Detailed Description	237
3.96.2 Member Function Documentation	238
3.97 ma86_control_d Struct Reference	239
3.97.1 Detailed Description	239
3.98 ma86_info_d Struct Reference	240
3.98.1 Detailed Description	240
3.99 Ipopt::Ma86SolverInterface Class Reference	240
3.99.1 Detailed Description	241
3.99.2 Member Function Documentation	242
3.100ma97_control_d Struct Reference	244
3.100.1 Detailed Description	244
3.101ma97_info Struct Reference	244
3.101.1 Detailed Description	244
3.102Ipopt::Ma97SolverInterface Class Reference	244
3.102.1 Detailed Description	246

3.102.2 Member Function Documentation	247
3.103Ipopt::Matrix Class Reference	248
3.103.1 Detailed Description	250
3.103.2 Constructor & Destructor Documentation	251
3.103.3 Member Function Documentation	251
3.104Ipopt::MatrixSpace Class Reference	253
3.104.1 Detailed Description	254
3.104.2 Member Function Documentation	255
3.105Ipopt::Mc19TSymScalingMethod Class Reference	255
3.105.1 Detailed Description	256
3.105.2 Member Function Documentation	256
3.106mc68_control Struct Reference	256
3.106.1 Detailed Description	256
3.107mc68_info Struct Reference	256
3.107.1 Detailed Description	256
3.108Ipopt::MinC_1NrmRestorationPhase Class Reference	257
3.108.1 Detailed Description	258
3.108.2 Constructor & Destructor Documentation	258
3.108.3 Member Function Documentation	258
3.109Ipopt::MonotoneMuUpdate Class Reference	258
3.109.1 Detailed Description	259
3.109.2 Member Function Documentation	260
3.110Ipopt::MultiVectorMatrix Class Reference	260
3.110.1 Detailed Description	262
3.110.2 Member Function Documentation	262
3.111Ipopt::MultiVectorMatrixSpace Class Reference	263
3.111.1 Detailed Description	264
3.111.2 Member Function Documentation	264
3.112Ipopt::MumpsSolverInterface Class Reference	265
3.112.1 Detailed Description	266
3.112.2 Member Function Documentation	266
3.113Ipopt::MuOracle Class Reference	267
3.113.1 Detailed Description	268
3.113.2 Member Function Documentation	268
3.114Ipopt::MuUpdate Class Reference	269
3.114.1 Detailed Description	270
3.114.2 Member Function Documentation	270

3.115Ipopt::NLP Class Reference	270
3.115.1 Detailed Description	272
3.115.2 Member Function Documentation	272
3.116Ipopt::NLPBoundsRemover Class Reference	274
3.116.1 Detailed Description	276
3.116.2 Constructor & Destructor Documentation	276
3.116.3 Member Function Documentation	277
3.117Ipopt::NLPScalingObject Class Reference	278
3.117.1 Detailed Description	281
3.117.2 Member Function Documentation	281
3.118Ipopt::NoNLPScalingObject Class Reference	282
3.118.1 Detailed Description	283
3.119Ipopt::Observer Class Reference	283
3.119.1 Detailed Description	284
3.119.2 Member Function Documentation	284
3.120Ipopt::OptimalityErrorConvergenceCheck Class Reference	285
3.120.1 Detailed Description	286
3.120.2 Member Data Documentation	287
3.121Ipopt::OptionsList Class Reference	287
3.121.1 Detailed Description	288
3.121.2 Member Function Documentation	289
3.122Ipopt::OrigIpoptNLP Class Reference	289
3.122.1 Detailed Description	292
3.122.2 Member Function Documentation	292
3.123Ipopt::OrigIterationOutput Class Reference	292
3.123.1 Detailed Description	293
3.123.2 Member Function Documentation	294
3.124Ipopt::PardisoSolverInterface Class Reference	294
3.124.1 Detailed Description	295
3.124.2 Member Function Documentation	295
3.125Ipopt::PDFullSpaceSolver Class Reference	296
3.125.1 Detailed Description	298
3.126Ipopt::PDPerturbationHandler Class Reference	298
3.126.1 Detailed Description	301
3.126.2 Member Function Documentation	301
3.126.3 Member Data Documentation	302
3.127Ipopt::PDSearchDirCalculator Class Reference	303

3.127.1 Detailed Description	305
3.127.2 Member Function Documentation	305
3.128Ipopt::PDSystemSolver Class Reference	305
3.128.1 Detailed Description	306
3.128.2 Member Function Documentation	307
3.129Ipopt::PenaltyLSAcceptor Class Reference	307
3.129.1 Detailed Description	308
3.129.2 Constructor & Destructor Documentation	309
3.129.3 Member Function Documentation	309
3.130Ipopt::PiecewisePenalty Class Reference	310
3.130.1 Detailed Description	311
3.130.2 Member Function Documentation	311
3.131Ipopt::PiecewisePenEntry Struct Reference	311
3.131.1 Detailed Description	311
3.132Ipopt::PointPerturber Class Reference	311
3.132.1 Detailed Description	312
3.133Ipopt::AmplOptionsList::PrivatInfo Class Reference	312
3.133.1 Detailed Description	312
3.134Ipopt::ProbingMuOracle Class Reference	313
3.134.1 Detailed Description	314
3.135Ipopt::QualityFunctionMuOracle Class Reference	314
3.135.1 Detailed Description	315
3.136Ipopt::ReferencedObject Class Reference	315
3.136.1 Detailed Description	316
3.137Ipopt::Referencer Class Reference	318
3.137.1 Detailed Description	319
3.138Ipopt::RegisteredOption Class Reference	319
3.138.1 Detailed Description	322
3.138.2 Member Function Documentation	322
3.139Ipopt::RegisteredOptions Class Reference	322
3.139.1 Detailed Description	324
3.139.2 Constructor & Destructor Documentation	324
3.139.3 Member Function Documentation	324
3.140Ipopt::RestoConvergenceCheck Class Reference	325
3.140.1 Detailed Description	326
3.141Ipopt::RestoFilterConvergenceCheck Class Reference	326
3.141.1 Detailed Description	328

3.141.2 Member Function Documentation	328
3.142Ipopt::RestoIpoptNLP Class Reference	328
3.142.1 Detailed Description	331
3.142.2 Member Function Documentation	331
3.143Ipopt::RestoIterateInitializer Class Reference	332
3.143.1 Detailed Description	333
3.143.2 Constructor & Destructor Documentation	334
3.143.3 Member Function Documentation	334
3.144Ipopt::RestoIterationOutput Class Reference	334
3.144.1 Detailed Description	335
3.144.2 Constructor & Destructor Documentation	336
3.144.3 Member Function Documentation	336
3.145Ipopt::RestoPenaltyConvergenceCheck Class Reference	336
3.145.1 Detailed Description	338
3.145.2 Member Function Documentation	338
3.146Ipopt::RestoRestorationPhase Class Reference	338
3.146.1 Detailed Description	339
3.146.2 Member Function Documentation	340
3.147Ipopt::RestoRestorationPhase Class Reference	340
3.147.1 Detailed Description	341
3.147.2 Constructor & Destructor Documentation	341
3.147.3 Member Function Documentation	341
3.148Ipopt::ScaledMatrix Class Reference	341
3.148.1 Detailed Description	343
3.148.2 Member Function Documentation	343
3.149Ipopt::ScaledMatrixSpace Class Reference	344
3.149.1 Detailed Description	345
3.149.2 Member Function Documentation	346
3.150Ipopt::SearchDirectionCalculator Class Reference	346
3.150.1 Detailed Description	346
3.150.2 Member Function Documentation	347
3.151Ipopt::SlackBasedTSymScalingMethod Class Reference	347
3.151.1 Detailed Description	348
3.151.2 Member Function Documentation	348
3.152Ipopt::SmartPtr< T > Class Template Reference	348
3.152.1 Detailed Description	350
3.152.2 Constructor & Destructor Documentation	351

3.152.3 Member Function Documentation	351
3.152.4 Friends And Related Function Documentation	352
3.153Ipopt::SolveStatistics Class Reference	353
3.153.1 Detailed Description	354
3.153.2 Constructor & Destructor Documentation	354
3.153.3 Member Function Documentation	354
3.154Ipopt::SparseSymLinearSolverInterface Class Reference	355
3.154.1 Detailed Description	356
3.154.2 Member Enumeration Documentation	357
3.154.3 Member Function Documentation	357
3.155Ipopt::StandardScalingBase Class Reference	359
3.155.1 Detailed Description	361
3.155.2 Member Function Documentation	361
3.156Ipopt::StdAugSystemSolver Class Reference	362
3.156.1 Detailed Description	364
3.156.2 Member Function Documentation	364
3.157Ipopt::StdInterfaceTNLP Class Reference	364
3.157.1 Detailed Description	366
3.157.2 Constructor & Destructor Documentation	366
3.157.3 Member Function Documentation	366
3.158Ipopt::StreamJournal Class Reference	368
3.158.1 Detailed Description	369
3.158.2 Constructor & Destructor Documentation	369
3.158.3 Member Function Documentation	369
3.159Ipopt::RegisteredOption::string_entry Class Reference	370
3.159.1 Detailed Description	370
3.160Ipopt::Subject Class Reference	370
3.160.1 Detailed Description	371
3.160.2 Member Function Documentation	371
3.161Ipopt::SumMatrix Class Reference	371
3.161.1 Detailed Description	373
3.161.2 Member Function Documentation	373
3.162Ipopt::SumMatrixSpace Class Reference	374
3.162.1 Detailed Description	375
3.162.2 Member Function Documentation	375
3.163Ipopt::SumSymMatrix Class Reference	375
3.163.1 Detailed Description	377

3.163.2 Member Function Documentation	377
3.164Ipopt::SumSymMatrixSpace Class Reference	378
3.164.1 Detailed Description	379
3.164.2 Constructor & Destructor Documentation	379
3.164.3 Member Function Documentation	379
3.165Ipopt::SymLinearSolver Class Reference	379
3.165.1 Detailed Description	381
3.165.2 Member Function Documentation	381
3.166Ipopt::SymMatrix Class Reference	382
3.166.1 Detailed Description	383
3.166.2 Member Function Documentation	383
3.167Ipopt::SymMatrixSpace Class Reference	383
3.167.1 Detailed Description	384
3.167.2 Member Function Documentation	384
3.168Ipopt::SymScaledMatrix Class Reference	385
3.168.1 Detailed Description	386
3.168.2 Member Function Documentation	386
3.169Ipopt::SymScaledMatrixSpace Class Reference	387
3.169.1 Detailed Description	388
3.169.2 Member Function Documentation	388
3.170Ipopt::SymTMatrix Class Reference	388
3.170.1 Detailed Description	390
3.170.2 Member Function Documentation	390
3.171Ipopt::SymTMatrixSpace Class Reference	392
3.171.1 Detailed Description	393
3.171.2 Constructor & Destructor Documentation	393
3.171.3 Member Function Documentation	393
3.172Ipopt::TaggedObject Class Reference	393
3.172.1 Detailed Description	395
3.172.2 Constructor & Destructor Documentation	395
3.173Ipopt::TDependencyDetector Class Reference	395
3.173.1 Detailed Description	396
3.173.2 Member Function Documentation	396
3.174Ipopt::TimedTask Class Reference	397
3.174.1 Detailed Description	397
3.174.2 Constructor & Destructor Documentation	398
3.174.3 Member Function Documentation	398

3.175Ipopt::TimingStatistics Class Reference	399
3.175.1 Detailed Description	400
3.175.2 Constructor & Destructor Documentation	400
3.175.3 Member Function Documentation	400
3.176Ipopt::TNLP Class Reference	400
3.176.1 Detailed Description	403
3.176.2 Member Enumeration Documentation	403
3.176.3 Member Function Documentation	403
3.177Ipopt::TNLPAdapter Class Reference	405
3.177.1 Detailed Description	408
3.177.2 Member Enumeration Documentation	408
3.177.3 Member Function Documentation	408
3.178Ipopt::TNLPReducer Class Reference	409
3.178.1 Detailed Description	411
3.178.2 Constructor & Destructor Documentation	411
3.178.3 Member Function Documentation	411
3.179Ipopt::TransposeMatrix Class Reference	413
3.179.1 Detailed Description	415
3.179.2 Member Function Documentation	415
3.180Ipopt::TransposeMatrixSpace Class Reference	416
3.180.1 Detailed Description	417
3.180.2 Constructor & Destructor Documentation	417
3.180.3 Member Function Documentation	417
3.181Ipopt::TripletHelper Class Reference	417
3.181.1 Detailed Description	417
3.182Ipopt::TripletToCSRConverter Class Reference	418
3.182.1 Detailed Description	419
3.182.2 Member Enumeration Documentation	419
3.182.3 Member Function Documentation	419
3.183Ipopt::TSymDependencyDetector Class Reference	420
3.183.1 Detailed Description	421
3.183.2 Member Function Documentation	421
3.184Ipopt::TSymLinearSolver Class Reference	421
3.184.1 Detailed Description	423
3.184.2 Constructor & Destructor Documentation	423
3.184.3 Member Function Documentation	423
3.185Ipopt::TSymScalingMethod Class Reference	424

3.185.1 Detailed Description	425
3.185.2 Member Function Documentation	425
3.186Ipopt::UserScaling Class Reference	425
3.186.1 Detailed Description	426
3.186.2 Member Function Documentation	427
3.187Ipopt::Vector Class Reference	427
3.187.1 Detailed Description	431
3.187.2 Constructor & Destructor Documentation	431
3.187.3 Member Function Documentation	432
3.188Ipopt::VectorSpace Class Reference	433
3.188.1 Detailed Description	434
3.188.2 Member Function Documentation	434
3.189Ipopt::WarmStartIterateInitializer Class Reference	434
3.189.1 Detailed Description	435
3.189.2 Constructor & Destructor Documentation	436
3.189.3 Member Function Documentation	436
3.190Ipopt::WsmpSolverInterface Class Reference	436
3.190.1 Detailed Description	437
3.190.2 Member Function Documentation	438
3.191Ipopt::ZeroMatrix Class Reference	438
3.191.1 Detailed Description	440
3.191.2 Member Function Documentation	440
3.192Ipopt::ZeroMatrixSpace Class Reference	441
3.192.1 Detailed Description	441
3.192.2 Member Function Documentation	441
3.193Ipopt::ZeroSymMatrix Class Reference	442
3.193.1 Detailed Description	443
3.193.2 Member Function Documentation	443
3.194Ipopt::ZeroSymMatrixSpace Class Reference	444
3.194.1 Detailed Description	445
3.194.2 Member Function Documentation	445

1 Class Index

1.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

std::basic_fstream< char >	
std::basic_fstream< wchar_t >	
std::basic_ifstream< char >	
std::basic_ifstream< wchar_t >	
std::basic_ios< char >	
std::basic_ios< wchar_t >	
std::basic_iostream< char >	
std::basic_iostream< wchar_t >	
std::basic_istream< char >	
std::basic_istream< wchar_t >	
std::basic_istreamstream< char >	
std::basic_istreamstream< wchar_t >	
std::basic_ofstream< char >	
std::basic_ofstream< wchar_t >	
std::basic_ostream< char >	
std::basic_ostream< wchar_t >	
std::basic_ostreamstream< char >	
std::basic_ostreamstream< wchar_t >	
std::basic_string< char >	
std::basic_string< wchar_t >	
std::basic_stringstream< char >	
std::basic_stringstream< wchar_t >	
Ipopt::CachedResults< T >	44
Ipopt::Filter	117
Ipopt::FilterEntry	118
Ipopt::IpoptException	183
ma77_control_d	235
ma77_info_d	235
ma86_control_d	239
ma86_info_d	240
ma97_control_d	244
ma97_info	244
mc68_control	256
mc68_info	256
Ipopt::Observer	283
Ipopt::DependentResult< T >	96
Ipopt::PiecewisePenalty	310
Ipopt::PiecewisePenEntry	311
Ipopt::AmplOptionsList::PrivatInfo	312

Ipopt::ReferencedObject	315
Ipopt::AlgorithmBuilder	21
Ipopt::InexactAlgorithmBuilder	139
Ipopt::AlgorithmStrategyObject	22
Ipopt::AugSystemSolver	35
Ipopt::AugRestoSystemSolver	33
Ipopt::GenAugSystemSolver	123
Ipopt::LowRankAugSystemSolver	219
Ipopt::LowRankSSAugSystemSolver	221
Ipopt::StdAugSystemSolver	362
Ipopt::BacktrackingLSAcceptor	40
Ipopt::CGPenaltyLSAcceptor	50
Ipopt::FilterLSAcceptor	119
Ipopt::InexactLSAcceptor	146
Ipopt::PenaltyLSAcceptor	307
Ipopt::ConvergenceCheck	74
Ipopt::OptimalityErrorConvergenceCheck	285
Ipopt::RestoConvergenceCheck	325
Ipopt::RestoFilterConvergenceCheck	326
Ipopt::RestoPenaltyConvergenceCheck	336
Ipopt::EqMultiplierCalculator	102
Ipopt::LeastSquareMultipliers	213
Ipopt::GenKKTsSolverInterface	125
Ipopt::HessianUpdater	134
Ipopt::ExactHessianUpdater	106
Ipopt::LimMemQuasiNewtonUpdater	214
Ipopt::InexactNewtonNormalStep	150
Ipopt::InexactNormalStepCalculator	151
Ipopt::InexactDoglegNormalStep	145
Ipopt::InexactPDSolver	156

Ipopt::IpoptAlgorithm	164
Ipopt::IterateInitializer	188
Ipopt::DefaultIterateInitializer	76
Ipopt::RestoIterateInitializer	332
Ipopt::WarmStartIterateInitializer	434
Ipopt::IterationOutput	199
Ipopt::OrigIterationOutput	292
Ipopt::RestoIterationOutput	334
Ipopt::IterativeSolverTerminationTester	203
Ipopt::InexactNormalTerminationTester	153
Ipopt::InexactPDTerminationTester	157
Ipopt::LineSearch	216
Ipopt::BacktrackingLineSearch	37
Ipopt::MuOracle	267
Ipopt::LoqoMuOracle	218
Ipopt::ProbingMuOracle	313
Ipopt::QualityFunctionMuOracle	314
Ipopt::MuUpdate	269
Ipopt::AdaptiveMuUpdate	19
Ipopt::MonotoneMuUpdate	258
Ipopt::PDPerturbationHandler	298
Ipopt::CGPerturbationHandler	54
Ipopt::PDSysSolver	305
Ipopt::PDFullSpaceSolver	296
Ipopt::RestorationPhase	338
Ipopt::MinC_1NrmRestorationPhase	257
Ipopt::RestoRestorationPhase	340
Ipopt::SearchDirectionCalculator	346
Ipopt::CGSearchDirCalculator	56
Ipopt::InexactSearchDirCalculator	159

Ipopt::PDSearchDirCalculator	303
Ipopt::SparseSymLinearSolverInterface	355
Ipopt::IterativePardisoSolverInterface	200
Ipopt::IterativeWsmvSolverInterface	205
Ipopt::Ma27TSolverInterface	228
Ipopt::Ma57TSolverInterface	232
Ipopt::Ma77SolverInterface	235
Ipopt::Ma86SolverInterface	240
Ipopt::Ma97SolverInterface	244
Ipopt::MumpsSolverInterface	265
Ipopt::PardisoSolverInterface	294
Ipopt::WsmvSolverInterface	436
Ipopt::SymLinearSolver	379
Ipopt::TSymLinearSolver	421
Ipopt::TDependencyDetector	395
Ipopt::Ma28TDependencyDetector	230
Ipopt::TSymDependencyDetector	420
Ipopt::TSymScalingMethod	424
Ipopt::InexactTSymScalingMethod	160
Ipopt::Mc19TSymScalingMethod	255
Ipopt::SlackBasedTSymScalingMethod	347
Ipopt::AmplOptionsList	26
Ipopt::AmplOptionsList::AmplOption	25
Ipopt::AmplSuffixHandler	28
Ipopt::IpoptAdditionalCq	162
Ipopt::CGPenaltyCq	46
Ipopt::InexactCq	140
Ipopt::IpoptAdditionalData	163
Ipopt::CGPenaltyData	48
Ipopt::InexactData	142

Ipopt::IpoptApplication	166
Ipopt::IpoptCalculatedQuantities	170
Ipopt::IpoptData	177
Ipopt::IpoptNLP	184
Ipopt::OrigIpoptNLP	289
Ipopt::RestIpoptNLP	328
Ipopt::Journal	208
Ipopt::FileJournal	115
Ipopt::StreamJournal	368
Ipopt::Journalist	210
Ipopt::MatrixSpace	253
Ipopt::CompoundMatrixSpace	62
Ipopt::DenseGenMatrixSpace	83
Ipopt::ExpandedMultiVectorMatrixSpace	109
Ipopt::ExpansionMatrixSpace	114
Ipopt::GenTMatrixSpace	130
Ipopt::MultiVectorMatrixSpace	263
Ipopt::ScaledMatrixSpace	344
Ipopt::SumMatrixSpace	374
Ipopt::SymMatrixSpace	383
Ipopt::CompoundSymMatrixSpace	66
Ipopt::DenseSymMatrixSpace	88
Ipopt::DiagMatrixSpace	101
Ipopt::IdentityMatrixSpace	137
Ipopt::LowRankUpdateSymMatrixSpace	226
Ipopt::SumSymMatrixSpace	378
Ipopt::SymScaledMatrixSpace	387
Ipopt::SymTMatrixSpace	392
Ipopt::ZeroSymMatrixSpace	444
Ipopt::TransposeMatrixSpace	416

Ipopt::ZeroMatrixSpace	441
Ipopt::NLP	270
Ipopt::NLPBoundsRemover	274
Ipopt::TNLPAdapter	405
Ipopt::NLPScalingObject	278
Ipopt::StandardScalingBase	359
Ipopt::EquilibrationScaling	104
Ipopt::GradientScaling	132
Ipopt::NoNLPScalingObject	282
Ipopt::UserScaling	425
Ipopt::OptionsList	287
Ipopt::PointPerturber	311
Ipopt::RegisteredOption	319
Ipopt::RegisteredOptions	322
Ipopt::SolveStatistics	353
Ipopt::TaggedObject	393
Ipopt::Matrix	248
Ipopt::CompoundMatrix	58
Ipopt::DenseGenMatrix	79
Ipopt::ExpandedMultiVectorMatrix	107
Ipopt::ExpansionMatrix	111
Ipopt::GenTMatrix	127
Ipopt::MultiVectorMatrix	260
Ipopt::ScaledMatrix	341
Ipopt::SumMatrix	371
Ipopt::SymMatrix	382
Ipopt::CompoundSymMatrix	64
Ipopt::DenseSymMatrix	85
Ipopt::DiagMatrix	98
Ipopt::IdentityMatrix	135

Ipopt::LowRankUpdateSymMatrix	223
Ipopt::SumSymMatrix	375
Ipopt::SymScaledMatrix	385
Ipopt::SymTMatrix	388
Ipopt::ZeroSymMatrix	442
Ipopt::TransposeMatrix	413
Ipopt::ZeroMatrix	438
Ipopt::Vector	427
Ipopt::CompoundVector	68
Ipopt::IteratesVector	189
Ipopt::DenseVector	89
Ipopt::TimingStatistics	399
Ipopt::TNLP	400
Ipopt::AmpITNLP	28
Ipopt::StdInterfaceTNLP	364
Ipopt::TNLPReducer	409
Ipopt::TripletToCSRConverter	418
Ipopt::VectorSpace	433
Ipopt::CompoundVectorSpace	73
Ipopt::IteratesVectorSpace	197
Ipopt::DenseVectorSpace	94
Ipopt::Referencer	318
Ipopt::SmartPtr< T >	348
Ipopt::RegisteredOption::string_entry	370
Ipopt::Subject	370
Ipopt::TaggedObject	393
Ipopt::TimedTask	397
Ipopt::TripletHelper	417

2 Class Index

2.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

Ipopt::AdaptiveMuUpdate	
Non-monotone mu update	19
Ipopt::AlgorithmBuilder	
Builder to create a complete IpoptAlg object	21
Ipopt::AlgorithmStrategyObject	
This is the base class for all algorithm strategy objects	22
Ipopt::AmplOptionsList::AmplOption	
Ampl Option class, contains name, type and description for an AMPL option	25
Ipopt::AmplOptionsList	
Class for storing a number of AMPL options that should be registered to the AMPL Solver library interface	26
Ipopt::AmplSuffixHandler	28
Ipopt::AmplTNLP	
Ampl Interface	28
Ipopt::AugRestoSystemSolver	
Class that converts the an augmented system with compound restoration pieces into a smaller "pivoted" system to be solved with an existing AugSystemSolver	33
Ipopt::AugSystemSolver	
Base class for Solver for the augmented system	35
Ipopt::BacktrackingLineSearch	
General implementation of a backtracking line search	37
Ipopt::BacktrackingLSAcceptor	
Base class for backtracking line search acceptors	40
Ipopt::CachedResults< T >	
Cache Priority Enum	44
Ipopt::CGPenaltyCq	
Class for all Chen-Goldfarb penalty method specific calculated quantities	46
Ipopt::CGPenaltyData	
Class to organize all the additional data required by the Chen-Goldfarb penalty function algorithm	48
Ipopt::CGPenaltyLSAcceptor	
Line search acceptor, based on the Chen-Goldfarb penalty function approach	50
Ipopt::CGPerturbationHandler	
Class for handling the perturbation factors delta_x, delta_s, delta_c, and delta_d in the primal dual system	54

Ipopt::CGSearchDirCalculator	
Implementation of the search direction calculator that computes the Chen-Goldfarb step for the current barrier and penalty parameter	56
Ipopt::CompoundMatrix	
Class for Matrices consisting of other matrices	58
Ipopt::CompoundMatrixSpace	
This is the matrix space for CompoundMatrix	62
Ipopt::CompoundSymMatrix	
Class for symmetric matrices consisting of other matrices	64
Ipopt::CompoundSymMatrixSpace	
This is the matrix space for CompoundSymMatrix	66
Ipopt::CompoundVector	
Class of Vectors consisting of other vectors	68
Ipopt::CompoundVectorSpace	
This vectors space is the vector space for CompoundVector	73
Ipopt::ConvergenceCheck	
Base class for checking the algorithm termination criteria	74
Ipopt::DefaultIterateInitializer	
Class implementing the default initialization procedure (based on user options) for the iterates	76
Ipopt::DenseGenMatrix	
Class for dense general matrices	79
Ipopt::DenseGenMatrixSpace	
This is the matrix space for DenseGenMatrix	83
Ipopt::DenseSymMatrix	
Class for dense symetrix matrices	85
Ipopt::DenseSymMatrixSpace	
This is the matrix space for DenseSymMatrix	88
Ipopt::DenseVector	
Dense Vector Implementation	89
Ipopt::DenseVectorSpace	
This vectors space is the vector space for DenseVector	94
Ipopt::DependentResult< T >	
Templated class which stores one entry for the CachedResult class	96
Ipopt::DiagMatrix	
Class for diagonal matrices	98
Ipopt::DiagMatrixSpace	
This is the matrix space for DiagMatrix	101
Ipopt::EqMultiplierCalculator	
Base Class for objects that compute estimates for the equality constraint multipliers y_c and y_d	102

Ipopt::EquilibrationScaling	
This class does problem scaling by setting the scaling parameters based on the maximum of the gradient at the user provided initial point	104
Ipopt::ExactHessianUpdater	
Implementation of the HessianUpdater for the use of exact second derivatives	106
Ipopt::ExpandedMultiVectorMatrix	
Class for Matrices with few rows that consists of Vectors, together with a premultiplied Expansion matrix	107
Ipopt::ExpandedMultiVectorMatrixSpace	
This is the matrix space for ExpandedMultiVectorMatrix	109
Ipopt::ExpansionMatrix	
Class for expansion/projection matrices	111
Ipopt::ExpansionMatrixSpace	
This is the matrix space for ExpansionMatrix	114
Ipopt::FileJournal	
FileJournal class	115
Ipopt::Filter	
Class for the filter	117
Ipopt::FilterEntry	
Class for one filter entry	118
Ipopt::FilterLSAcceptor	
Filter line search	119
Ipopt::GenAugSystemSolver	
Solver for the augmented system using GenKKTsSolverInterfaces	123
Ipopt::GenKKTsSolverInterface	
Base class for interfaces to symmetric indefinite linear solvers for generic matrices	125
Ipopt::GenTMatrix	
Class for general matrices stored in triplet format	127
Ipopt::GenTMatrixSpace	
This is the matrix space for a GenTMatrix with fixed sparsity structure	130
Ipopt::GradientScaling	
This class does problem scaling by setting the scaling parameters based on the maximum of the gradient at the user provided initial point	132
Ipopt::HessianUpdater	
Abstract base class for objects responsible for updating the Hessian information	134
Ipopt::IdentityMatrix	
Class for Matrices which are multiples of the identity matrix	135
Ipopt::IdentityMatrixSpace	
This is the matrix space for IdentityMatrix	137

Ipopt::InexactAlgorithmBuilder	Builder to create a complete IpoptAlg object for the inexact step computation version	139
Ipopt::InexactCq	Class for all Chen-Goldfarb penalty method specific calculated quantities	140
Ipopt::InexactData	Class to organize all the additional data required by the Chen-Goldfarb penalty function algorithm	142
Ipopt::InexactDoglegNormalStep	Compute the normal step using a dogleg approach	145
Ipopt::InexactLSAcceptor	Penalty function line search for the inexact step algorithm version	146
Ipopt::InexactNewtonNormalStep	Compute the "Newton" normal step from the (slack-scaled) augmented system	150
Ipopt::InexactNormalStepCalculator	Base class for computing the normal step for the inexact step calculation algorithm	151
Ipopt::InexactNormalTerminationTester	This class implements the termination tests for the primal-dual system	153
Ipopt::InexactPDSolver	This is the implemetation of the Primal-Dual System, allowing the usage of an inexact linear solver	156
Ipopt::InexactPDTerminationTester	This class implements the termination tests for the primal-dual system	157
Ipopt::InexactSearchDirCalculator	Implementation of the search direction calculator that computes the search direction using iterative linear solvers	159
Ipopt::InexactTSymScalingMethod	Class for the method for computing scaling factors for symmetric matrices in triplet format, specifically for the inexact algorithm	160
Ipopt::IpoptAdditionalCq	Base class for additional calculated quantities that is special to a particular type of algorithm, such as the CG penalty function, or using iterative linear solvers	162
Ipopt::IpoptAdditionalData	Base class for additional data that is special to a particular type of algorithm, such as the CG penalty function, or using iterative linear solvers	163
Ipopt::IpoptAlgorithm	The main ipopt algorithm class	164
Ipopt::IpoptApplication	This is the main application class for making calls to Ipopt	166
Ipopt::IpoptCalculatedQuantities	Class for all IPOPT specific calculated quantities	170
Ipopt::IpoptData	Class to organize all the data required by the algorithm	177

Ipopt::IpoptException	
This is the base class for all exceptions	183
Ipopt::IpoptNLP	
This is the abstract base class for classes that map the traditional NLP into something that is more useful by Ipopt	184
Ipopt::IterateInitializer	
Base class for all methods for initializing the iterates	188
Ipopt::IteratesVector	
Specialized CompoundVector class specifically for the algorithm iterates	189
Ipopt::IteratesVectorSpace	
Vector Space for the IteratesVector class	197
Ipopt::IterationOutput	
Base class for objects that do the output summary per iteration	199
Ipopt::IterativePardisoSolverInterface	
Interface to the linear solver Pardiso, derived from SparseSymLinearSolverInterface	200
Ipopt::IterativeSolverTerminationTester	
This base class is for the termination tests for the iterative linear solver in the inexact version of Ipopt	203
Ipopt::IterativeWsmvSolverInterface	
Interface to the linear solver WISMP, derived from SparseSymLinearSolverInterface	205
Ipopt::Journal	
Journal class (part of the Journalist implementation.)	208
Ipopt::Journalist	
Class responsible for all message output	210
Ipopt::LeastSquareMultipliers	
Class for calculator for the least-square equality constraint multipliers	213
Ipopt::LimMemQuasiNewtonUpdater	
Implementation of the HessianUpdater for limit-memory quasi-Newton approximation of the Lagrangian Hessian	214
Ipopt::LineSearch	
Base class for line search objects	216
Ipopt::LoqoMuOracle	
Implementation of the LOQO formula for computing the barrier parameter	218
Ipopt::LowRankAugSystemSolver	
Solver for the augmented system with LowRankUpdateSymMatrix Hessian matrices	219
Ipopt::LowRankSSAugSystemSolver	
Solver for the augmented system with LowRankUpdateSymMatrix Hessian matrices	221
Ipopt::LowRankUpdateSymMatrix	
Class for symmetric matrices, represented as low-rank updates	223

Ipopt::LowRankUpdateSymMatrixSpace	
This is the matrix space for LowRankUpdateSymMatrix	226
Ipopt::Ma27TSolverInterface	
Interface to the symmetric linear solver MA27, derived from SparseSymLinearSolverInterface	228
Ipopt::Ma28TDependencyDetector	
Base class for all derived algorithms for detecting linearly dependent rows in the constraint Jacobian	230
Ipopt::Ma57TSolverInterface	
Interface to the symmetric linear solver MA57, derived from SparseSymLinearSolverInterface	232
ma77_control_d	235
ma77_info_d	235
Ipopt::Ma77SolverInterface	
Base class for interfaces to symmetric indefinite linear solvers for sparse matrices	235
ma86_control_d	239
ma86_info_d	240
Ipopt::Ma86SolverInterface	
Base class for interfaces to symmetric indefinite linear solvers for sparse matrices	240
ma97_control_d	244
ma97_info	244
Ipopt::Ma97SolverInterface	
Base class for interfaces to symmetric indefinite linear solvers for sparse matrices	244
Ipopt::Matrix	
Matrix Base Class	248
Ipopt::MatrixSpace	
MatrixSpace base class, corresponding to the Matrix base class	253
Ipopt::Mc19TSymScalingMethod	
Class for the method for computing scaling factors for symmetric matrices in triplet format, using MC19	255
mc68_control	256
mc68_info	256
Ipopt::MinC_1NrmRestorationPhase	
Restoration Phase that minimizes the 1-norm of the constraint violation - using the interior point method (Ipopt)	257
Ipopt::MonotoneMuUpdate	
Monotone Mu Update	258
Ipopt::MultiVectorMatrix	
Class for Matrices with few columns that consists of Vectors	260

<code>Ipopt::MultiVectorMatrixSpace</code>	
This is the matrix space for <code>MultiVectorMatrix</code>	263
<code>Ipopt::MumpsSolverInterface</code>	
Interface to the linear solver Mumps, derived from <code>SparseSymLinearSolverInterface</code>	265
<code>Ipopt::MuOracle</code>	
Abstract Base Class for classes that are able to compute a suggested value of the barrier parameter that can be used as an oracle in the <code>NonmontoneMuUpdate</code> class	267
<code>Ipopt::MuUpdate</code>	
Abstract Base Class for classes that implement methods for computing the barrier and fraction-to-the-boundary rule parameter for the current iteration	269
<code>Ipopt::NLP</code>	
Brief Class Description	270
<code>Ipopt::NLPBoundsRemover</code>	
This is an adapter for an <code>NLP</code> that converts variable bound constraints to inequality constraints	274
<code>Ipopt::NLPScalingObject</code>	
This is the abstract base class for problem scaling	278
<code>Ipopt::NoNLPScalingObject</code>	
Class implementing the scaling object that doesn't to any scaling	282
<code>Ipopt::Observer</code>	
Slight Variation of the <code>Observer</code> Design Pattern	283
<code>Ipopt::OptimalityErrorConvergenceCheck</code>	
Brief Class Description	285
<code>Ipopt::OptionsList</code>	
This class stores a list of user set options	287
<code>Ipopt::OrigIpoptNLP</code>	
This class maps the traditional <code>NLP</code> into something that is more useful by <code>Ipopt</code>	289
<code>Ipopt::OrigIterationOutput</code>	
Class for the iteration summary output for the original <code>NLP</code>	292
<code>Ipopt::PardisoSolverInterface</code>	
Interface to the linear solver Pardiso, derived from <code>SparseSymLinearSolverInterface</code>	294
<code>Ipopt::PDFullSpaceSolver</code>	
This is the implemetation of the Primal-Dual System, using the full space approach with a direct linear solver	296
<code>Ipopt::PDPerturbationHandler</code>	
Class for handling the perturbation factors <code>delta_x</code> , <code>delta_s</code> , <code>delta_c</code> , and <code>delta_d</code> in the primal dual system	298
<code>Ipopt::PDSearchDirCalculator</code>	
Implementation of the search direction calculator that computes the pure primal dual step for the current barrier parameter	303

Ipopt::PDSystemSolver	
Pure Primal Dual System Solver Base Class	305
Ipopt::PenaltyLSAcceptor	
Penalty function line search	307
Ipopt::PiecewisePenalty	
Class for the Piecewise Penalty	310
Ipopt::PiecewisePenEntry	
Struct for one Piecewise Penalty entry	311
Ipopt::PointPerturber	
This class is a simple object for generating randomly perturbed points that are within the NLP bounds	311
Ipopt::AmplOptionsList::PrivatInfo	312
Ipopt::ProbingMuOracle	
Implementation of the probing strategy for computing the barrier parameter	313
Ipopt::QualityFunctionMuOracle	
Implementation of the probing strategy for computing the barrier parameter	314
Ipopt::ReferencedObject	
ReferencedObject class	315
Ipopt::Referencer	
Psydo-class, from which everything has to inherit that wants to use be registered as a Referencer for a ReferencedObject	318
Ipopt::RegisteredOption	
Base class for registered options	319
Ipopt::RegisteredOptions	
Class for storing registered options	322
Ipopt::RestoConvergenceCheck	
Convergence check for the restoration phase	325
Ipopt::RestoFilterConvergenceCheck	
This is the implementation of the restoration convergence check is the original algorithm used the filter globalization mechanism	326
Ipopt::RestoIpoptNLP	
This class maps the traditional NLP into something that is more useful by Ipopt	328
Ipopt::RestoIterateInitializer	
Class implementing the default initialization procedure (based on user options) for the iterates	332
Ipopt::RestoIterationOutput	
Class for the iteration summary output for the restoration phase	334
Ipopt::RestoPenaltyConvergenceCheck	
This is the implementation of the restoration convergence check is the original algorithm used the filter globalization mechanism	336

Ipopt::RestorationPhase	
Base class for different restoration phases	338
Ipopt::RestoRestorationPhase	
Recursive Restoration Phase for the MinC_1NrmRestorationPhase	340
Ipopt::ScaledMatrix	
Class for a Matrix in conjunction with its scaling factors for row and column scaling	341
Ipopt::ScaledMatrixSpace	
This is the matrix space for ScaledMatrix	344
Ipopt::SearchDirectionCalculator	
Base class for computing the search direction for the line search	346
Ipopt::SlackBasedTSymScalingMethod	
Class for the method for computing scaling factors for symmetric matrices in triplet format, specifically for the inexact algorithm	347
Ipopt::SmartPtr< T >	
Template class for Smart Pointers	348
Ipopt::SolveStatistics	
This class collects statistics about an optimization run, such as iteration count, final infeasibilities etc	353
Ipopt::SparseSymLinearSolverInterface	
Base class for interfaces to symmetric indefinite linear solvers for sparse matrices	355
Ipopt::StandardScalingBase	
This is a base class for many standard scaling techniques	359
Ipopt::StdAugSystemSolver	
Solver for the augmented system for triple type matrices	362
Ipopt::StdInterfaceTNLP	
Implementation of a TNLP for the Standard C interface	364
Ipopt::StreamJournal	
StreamJournal class	368
Ipopt::RegisteredOption::string_entry	
Class to hold the valid string settings for a string option	370
Ipopt::Subject	
Slight Variation of the Observer Design Pattern (Subject part)	370
Ipopt::SumMatrix	
Class for Matrices which are sum of matrices	371
Ipopt::SumMatrixSpace	
Class for matrix space for SumMatrix	374
Ipopt::SumSymMatrix	
Class for Matrices which are sum of symmetric matrices	375

Ipopt::SumSymMatrixSpace	378
Class for matrix space for SumSymMatrix	
Ipopt::SymLinearSolver	379
Base class for all derived symmetric linear solvers	
Ipopt::SymMatrix	382
This is the base class for all derived symmetric matrix types	
Ipopt::SymMatrixSpace	383
SymMatrixSpace base class, corresponding to the SymMatrix base class	
Ipopt::SymScaledMatrix	385
Class for a Matrix in conjunction with its scaling factors for row and column scaling	
Ipopt::SymScaledMatrixSpace	387
This is the matrix space for SymScaledMatrix	
Ipopt::SymTMatrix	388
Class for symmetric matrices stored in triplet format	
Ipopt::SymTMatrixSpace	392
This is the matrix space for a SymTMatrix with fixed sparsity structure	
Ipopt::TaggedObject	393
TaggedObject class	
Ipopt::TDependencyDetector	395
Base class for all derived algorithms for detecting linearly dependent rows in the constraint Jacobian	
Ipopt::TimedTask	397
This class is used to collect timing information for a particular task	
Ipopt::TimingStatistics	399
This class collects all timing statistics for Ipopt	
Ipopt::TNLP	400
Base class for all NLP 's that use standard triplet matrix form and dense vectors	
Ipopt::TNLPAdapter	405
This class Adapts the TNLP interface so it looks like an NLP interface	
Ipopt::TNLPReducer	409
This is a wrapper around a given TNLP class that takes out a list of constraints that are given to the constructor	
Ipopt::TransposeMatrix	413
Class for Matrices which are the transpose of another matrix	
Ipopt::TransposeMatrixSpace	416
This is the matrix space for TransposeMatrix	
Ipopt::TripletHelper	417

[Ipopt::TripletToCSRConverter](#)

Class for converting symmetric matrices given in triplet format to matrices in compressed sparse row (CSR) format of the upper triangular part (or, equivalently, compressed sparse column (CSC) format for the lower triangular part)

418

[Ipopt::TSymDependencyDetector](#)

Base class for all derived algorithms for detecting linearly dependent rows in the constraint Jacobian

420

[Ipopt::TSymLinearSolver](#)

General driver for linear solvers for sparse indefinite symmetric matrices

421

[Ipopt::TSymScalingMethod](#)

Base class for the method for computing scaling factors for symmetric matrices in triplet format

424

[Ipopt::UserScaling](#)

This class does problem scaling by getting scaling parameters from the user (through the [NLP](#) interface)

425

[Ipopt::Vector](#)

[Vector](#) Base Class

427

[Ipopt::VectorSpace](#)

[VectorSpace](#) base class, corresponding to the [Vector](#) base class

433

[Ipopt::WarmStartIterateInitializer](#)

Class implementing an initialization procedure for warm starts

434

[Ipopt::WsmvSolverInterface](#)

Interface to the linear solver Wsmv, derived from [SparseSymLinearSolverInterface](#)

436

[Ipopt::ZeroMatrix](#)

Class for Matrices with only zero entries

438

[Ipopt::ZeroMatrixSpace](#)

Class for matrix space for [ZeroMatrix](#)

441

[Ipopt::ZeroSymMatrix](#)

Class for Symmetric Matrices with only zero entries

442

[Ipopt::ZeroSymMatrixSpace](#)

Class for matrix space for [ZeroSymMatrix](#)

444


3 Class Documentation

3.1 Ipopt::AdaptiveMuUpdate Class Reference

Non-monotone mu update.

```
#include <IpAdaptiveMuUpdate.hpp>
```

Inheritance diagram for Ipopt::AdaptiveMuUpdate:

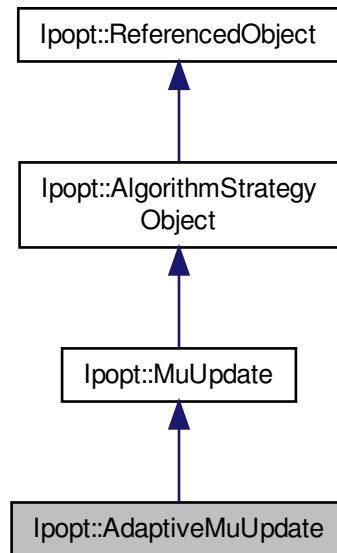

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
Initialize method - overloaded from [AlgorithmStrategyObject](#).
- virtual bool [UpdateBarrierParameter](#) ()
Method for determining the barrier parameter for the next iteration.

Constructors/Destructors

- [AdaptiveMuUpdate](#) (const [SmartPtr](#)< [LineSearch](#) > &linesearch, const [SmartPtr](#)< [MuOracle](#) > &free_mu_oracle, const [SmartPtr](#)< [MuOracle](#) > &fix_mu_oracle=NULL)
Constructor.
- virtual [~AdaptiveMuUpdate](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members

3.1.1 Detailed Description

Non-monotone mu update.

Definition at line 23 of file IpAdaptiveMuUpdate.hpp.

3.1.2 Member Function Documentation

3.1.2.1 virtual bool Ipopt::AdaptiveMuUpdate::UpdateBarrierParameter () [virtual]

Method for determining the barrier parameter for the next iteration.

When the optimality error for the current barrier parameter is less than a tolerance, the barrier parameter is reduced, and the Reset method of the [LineSearch](#) object linesearch is called.

Implements [Ipopt::MuUpdate](#).

The documentation for this class was generated from the following file:


- IpAdaptiveMuUpdate.hpp

3.2 Ipopt::AlgorithmBuilder Class Reference

Builder to create a complete IpoptAlg object.

```
#include <IpAlgBuilder.hpp>
```

Inheritance diagram for Ipopt::AlgorithmBuilder:

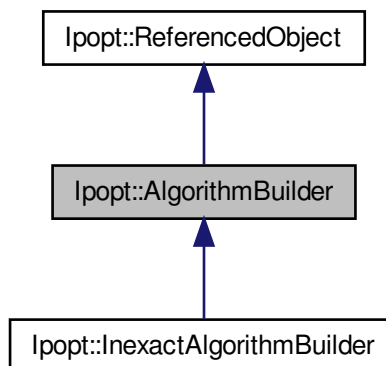

Public Member Functions

Constructors/Destructors

- [AlgorithmBuilder](#) ([SmartPtr](#) < [AugSystemSolver](#) > custom_solver=NULL)
Constructor.

- virtual [~AlgorithmBuilder](#) ()
Destructor.

Methods to build parts of the algorithm

- virtual void **BuildIpoptObjects** (const [Journalist](#) &jnlst, const [OptionsList](#) &options, const std::string &prefix, const [SmartPtr](#)< [NLP](#) > &nlp, [SmartPtr](#)< [IpoptNLP](#) > &ip_nlp, [SmartPtr](#)< [IpoptData](#) > &ip_data, [SmartPtr](#)< [IpoptCalculatedQuantities](#) > &ip_cq)
- virtual [SmartPtr](#)< [IpoptAlgorithm](#) > **BuildBasicAlgorithm** (const [Journalist](#) &jnlst, const [OptionsList](#) &options, const std::string &prefix)

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
Methods for IpoptTypeInfo.

3.2.1 Detailed Description

Builder to create a complete IpoptAlg object.

This object contains all subelements (such as line search objects etc). How the resulting IpoptAlg object is built can be influenced by the options.

The optional argument custom_solver allows the expert user to provide a specialized linear solver (e.g., of the type [GenAugSystemSolver](#)), possibly for selfmade matrix objects.

TODO: Currently, this is a basic implementation with everything in one method that can be overloaded. This will need to be expanded to allow customization of different parts without recoding everything.

Definition at line 32 of file IpAlgBuilder.hpp.

3.2.2 Member Function Documentation

3.2.2.1 static void Ipopt::AlgorithmBuilder::RegisterOptions ([SmartPtr](#)< [RegisteredOptions](#) > roptions) [static]

Methods for IpoptTypeInfo.

register the options used by the algorithm builder

Reimplemented in [Ipopt::InexactAlgorithmBuilder](#).

The documentation for this class was generated from the following file:


- IpAlgBuilder.hpp

3.3 Ipopt::AlgorithmStrategyObject Class Reference

This is the base class for all algorithm strategy objects.

```
#include <IpAlgStrategy.hpp>
```

Inheritance diagram for Ipopt::AlgorithmStrategyObject:

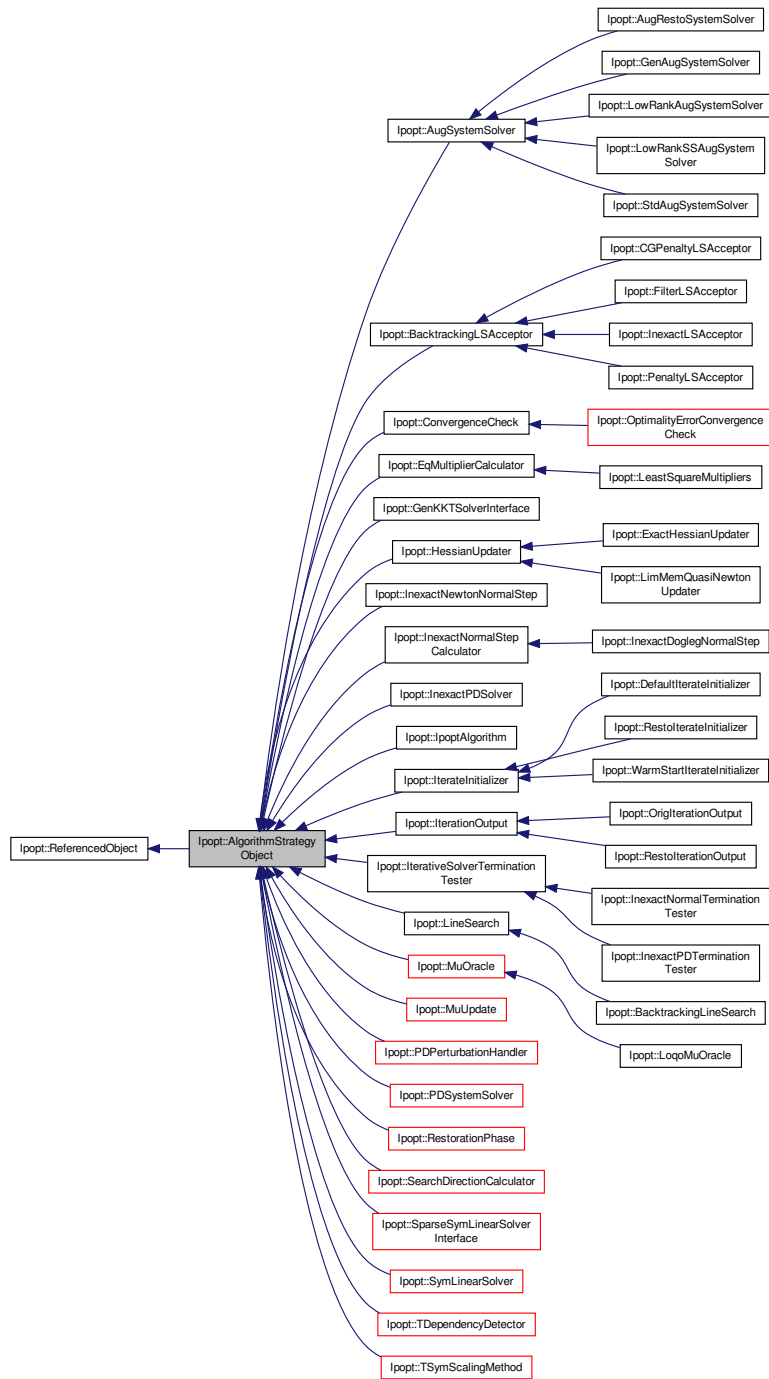

Public Member Functions

- bool **Initialize** (const [Journalist](#) &jnlst, [IpoptNLP](#) &ip_nlp, [IpoptData](#) &ip_data, [IpoptCalculatedQuantities](#) &ip_cq, const [OptionsList](#) &options, const std::string &prefix)

This method is called every time the algorithm starts again - it is used to reset any internal state.

- bool [ReducedInitialize](#) (const [Journalist](#) &jnlst, const [OptionsList](#) &options, const std::string &prefix)

Reduced version of the Initialize method, which does not require special Ipopt information.

Constructors/Destructors

- [AlgorithmStrategyObject](#) ()
Default Constructor.
- virtual [~AlgorithmStrategyObject](#) ()
Default Destructor.

Protected Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
Implementation of the initialization method that has to be overloaded by for each derived class.

Accessor methods for the problem defining objects.

Those should be used by the derived classes.

- const [Journalist](#) & [Jnlst](#) () const
- [IpoptNLP](#) & [IpNLP](#) () const
- [IpoptData](#) & [IpData](#) () const
- [IpoptCalculatedQuantities](#) & [IpCq](#) () const
- bool [HaveIpData](#) () const

3.3.1 Detailed Description

This is the base class for all algorithm strategy objects.

The [AlgorithmStrategyObject](#) base class implements a common interface for all algorithm strategy objects. A strategy object is a component of the algorithm for which different alternatives or implementations exists. It allows to compose the algorithm before execution for a particular configuration, without the need to call alternatives based on enums. For example, the [LineSearch](#) object is a strategy object, since different line search options might be used for different runs.

This interface is used for things that are done to all strategy objects, like initialization and setting options.

Definition at line 35 of file `IpAlgStrategy.hpp`.

3.3.2 Member Function Documentation

3.3.2.1 bool Ipopt::AlgorithmStrategyObject::Initialize (const [Journalist](#) & jnlst, [IpoptNLP](#) & ip_nlp, [IpoptData](#) & ip_data, [IpoptCalculatedQuantities](#) & ip_cq, const [OptionsList](#) & options, const std::string & prefix) [inline]

This method is called every time the algorithm starts again - it is used to reset any internal state.

The pointers to the [Journalist](#), as well as to the [IpoptNLP](#), [IpoptData](#), and [IpoptCalculatedQuantities](#) objects should be stored in the instantiation of this base class. This method is also used to get all required user options from the [Options-List](#). Here, if prefix is given, each tag (identifying the options) is first looked for with the prefix in front, and if not found, without the prefix. Note: you should not cue off of the iteration count to indicate the "start" of an algorithm!

Do not overload this method, since it does some general initialization that is common for all strategy objects. Overload the protected `InitializeImpl` method instead.

Definition at line 66 of file `IpAlgStrategy.hpp`.

3.3.2.2 `bool Ipopt::AlgorithmStrategyObject::ReducedInitialize ( const Journalist & jnlst, const OptionsList & options, const std::string & prefix ) [inline]`

Reduced version of the Initialize method, which does not require special Ipopt information.

This is useful for algorithm objects that could be used outside Ipopt, such as linear solvers.

Definition at line 92 of file IpAlgStrategy.hpp.

3.3.2.3 `virtual bool Ipopt::AlgorithmStrategyObject::InitializeImpl ( const OptionsList & options, const std::string & prefix ) [protected], [pure virtual]`

Implementation of the initialization method that has to be overloaded by for each derived class.

Implemented in [Ipopt::Ma97SolverInterface](#), [Ipopt::Ma86SolverInterface](#), [Ipopt::Ma77SolverInterface](#), [Ipopt::SparseSymLinearSolverInterface](#), [Ipopt::PDSysSystemSolver](#), [Ipopt::IpoptAlgorithm](#), [Ipopt::SymLinearSolver](#), [Ipopt::BacktrackingLineSearch](#), [Ipopt::IterativeSolverTerminationTester](#), [Ipopt::AugSystemSolver](#), [Ipopt::TSymLinearSolver](#), [Ipopt::PDFullSpaceSolver](#), [Ipopt::RestorationPhase](#), [Ipopt::ConvergenceCheck](#), [Ipopt::DefaultIterateInitializer](#), [Ipopt::RestoFilterConvergenceCheck](#), [Ipopt::RestoPenaltyConvergenceCheck](#), [Ipopt::RestoConvergenceCheck](#), [Ipopt::AugRestoSystemSolver](#), [Ipopt::LowRankSSAugSystemSolver](#), [Ipopt::MinC_1NrmRestorationPhase](#), [Ipopt::InexactPDSolver](#), [Ipopt::StdAugSystemSolver](#), [Ipopt::Ma57TSolverInterface](#), [Ipopt::IterativePardisoSolverInterface](#), [Ipopt::LimMemQuasiNewtonUpdater](#), [Ipopt::RestoIterateInitializer](#), [Ipopt::MumpsSolverInterface](#), [Ipopt::InexactSearchDirCalculator](#), [Ipopt::FilterLSAcceptor](#), [Ipopt::PenaltyLSAcceptor](#), [Ipopt::RestoIterationOutput](#), [Ipopt::RestoRestorationPhase](#), [Ipopt::CGPenaltyLSAcceptor](#), [Ipopt::CGPerturbationHandler](#), [Ipopt::CGSearchDirCalculator](#), [Ipopt::InexactLSAcceptor](#), [Ipopt::InexactTSymScalingMethod](#), [Ipopt::AdaptiveMuUpdate](#), [Ipopt::HessianUpdater](#), [Ipopt::IterateInitializer](#), [Ipopt::IterationOutput](#), [Ipopt::LeastSquareMultipliers](#), [Ipopt::LowRankAugSystemSolver](#), [Ipopt::PDPerturbationHandler](#), [Ipopt::PardisoSolverInterface](#), [Ipopt::WsmpSolverInterface](#), [Ipopt::BacktrackingLSAcceptor](#), [Ipopt::IterativeWsmpSolverInterface](#), [Ipopt::SlackBasedTSymScalingMethod](#), [Ipopt::TSymScalingMethod](#), [Ipopt::InexactNormalStepCalculator](#), [Ipopt::EqMultiplierCalculator](#), [Ipopt::ExactHessianUpdater](#), [Ipopt::GenAugSystemSolver](#), [Ipopt::MonotoneMuUpdate](#), [Ipopt::MuOracle](#), [Ipopt::MuUpdate](#), [Ipopt::SearchDirectionCalculator](#), [Ipopt::InexactDoglegNormalStep](#), [Ipopt::InexactNewtonNormalStep](#), [Ipopt::InexactNormalTerminationTester](#), [Ipopt::InexactPDTerminationTester](#), [Ipopt::PDSearchDirCalculator](#), [Ipopt::QualityFunctionMuOracle](#), [Ipopt::WarmStartIterateInitializer](#), [Ipopt::Mc19TSymScalingMethod](#), [Ipopt::OptimalityErrorConvergenceCheck](#), [Ipopt::ProbingMuOracle](#), [Ipopt::GenKKTSolverInterface](#), [Ipopt::TDependencyDetector](#), [Ipopt::LoqoMuOracle](#), [Ipopt::OrigIterationOutput](#), [Ipopt::Ma27TSolverInterface](#), [Ipopt::TSymDependencyDetector](#), and [Ipopt::Ma28TDependencyDetector](#).

The documentation for this class was generated from the following file:


- IpAlgStrategy.hpp

3.4 Ipopt::AmplOptionsList::AmplOption Class Reference

Ampl Option class, contains name, type and description for an AMPL option.

```
#include <AmplTNLP.hpp>
```

Inheritance diagram for Ipopt::AmplOptionsList::AmplOption:



3.4.1 Detailed Description

Ampl Option class, contains name, type and description for an AMPL option.

Definition at line 115 of file AmplTNLP.hpp.

The documentation for this class was generated from the following file:


- AmplTNLP.hpp

3.5 Ipopt::AmplOptionsList Class Reference

Class for storing a number of AMPL options that should be registered to the AMPL Solver library interface.

```
#include <AmplTNLP.hpp>
```

Inheritance diagram for Ipopt::AmplOptionsList:



Classes

- class [AmplOption](#)

Ampl Option class, contains name, type and description for an AMPL option.

- class [PrivatInfo](#)

Public Member Functions

- [AmplOptionsList](#) ()
Default Constructor.
- [~AmplOptionsList](#) ()
Destructor.
- void [AddAmplOption](#) (const std::string ampl_option_name, const std::string ipopt_option_name, AmplOptionsList::AmplOptionType type, const std::string description)
Adding a new AMPL Option.
- Index [NumberOfAmplOptions](#) ()
Number of AMPL Options.
- void * [Keywords](#) (const [SmartPtr](#)< [OptionsList](#) > &options, [SmartPtr](#)< const [Journalist](#) > jnlst, void **error)
ASL keywords list for the stored options.

3.5.1 Detailed Description

Class for storing a number of AMPL options that should be registered to the AMPL Solver library interface.

Definition at line 102 of file AmplTNLP.hpp.

3.5.2 Member Function Documentation

3.5.2.1 void* [Ipopt::AmplOptionsList::Keywords](#) (const [SmartPtr](#)< [OptionsList](#) > & options, [SmartPtr](#)< const [Journalist](#) > jnlst, void ** error)


ASL keywords list for the stored options.

The documentation for this class was generated from the following file:

- AmplTNLP.hpp

3.6 Ipopt::AmplSuffixHandler Class Reference

Inheritance diagram for Ipopt::AmplSuffixHandler:



Friends

- class [AmplTNLP](#)
Method called by [AmplTNLP](#) to retrieve the suffixes from asl.

3.6.1 Detailed Description

Definition at line 27 of file AmplTNLP.hpp.

The documentation for this class was generated from the following file:


- AmplTNLP.hpp

3.7 Ipopt::AmplTNLP Class Reference

Ampl Interface.

```
#include <AmplTNLP.hpp>
```

Inheritance diagram for Ipopt::AmplTNLP:

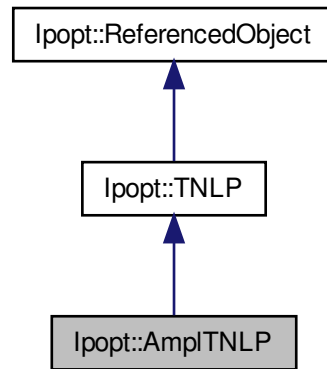

Public Member Functions

- [DECLARE_STD_EXCEPTION](#) (NONPOSITIVE_SCALING_FACTOR)
Exceptions.
- void [set_active_objective](#) (Index obj_no)
A method for setting the index of the objective function to be considered.
- [SmartPointer< AmplSuffixHandler > get_suffix_handler](#) ()
Method for returning the suffix handler.

Constructors/Destructors

- [AmplTNLP](#) (const [SmartPointer< const Journalist > &jnlst](#), const [SmartPointer< OptionsList > options](#), char **&argv, [SmartPointer< AmplSuffixHandler > suffix_handler](#)=NULL, bool allow_discrete=false, [SmartPointer< AmplOptionsList > ampl_options_list](#)=NULL, const char *ampl_option_string=NULL, const char *ampl_invocation_string=NULL, const char *ampl_banner_string=NULL, std::string *nl_file_content=NULL)
Constructor.
- virtual [~AmplTNLP](#) ()
Default destructor.

methods to gather information about the NLP. These

methods are overloaded from [TNLP](#).

See [TNLP](#) for their more detailed documentation.

- virtual bool [get_nlp_info](#) (Index &n, Index &m, Index &nnz_jac_g, Index &nnz_h_lag, [IndexStyleEnum](#) &index_style)
returns dimensions of the nlp.
- virtual bool [get_var_con_metadata](#) (Index n, StringMetaDataMapType &var_string_md, IntegerMetaDataMapType &var_integer_md, NumericMetaDataMapType &var_numeric_md, Index m, StringMetaDataMapType &con_string_md, IntegerMetaDataMapType &con_integer_md, NumericMetaDataMapType &con_numeric_md)

- returns names and other meta data for the variables and constraints Overloaded from [TNLP](#)*
- virtual bool [get_bounds_info](#) (Index n, Number *x_l, Number *x_u, Index m, Number *g_l, Number *g_u)
returns bounds of the nlp.
- virtual bool [get_constraints_linearity](#) (Index m, [LinearityType](#) *const_types)
Returns the constraint linearity.
- virtual bool [get_starting_point](#) (Index n, bool init_x, Number *x, bool init_z, Number *z_L, Number *z_U, Index m, bool init_lambda, Number *lambda)
provides a starting point for the nlp variables.
- virtual bool [eval_f](#) (Index n, const Number *x, bool new_x, Number &obj_value)
evaluates the objective value for the nlp.
- virtual bool [eval_grad_f](#) (Index n, const Number *x, bool new_x, Number *grad_f)
evaluates the gradient of the objective for the nlp.
- virtual bool [eval_g](#) (Index n, const Number *x, bool new_x, Index m, Number *g)
evaluates the constraint residuals for the nlp.
- virtual bool [eval_jac_g](#) (Index n, const Number *x, bool new_x, Index m, Index nele_jac, Index *iRow, Index *jCol, Number *values)
specifies the jacobian structure (if values is NULL) and evaluates the jacobian values (if values is not NULL) for the nlp.
- virtual bool [eval_h](#) (Index n, const Number *x, bool new_x, Number obj_factor, Index m, const Number *lambda, bool new_lambda, Index nele_hess, Index *iRow, Index *jCol, Number *values)
specifies the structure of the hessian of the lagrangian (if values is NULL) and evaluates the values (if values is not NULL).
- virtual bool [get_scaling_parameters](#) (Number &obj_scaling, bool &use_x_scaling, Index n, Number *x_scaling, bool &use_g_scaling, Index m, Number *g_scaling)
retrieve the scaling parameters for the variables, objective function, and constraints.

Solution Methods

- virtual void [finalize_solution](#) (SolverReturn status, Index n, const Number *x, const Number *z_L, const Number *z_U, Index m, const Number *g, const Number *lambda, Number obj_value, const [IpoptData](#) *ip_data, [IpoptCalculatedQuantities](#) *ip_cq)
This method is called when the algorithm is complete so the [TNLP](#) can store/write the solution.

Method for quasi-Newton approximation information.

- virtual Index [get_number_of_nonlinear_variables](#) ()
- virtual bool [get_list_of_nonlinear_variables](#) (Index num_nonlin_vars, Index *pos_nonlin_vars)

Ampl specific methods

- ASL_pfgH * [AmplSolverObject](#) ()
Return the ampl solver object (ASL)*
- void [write_solution_file](#) (const std::string &message) const
Write the solution file.
- void [get_discrete_info](#) (Index &nlvb_, Index &nlvbi_, Index &nlvc_, Index &nlvci_, Index &nlvo_, Index &nlvoi_, Index &nbv_, Index &niv_) const
ampl orders the variables like (continuous, binary, integer).

Methods to set meta data for the variables

and constraints.

These values will be passed on to the [TNLP](#) in [get_var_con_meta_data](#)

- void [set_string_metadata_for_var](#) (std::string tag, std::vector< std::string > meta_data)
- void [set_integer_metadata_for_var](#) (std::string tag, std::vector< Index > meta_data)
- void [set_numeric_metadata_for_var](#) (std::string tag, std::vector< Number > meta_data)
- void [set_string_metadata_for_con](#) (std::string tag, std::vector< std::string > meta_data)
- void [set_integer_metadata_for_con](#) (std::string tag, std::vector< Index > meta_data)
- void [set_numeric_metadata_for_con](#) (std::string tag, std::vector< Number > meta_data)

Additional Inherited Members

3.7.1 Detailed Description

Ampl Interface.

Ampl Interface, implemented as a [TNLP](#).

Definition at line 271 of file AmplTNLP.hpp.

3.7.2 Constructor & Destructor Documentation

3.7.2.1 `Ipopt::AmplTNLP::AmplTNLP (const SmartPtr< const Journalist > & jnlst, const SmartPtr< OptionsList > options, char **& argv, SmartPtr< AmplSuffixHandler > suffix_handler = NULL, bool allow_discrete = false, SmartPtr< AmplOptionsList > ampl_options_list = NULL, const char * ampl_option_string = NULL, const char * ampl_invocation_string = NULL, const char * ampl_banner_string = NULL, std::string * nl_file_content = NULL)`

Constructor.

3.7.3 Member Function Documentation

3.7.3.1 `virtual bool Ipopt::AmplTNLP::get_nlp_info ( Index & n, Index & m, Index & nnz_jac_g, Index & nnz_h_lag, IndexStyleEnum & index_style ) [virtual]`

returns dimensions of the nlp.

Overloaded from [TNLP](#)

Implements [Ipopt::TNLP](#).

3.7.3.2 `virtual bool Ipopt::AmplTNLP::get_bounds_info ( Index n, Number * x_l, Number * x_u, Index m, Number * g_l, Number * g_u ) [virtual]`

returns bounds of the nlp.

Overloaded from [TNLP](#)

Implements [Ipopt::TNLP](#).

3.7.3.3 `virtual bool Ipopt::AmplTNLP::get_constraints_linearity ( Index m, LinearityType * const types ) [virtual]`

Returns the constraint linearity.

array will be allocated with length n. (default implementation just return false and does not fill the array).

Reimplemented from [Ipopt::TNLP](#).

3.7.3.4 `virtual bool Ipopt::AmplTNLP::get_starting_point ( Index n, bool init_x, Number * x, bool init_z, Number * z_L, Number * z_U, Index m, bool init_lambda, Number * lambda ) [virtual]`

provides a starting point for the nlp variables.

Overloaded from [TNLP](#)

Implements [Ipopt::TNLP](#).

3.7.3.5 `virtual bool Ipopt::AmplTNLP::eval_f ( Index n, const Number * x, bool new_x, Number & obj_value ) [virtual]`

evaluates the objective value for the nlp.

Overloaded from [TNLP](#)

Implements [Ipopt::TNLP](#).

3.7.3.6 `virtual bool Ipopt::AmplTNLP::eval_grad_f( Index n, const Number * x, bool new_x, Number * grad_f ) [virtual]`

evaluates the gradient of the objective for the

nlp.

Overloaded from [TNLP](#)

Implements [Ipopt::TNLP](#).

3.7.3.7 `virtual bool Ipopt::AmplTNLP::eval_g( Index n, const Number * x, bool new_x, Index m, Number * g ) [virtual]`

evaluates the constraint residuals for the nlp.

Overloaded from [TNLP](#)

Implements [Ipopt::TNLP](#).

3.7.3.8 `virtual bool Ipopt::AmplTNLP::eval_jac_g( Index n, const Number * x, bool new_x, Index m, Index nele_jac, Index * iRow, Index * jCol, Number * values ) [virtual]`

specifies the jacobian structure (if values is NULL) and evaluates the jacobian values (if values is not NULL) for the nlp.

Overloaded from [TNLP](#)

Implements [Ipopt::TNLP](#).

3.7.3.9 `virtual bool Ipopt::AmplTNLP::eval_h( Index n, const Number * x, bool new_x, Number obj_factor, Index m, const Number * lambda, bool new_lambda, Index nele_hess, Index * iRow, Index * jCol, Number * values ) [virtual]`

specifies the structure of the hessian of the lagrangian (if values is NULL) and evaluates the values (if values is not NULL).

Overloaded from [TNLP](#)

Reimplemented from [Ipopt::TNLP](#).

3.7.3.10 `virtual bool Ipopt::AmplTNLP::get_scaling_parameters( Number & obj_scaling, bool & use_x_scaling, Index n, Number * x_scaling, bool & use_g_scaling, Index m, Number * g_scaling ) [virtual]`

retrieve the scaling parameters for the variables, objective function, and constraints.

Reimplemented from [Ipopt::TNLP](#).

3.7.3.11 `void Ipopt::AmplTNLP::write_solution_file( const std::string & message ) const`

Write the solution file.

This is a wrapper for AMPL's write_sol. TODO Maybe this should be at a different place, or collect the numbers itself?

3.7.3.12 `void Ipopt::AmplTNLP::get_discrete_info( Index & nlvb_, Index & nlvbi_, Index & nlvc_, Index & nlvci_, Index & nlvo_, Index & nlvoi_, Index & nbv_, Index & niv_ ) const`

ampl orders the variables like (continuous, binary, integer).

This method gives the number of binary and integer variables. For details, see Tables 3 and 4 in "Hooking Your Solver to AMPL"

3.7.3.13 void Ipopt::AmplTNLP::set_active_objective (Index *obj_no*)

A method for setting the index of the objective function to be considered.

This method must be called after the constructor, and before anything else is called. It can only be called once, and if there is more than one objective function in the AMPL model, it MUST be called.

The documentation for this class was generated from the following file:


- AmplTNLP.hpp

3.8 Ipopt::AugRestoSystemSolver Class Reference

Class that converts the an augmented system with compound restoration pieces into a smaller "pivoted" system to be solved with an existing [AugSystemSolver](#).

```
#include <IpAugRestoSystemSolver.hpp>
```

Inheritance diagram for Ipopt::AugRestoSystemSolver:

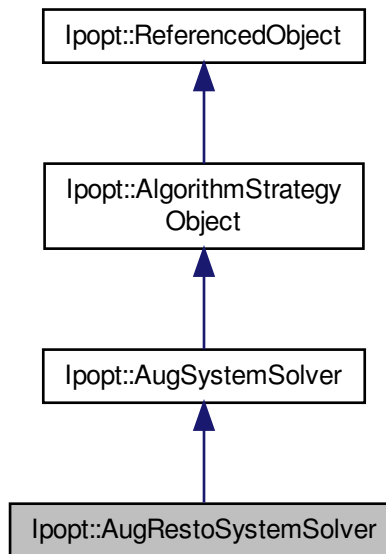

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual ESymSolverStatus [Solve](#) (const [SymMatrix](#) *W, double W_factor, const [Vector](#) *D_x, double delta_x, const [Vector](#) *D_s, double delta_s, const [Matrix](#) *J_c, const [Vector](#) *D_c, double delta_c, const [Matrix](#) *J_d, const [Vector](#) *D_d, double delta_d, const [Vector](#) &rhs_x, const [Vector](#) &rhs_s, const [Vector](#) &rhs_c, const [Vector](#) &rhs_d, [Vector](#) &sol_x, [Vector](#) &sol_s, [Vector](#) &sol_c, [Vector](#) &sol_d, bool check_NegEVals, Index numberOfNegEVals)

Translate the augmented system (in the full space of the restoration variables) into the smaller space of the original variables.

- virtual Index [NumberOfNegEVals](#) () const

Returns the number of negative eigenvalues from the original augmented system call.

- virtual bool [ProvidesInertia](#) () const

Query whether inertia is computed by linear solver.

- virtual bool [IncreaseQuality](#) ()

Request to increase quality of solution for next solve.

Constructors/Destructors

- [AugRestoSystemSolver](#) ([AugSystemSolver](#) &orig_aug_solver, bool skip_orig_aug_solver_init=true)

Constructor.

- virtual [~AugRestoSystemSolver](#) ()

Default destructor.

Additional Inherited Members

3.8.1 Detailed Description

Class that converts the an augmented system with compound restoration pieces into a smaller "pivoted" system to be solved with an existing [AugSystemSolver](#).

This is really a decorator that changes the behavior of the [AugSystemSolver](#) to account for the known structure of the restoration phase.

Definition at line 23 of file IpAugRestoSystemSolver.hpp.

3.8.2 Constructor & Destructor Documentation

3.8.2.1 Ipopt::AugRestoSystemSolver::AugRestoSystemSolver ([AugSystemSolver](#) & orig_aug_solver, bool skip_orig_aug_solver_init = true)

Constructor.

Here, orig_aug_solver is the object for solving the original augmented system. The flag skip_orig_aug_solver_init indicates, if the initialization call (to Initialize) should be skipped; this flag will usually be true, so that the symbolic factorization of the main algorithm will be used.

3.8.3 Member Function Documentation

3.8.3.1 virtual bool Ipopt::AugRestoSystemSolver::ProvidesInertia () const [inline],[virtual]

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implements [Ipopt::AugSystemSolver](#).

Definition at line 84 of file IpAugRestoSystemSolver.hpp.

3.8.3.2 virtual bool Ipopt::AugRestoSystemSolver::IncreaseQuality () [inline],[virtual]

Request to increase quality of solution for next solve.

Ask underlying linear solver to increase quality of solution for the next solve (e.g. increase pivot tolerance). Returns false, if this is not possible (e.g. maximal pivot tolerance already used.)

Implements [Ipopt::AugSystemSolver](#).

Definition at line 95 of file IpAugRestoSystemSolver.hpp.

The documentation for this class was generated from the following file:


- IpAugRestoSystemSolver.hpp

3.9 Ipopt::AugSystemSolver Class Reference

Base class for Solver for the augmented system.

```
#include <IpAugSystemSolver.hpp>
```

Inheritance diagram for Ipopt::AugSystemSolver:

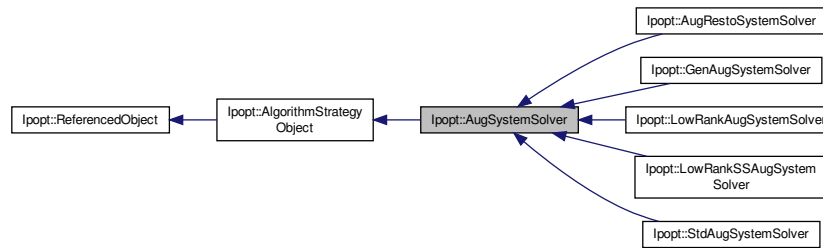

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
overloaded from [AlgorithmStrategyObject](#)
- virtual ESymSolverStatus [Solve](#) (const [SymMatrix](#) *W, double W_factor, const [Vector](#) *D_x, double delta_x, const [Vector](#) *D_s, double delta_s, const [Matrix](#) *J_c, const [Vector](#) *D_c, double delta_c, const [Matrix](#) *J_d, const [Vector](#) *D_d, double delta_d, const [Vector](#) &rhs_x, const [Vector](#) &rhs_s, const [Vector](#) &rhs_c, const [Vector](#) &rhs_d, const [Vector](#) &sol_x, const [Vector](#) &sol_s, const [Vector](#) &sol_c, const [Vector](#) &sol_d, bool check_NegEVals, Index numberOfNegEVals)
Set up the augmented system and solve it for a given right hand side.
- virtual ESymSolverStatus [MultiSolve](#) (const [SymMatrix](#) *W, double W_factor, const [Vector](#) *D_x, double delta_x, const [Vector](#) *D_s, double delta_s, const [Matrix](#) *J_c, const [Vector](#) *D_c, double delta_c, const [Matrix](#) *J_d, const [Vector](#) *D_d, double delta_d, std::vector< [SmartPtr](#)< const [Vector](#) > > &rhs_xV, std::vector< [SmartPtr](#)< const [Vector](#) > > &rhs_sV, std::vector< [SmartPtr](#)< const [Vector](#) > > &rhs_cV, std::vector< [SmartPtr](#)< const [Vector](#) > > &rhs_dV, std::vector< [SmartPtr](#)< [Vector](#) > > &sol_xV, std::vector< [SmartPtr](#)< [Vector](#) > > &sol_sV, std::vector< [SmartPtr](#)< [Vector](#) > > &sol_cV, std::vector< [SmartPtr](#)< [Vector](#) > > &sol_dV, bool check_NegEVals, Index numberOfNegEVals)
Like Solve, but for multiple right hand sides.
- virtual Index [NumberOfNegEVals](#) () const =0
Number of negative eigenvalues detected during last solve.

- virtual bool [ProvidesInertia](#) () const =0
Query whether inertia is computed by linear solver.
- virtual bool [IncreaseQuality](#) ()=0
Request to increase quality of solution for next solve.

Constructors/Destructors

- [AugSystemSolver](#) ()
Default constructor.
- virtual [~AugSystemSolver](#) ()
Default destructor.

Additional Inherited Members

3.9.1 Detailed Description

Base class for Solver for the augmented system.

This is the base class for linear solvers that solve the augmented system, which is defined as

$$\begin{bmatrix} W + D_x + \delta_x I & 0 & J_c^T & J_d^T \\ 0 & D_s + \delta_s I & 0 & -I \\ J_c & 0 & D_c - \delta_c I & 0 \\ J_d & -I & 0 & D_d - \delta_d I \end{bmatrix} \begin{pmatrix} sol_x \\ sol_s \\ sol_c \\ sol_d \end{pmatrix} = \begin{pmatrix} rhs_x \\ rhs_s \\ rhs_c \\ rhs_d \end{pmatrix}$$

Since this system might be solved repeatedly for different right hand sides, it is desirable to step the factorization of a direct linear solver if possible.

Definition at line 37 of file IpAugSystemSolver.hpp.

3.9.2 Constructor & Destructor Documentation

3.9.2.1 Ipopt::AugSystemSolver::AugSystemSolver () [inline]

Default constructor.

Definition at line 43 of file IpAugSystemSolver.hpp.

3.9.3 Member Function Documentation

3.9.3.1 virtual ESymSolverStatus Ipopt::AugSystemSolver::Solve (const SymMatrix * *W*, double *W_factor*, const Vector * *D_x*, double *delta_x*, const Vector * *D_s*, double *delta_s*, const Matrix * *J_c*, const Vector * *D_c*, double *delta_c*, const Matrix * *J_d*, const Vector * *D_d*, double *delta_d*, const Vector & *rhs_x*, const Vector & *rhs_s*, const Vector & *rhs_c*, const Vector & *rhs_d*, Vector & *sol_x*, Vector & *sol_s*, Vector & *sol_c*, Vector & *sol_d*, bool *check_NegEVals*, Index *numberOfNegEVals*) [inline], [virtual]

Set up the augmented system and solve it for a given right hand side.

If desired (i.e. if *check_NegEVals* is true), then the solution is only computed if the number of negative eigenvalues matches *numberOfNegEVals*.

The return value is the return value of the linear solver object.

Reimplemented in [Ipopt::AugRestoSystemSolver](#), [Ipopt::LowRankSSAugSystemSolver](#), and [Ipopt::LowRankAugSystemSolver](#).

Definition at line 61 of file IpAugSystemSolver.hpp.

```
3.9.3.2 virtual ESymSolverStatus Ipopt::AugSystemSolver::MultiSolve ( const SymMatrix * W, double W_factor, const Vector *
D_x, double delta_x, const Vector * D_s, double delta_s, const Matrix * J_c, const Vector * D_c, double delta_c, const
Matrix * J_d, const Vector * D_d, double delta_d, std::vector< SmartPtr< const Vector > > & rhs_xV, std::vector<
SmartPtr< const Vector > > & rhs_sV, std::vector< SmartPtr< const Vector > > & rhs_cV, std::vector<
SmartPtr< const Vector > > & rhs_dV, std::vector< SmartPtr< Vector > > & sol_xV, std::vector< SmartPtr<
Vector > > & sol_sV, std::vector< SmartPtr< Vector > > & sol_cV, std::vector< SmartPtr< Vector > > &
sol_dV, bool check_NegEVals, Index numberOfNegEVals ) [inline],[virtual]
```

Like Solve, but for multiple right hand sides.

The inheriting class has to be overload at least one of Solve and MultiSolve.

Reimplemented in [Ipopt::StdAugSystemSolver](#), and [Ipopt::GenAugSystemSolver](#).

Definition at line 110 of file IpAugSystemSolver.hpp.

```
3.9.3.3 virtual Index Ipopt::AugSystemSolver::NumberOfNegEVals ( ) const [pure virtual]
```

Number of negative eigenvalues detected during last solve.

Returns the number of negative eigenvalues of the most recent factorized matrix. This must not be called if the linear solver does not compute this quantities (see ProvidesInertia).

Implemented in [Ipopt::LowRankSSAugSystemSolver](#), [Ipopt::AugRestoSystemSolver](#), [Ipopt::StdAugSystemSolver](#), [Ipopt::LowRankAugSystemSolver](#), and [Ipopt::GenAugSystemSolver](#).

```
3.9.3.4 virtual bool Ipopt::AugSystemSolver::ProvidesInertia ( ) const [pure virtual]
```

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implemented in [Ipopt::AugRestoSystemSolver](#), [Ipopt::LowRankSSAugSystemSolver](#), [Ipopt::StdAugSystemSolver](#), [Ipopt::LowRankAugSystemSolver](#), and [Ipopt::GenAugSystemSolver](#).

```
3.9.3.5 virtual bool Ipopt::AugSystemSolver::IncreaseQuality ( ) [pure virtual]
```

Request to increase quality of solution for next solve.

Ask underlying linear solver to increase quality of solution for the next solve (e.g. increase pivot tolerance). Returns false, if this is not possible (e.g. maximal pivot tolerance already used.)

Implemented in [Ipopt::AugRestoSystemSolver](#), [Ipopt::LowRankSSAugSystemSolver](#), [Ipopt::StdAugSystemSolver](#), [Ipopt::LowRankAugSystemSolver](#), and [Ipopt::GenAugSystemSolver](#).

The documentation for this class was generated from the following file:


- IpAugSystemSolver.hpp

3.10 Ipopt::BacktrackingLineSearch Class Reference

General implementation of a backtracking line search.

```
#include <IpBacktrackingLineSearch.hpp>
```

Inheritance diagram for Ipopt::BacktrackingLineSearch:

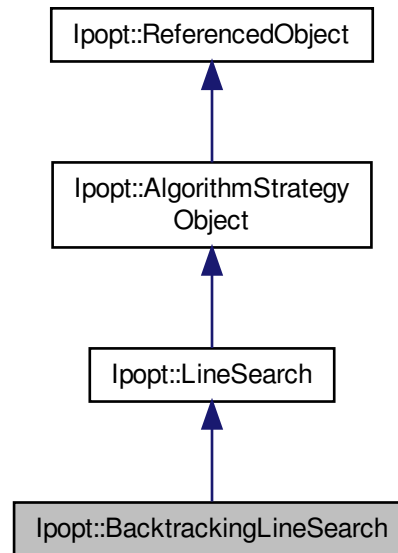

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
InitializeImpl - overloaded from [AlgorithmStrategyObject](#).
- virtual void [FindAcceptableTrialPoint](#) ()
Perform the line search.
- virtual void [Reset](#) ()
Reset the line search.
- virtual void [SetRigorousLineSearch](#) (bool rigorous)
Set flag indicating whether a very rigorous line search should be performed.
- virtual bool [CheckSkippedLineSearch](#) ()
Check if the line search procedure didn't accept a new iterate during the last call of [FindAcceptableTrialPoint\(\)](#).
- virtual bool [ActivateFallbackMechanism](#) ()
Activate fallback mechanism.

Constructors/Destructors

- [BacktrackingLineSearch](#) (const [SmartPtr](#)< [BacktrackingLSAcceptor](#) > &acceptor, const [SmartPtr](#)< [RestorationPhase](#) > &resto_phase, const [SmartPtr](#)< [ConvergenceCheck](#) > &conv_check)
Constructor.
- virtual [~BacktrackingLineSearch](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)
Methods for [OptionsList](#).

Additional Inherited Members

3.10.1 Detailed Description

General implementation of a backtracking line search.

This class can be used to perform the filter line search procedure or other procedures. The [BacktrackingLSAcceptor](#) is used to determine whether trial points are acceptable (e.g., based on a filter or other methods).

This backtracking line search knows of a restoration phase (which is called when the trial step size becomes too small or no search direction could be computed). It also has the notion of a "soft restoration phase," which uses the regular steps but decides on the acceptability based on other measures than the regular ones (e.g., reduction of the PD error instead of acceptability to a filter mechanism).

Definition at line 36 of file IpBacktrackingLineSearch.hpp.

3.10.2 Constructor & Destructor Documentation

- 3.10.2.1 `Ipopt::BacktrackingLineSearch::BacktrackingLineSearch ( const SmartPtr< BacktrackingLSAcceptor > & acceptor, const SmartPtr< RestorationPhase > & resto_phase, const SmartPtr< ConvergenceCheck > & conv_check )`

Constructor.

The acceptor implements the acceptance test for the line search. The [ConvergenceCheck](#) object is used to determine whether the current iterate is acceptable (for example, the restoration phase is not started if the acceptability level has been reached). If `conv_check` is NULL, we assume that the current iterate is not acceptable (in the sense of the `acceptable_tol` option).

3.10.3 Member Function Documentation

- 3.10.3.1 `virtual void Ipopt::BacktrackingLineSearch::FindAcceptableTrialPoint ( ) [virtual]`

Perform the line search.

It is assumed that the search direction is computed in the data object.

Implements [Ipopt::LineSearch](#).

- 3.10.3.2 `virtual void Ipopt::BacktrackingLineSearch::Reset ( ) [virtual]`

Reset the line search.

This function should be called if all previous information should be discarded when the line search is performed the next time. For example, this method should be called if the barrier parameter is changed.

Implements [Ipopt::LineSearch](#).

- 3.10.3.3 `virtual void Ipopt::BacktrackingLineSearch::SetRigorousLineSearch ( bool rigorous ) [inline], [virtual]`

Set flag indicating whether a very rigorous line search should be performed.

If this flag is set to true, the line search algorithm might decide to abort the line search and not to accept a new iterate. If the line search decided not to accept a new iterate, the return value of [CheckSkippedLineSearch\(\)](#) is true at the next call. For example, in the non-monotone barrier parameter update procedure, the filter algorithm should not switch to the restoration phase in the free mode; instead, the algorithm should switch to the fixed mode.

Implements [Ipopt::LineSearch](#).

Definition at line 85 of file IpBacktrackingLineSearch.hpp.

3.10.3.4 `virtual bool Ipopt::BacktrackingLineSearch::ActivateFallbackMechanism ( ) [virtual]`

Activate fallback mechanism.

Return false, if that is not possible.

Implements [Ipopt::LineSearch](#).

The documentation for this class was generated from the following file:


- IpBacktrackingLineSearch.hpp

3.11 Ipopt::BacktrackingLSAcceptor Class Reference

Base class for backtracking line search acceptors.

```
#include <IpBacktrackingLSAcceptor.hpp>
```

Inheritance diagram for Ipopt::BacktrackingLSAcceptor:

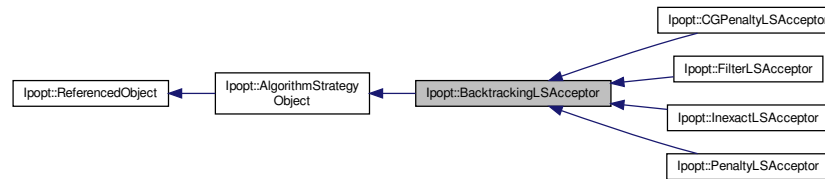

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
InitializeImpl - overloaded from [AlgorithmStrategyObject](#).
- virtual void [Reset](#) ()=0
Reset the acceptor.
- virtual void [InitThisLineSearch](#) (bool in_watchdog)=0
Initialization for the next line search.
- virtual void [PrepareRestoPhaseStart](#) ()=0
Method that is called before the restoration phase is called.
- virtual Number [CalculateAlphaMin](#) ()=0
Method returning the lower bound on the trial step sizes.
- virtual bool [CheckAcceptabilityOfTrialPoint](#) (Number alpha_primal)=0
Method for checking if current trial point is acceptable.

- virtual bool [TrySecondOrderCorrection](#) (Number alpha_primal_test, Number &alpha_primal, [SmartPtr< IteratesVector >](#) &actual_delta)=0
Try a second order correction for the constraints.
- virtual bool [TryCorrector](#) (Number alpha_primal_test, Number &alpha_primal, [SmartPtr< IteratesVector >](#) &actual_delta)=0
Try higher order corrector (for fast local convergence).
- virtual char [UpdateForNextIteration](#) (Number alpha_primal_test)=0
Method for ending the current line search.
- virtual void [StartWatchDog](#) ()=0
Method for setting internal data if the watchdog procedure is started.
- virtual void [StopWatchDog](#) ()=0
Method for setting internal data if the watchdog procedure is stopped.
- virtual bool [RestoredIterate](#) ()
Method for telling the [BacktrackingLineSearch](#) object that a previous iterate has been restored.
- virtual bool [NeverRestorationPhase](#) ()
Method called by [BacktrackingLineSearch](#) object to determine whether the restoration phase should never be called.
- virtual bool [DoFallback](#) ()
Method for doing a fallback approach in case no search direction could be computed.
- virtual Number [ComputeAlphaForY](#) (Number alpha_primal, Number alpha_dual, [SmartPtr< IteratesVector >](#) &delta)
Method for computing the step for the constraint multipliers in the line search acceptor method.
- virtual bool [HasComputeAlphaForY](#) () const
Method returning true of [ComputeAlphaForY](#) is implemented for this acceptor.

Constructors/Destructors

- [BacktrackingLSAcceptor](#) ()
Constructor.
- virtual [~BacktrackingLSAcceptor](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr< RegisteredOptions >](#) roptions)
Methods for [OptionsList](#).

Additional Inherited Members

3.11.1 Detailed Description

Base class for backtracking line search acceptors.

Definition at line 21 of file IpBacktrackingLSAcceptor.hpp.

3.11.2 Constructor & Destructor Documentation

3.11.2.1 Ipopt::BacktrackingLSAcceptor::BacktrackingLSAcceptor () [inline]

Constructor.

Definition at line 27 of file IpBacktrackingLSAcceptor.hpp.

3.11.3 Member Function Documentation

3.11.3.1 virtual void Ipopt::BacktrackingLSAcceptor::Reset () [pure virtual]

Reset the acceptor.

This function should be called if all previous information should be discarded when the line search is performed the next time. For example, this method should be called if the barrier parameter is changed.

Implemented in [Ipopt::FilterLSAcceptor](#), [Ipopt::PenaltyLSAcceptor](#), [Ipopt::CGPenaltyLSAcceptor](#), and [Ipopt::InexactLSAcceptor](#).

3.11.3.2 virtual void Ipopt::BacktrackingLSAcceptor::InitThisLineSearch (bool *in_watchdog*) [pure virtual]

Initialization for the next line search.

The flag *in_watchdog* indicates if we are currently in an active watchdog procedure.

Implemented in [Ipopt::FilterLSAcceptor](#), [Ipopt::PenaltyLSAcceptor](#), [Ipopt::CGPenaltyLSAcceptor](#), and [Ipopt::InexactLSAcceptor](#).

3.11.3.3 virtual void Ipopt::BacktrackingLSAcceptor::PrepareRestoPhaseStart () [pure virtual]

Method that is called before the restoration phase is called.

Here, we can set up things that are required in the termination test for the restoration phase, such as augmenting a filter.

Implemented in [Ipopt::FilterLSAcceptor](#), [Ipopt::PenaltyLSAcceptor](#), [Ipopt::CGPenaltyLSAcceptor](#), and [Ipopt::InexactLSAcceptor](#).

3.11.3.4 virtual Number Ipopt::BacktrackingLSAcceptor::CalculateAlphaMin () [pure virtual]

Method returning the lower bound on the trial step sizes.

If the backtracking procedure encounters a trial step size below this value after the first trial set, it switches to the (soft) restoration phase.

Implemented in [Ipopt::CGPenaltyLSAcceptor](#), [Ipopt::FilterLSAcceptor](#), [Ipopt::PenaltyLSAcceptor](#), and [Ipopt::InexactLSAcceptor](#).

3.11.3.5 virtual bool Ipopt::BacktrackingLSAcceptor::CheckAcceptabilityOfTrialPoint (Number *alpha_primal*) [pure virtual]

Method for checking if current trial point is acceptable.

It is assumed that the delta information in *ip_data* is the search direction used in criteria. The primal trial point has to be set before the call. *alpha_primal* is the step size which is to be used for the test; if it is zero, then this method is called during the soft restoration phase.

Implemented in [Ipopt::CGPenaltyLSAcceptor](#), [Ipopt::FilterLSAcceptor](#), [Ipopt::PenaltyLSAcceptor](#), and [Ipopt::InexactLSAcceptor](#).

3.11.3.6 virtual bool Ipopt::BacktrackingLSAcceptor::TrySecondOrderCorrection (Number *alpha_primal_test*, Number & *alpha_primal*, SmartPtr< IteratesVector > & *actual_delta*) [pure virtual]

Try a second order correction for the constraints.

If the first trial step (with incoming *alpha_primal*) has been reject, this tries second order corrections, e.g., for the constraints. Here, *alpha_primal_test* is the step size that has to be used in the filter acceptance tests. On output *actual_delta* has been set to the step including the second order correction if it has been accepted, otherwise it is unchanged. If the SOC step has been accepted, *alpha_primal* has the fraction-to-the-boundary value for the SOC step on output.

The return value is true, if a SOC step has been accepted.

Implemented in [Ipopt::CGPenaltyLSAcceptor](#), [Ipopt::FilterLSAcceptor](#), [Ipopt::PenaltyLSAcceptor](#), and [Ipopt::InexactLSAcceptor](#).

3.11.3.7 `virtual bool Ipopt::BacktrackingLSAcceptor::TryCorrector ( Number alpha_primal_test, Number & alpha_primal, SmartPtr< IteratesVector > & actual_delta ) [pure virtual]`

Try higher order corrector (for fast local convergence).

In contrast to a second order correction step, which tries to make an unacceptable point acceptable by improving constraint violation, this corrector step is tried even if the regular primal-dual step is acceptable.

Implemented in [Ipopt::CGPenaltyLSAcceptor](#), [Ipopt::FilterLSAcceptor](#), [Ipopt::PenaltyLSAcceptor](#), and [Ipopt::InexactLSAcceptor](#).

3.11.3.8 `virtual char Ipopt::BacktrackingLSAcceptor::UpdateForNextIteration ( Number alpha_primal_test ) [pure virtual]`

Method for ending the current line search.

When it is called, the internal data should be updates, e.g., the filter might be augmented. *alpha_primal_test* is the value of alpha that has been used for in the acceptance test earlier. Return value is a character for the *info_alpha_primal_char* field in *IpData*.

Implemented in [Ipopt::CGPenaltyLSAcceptor](#), [Ipopt::FilterLSAcceptor](#), [Ipopt::PenaltyLSAcceptor](#), and [Ipopt::InexactLSAcceptor](#).

3.11.3.9 `virtual void Ipopt::BacktrackingLSAcceptor::StartWatchDog ( ) [pure virtual]`

Method for setting internal data if the watchdog procedure is started.

Implemented in [Ipopt::CGPenaltyLSAcceptor](#), [Ipopt::FilterLSAcceptor](#), [Ipopt::PenaltyLSAcceptor](#), and [Ipopt::InexactLSAcceptor](#).

3.11.3.10 `virtual void Ipopt::BacktrackingLSAcceptor::StopWatchDog ( ) [pure virtual]`

Method for setting internal data if the watchdog procedure is stopped.

Implemented in [Ipopt::CGPenaltyLSAcceptor](#), [Ipopt::FilterLSAcceptor](#), [Ipopt::PenaltyLSAcceptor](#), and [Ipopt::InexactLSAcceptor](#).

3.11.3.11 `virtual bool Ipopt::BacktrackingLSAcceptor::RestoredIterate ( ) [inline],[virtual]`

Method for telling the [BacktrackingLineSearch](#) object that a previous iterate has been restored.

Reimplemented in [Ipopt::CGPenaltyLSAcceptor](#).

Definition at line 115 of file *IpBacktrackingLSAcceptor.hpp*.

3.11.3.12 `virtual bool Ipopt::BacktrackingLSAcceptor::NeverRestorationPhase ( ) [inline],[virtual]`

Method called by [BacktrackingLineSearch](#) object to determine whether the restoration phase should never be called.

Reimplemented in [Ipopt::CGPenaltyLSAcceptor](#).

Definition at line 122 of file *IpBacktrackingLSAcceptor.hpp*.

3.11.3.13 `virtual bool Ipopt::BacktrackingLSAcceptor::DoFallback ( ) [inline],[virtual]`

Method for doing a fallback approach in case no search direction could be computed.

If no such fall back option is available, return false. If possible, the new point is assumed to be in the trial fields of *IpData*

now.

Reimplemented in [Ipopt::CGPenaltyLSAccepter](#).

Definition at line 131 of file IpBacktrackingLSAccepter.hpp.

3.11.3.14 virtual Number Ipopt::BacktrackingLSAccepter::ComputeAlphaForY (Number *alpha_primal*, Number *alpha_dual*, SmartPtr< IteratesVector > & *delta*) [inline],[virtual]

Method for computing the step for the constraint multipliers in the line search acceptor method.

This is activated with choosing the option alpha_for_y=acceptor

Reimplemented in [Ipopt::InexactLSAccepter](#).

Definition at line 139 of file IpBacktrackingLSAccepter.hpp.

The documentation for this class was generated from the following file:


- IpBacktrackingLSAccepter.hpp

3.12 Ipopt::CachedResults< T > Class Template Reference

Cache Priority Enum.

```
#include <IpCachedResults.hpp>
```

Inheritance diagram for Ipopt::CachedResults< T >:

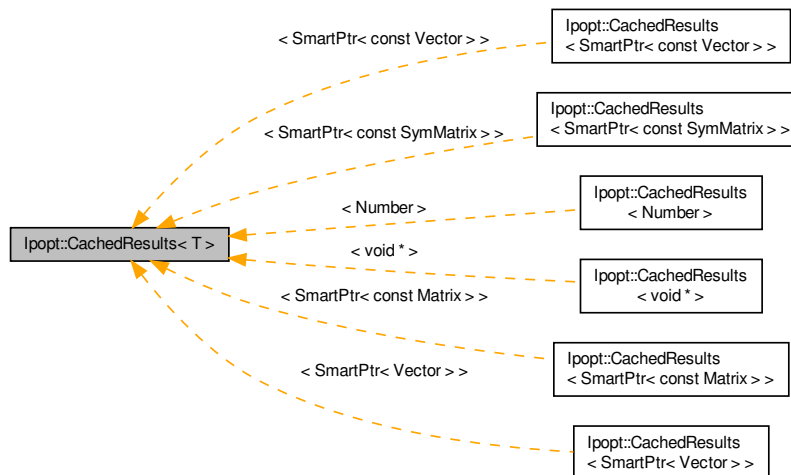

Public Member Functions

- bool [InvalidateResult](#) (const std::vector< const [TaggedObject](#) * > &dependencies, const std::vector< Number > &scalar_dependencies)
Invalidates the result for given dependencies.
- void [Clear](#) ()
Invalidates all cached results.

- void **Clear** (Int max_cache_size)
Invalidate all cached results and changes max_cache_size.

Constructors and Destructors.

- **CachedResults** (Int max_cache_size)
Constructor, where max_cache_size is the maximal number of results that should be cached.
- virtual **~CachedResults** ()
Destructor.

Generic methods for adding and retrieving cached results.

- void **AddCachedResult** (const T &result, const std::vector< const **TaggedObject** * > &dependents, const std::vector< Number > &scalar_dependents)
Generic method for adding a result to the cache, given a std::vector of TaggedObjects and a std::vector of Numbers.
- bool **GetCachedResult** (T &retResult, const std::vector< const **TaggedObject** * > &dependents, const std::vector< Number > &scalar_dependents) const
Generic method for retrieving a cached results, given the dependencies as a std::vector of TaggedObjects and a std::vector of Numbers.
- void **AddCachedResult** (const T &result, const std::vector< const **TaggedObject** * > &dependents)
Method for adding a result, providing only a std::vector of TaggedObjects.
- bool **GetCachedResult** (T &retResult, const std::vector< const **TaggedObject** * > &dependents) const
Method for retrieving a cached result, providing only a std::vector of TaggedObjects.

Pointer-based methods for adding and retrieving cached

results, providing dependencies explicitly.

- void **AddCachedResult1Dep** (const T &result, const **TaggedObject** *dependent1)
Method for adding a result to the cache, proving one dependency as a TaggedObject explicitly.
- bool **GetCachedResult1Dep** (T &retResult, const **TaggedObject** *dependent1)
Method for retrieving a cached result, proving one dependency as a TaggedObject explicitly.
- void **AddCachedResult2Dep** (const T &result, const **TaggedObject** *dependent1, const **TaggedObject** *dependent2)
Method for adding a result to the cache, proving two dependencies as a TaggedObject explicitly.
- bool **GetCachedResult2Dep** (T &retResult, const **TaggedObject** *dependent1, const **TaggedObject** *dependent2)
Method for retrieving a cached result, proving two dependencies as a TaggedObject explicitly.
- void **AddCachedResult3Dep** (const T &result, const **TaggedObject** *dependent1, const **TaggedObject** *dependent2, const **TaggedObject** *dependent3)
Method for adding a result to the cache, proving three dependencies as a TaggedObject explicitly.
- bool **GetCachedResult3Dep** (T &retResult, const **TaggedObject** *dependent1, const **TaggedObject** *dependent2, const **TaggedObject** *dependent3)
Method for retrieving a cached result, proving three dependencies as a TaggedObject explicitly.

Pointer-free version of the Add and Get methods

- bool **GetCachedResult1Dep** (T &retResult, const **TaggedObject** &dependent1)
- bool **GetCachedResult2Dep** (T &retResult, const **TaggedObject** &dependent1, const **TaggedObject** &dependent2)
- bool **GetCachedResult3Dep** (T &retResult, const **TaggedObject** &dependent1, const **TaggedObject** &dependent2, const **TaggedObject** &dependent3)
- void **AddCachedResult1Dep** (const T &result, const **TaggedObject** &dependent1)
- void **AddCachedResult2Dep** (const T &result, const **TaggedObject** &dependent1, const **TaggedObject** &dependent2)
- void **AddCachedResult3Dep** (const T &result, const **TaggedObject** &dependent1, const **TaggedObject** &dependent2, const **TaggedObject** &dependent3)

3.12.1 Detailed Description

```
template<class T>class Ipopt::CachedResults< T >
```

Cache Priority Enum.

Templated class for Cached Results. This class stores up to a given number of "results", entities that are stored here together with identifiers, that can be used to later retrieve the information again.

Typically, T is a [SmartPtr](#) for some calculated quantity that should be stored (such as a [Vector](#)). The identifiers (or dependencies) are a (possibly varying) number of Tags from TaggedObjects, and a number of Numbers. Results are added to the cache using the AddCachedResults methods, and the can be retrieved with the GetCachedResults methods. The second set of methods checks whether a result has been cached for the given identifiers. If a corresponding result is found, a copy of it is returned and the method evaluates to true, otherwise it evaluates to false.

Note that cached results can become "stale", namely when a [TaggedObject](#) that is used to identify this CachedResult is changed. When this happens, the cached result can never be asked for again, so that there is no point in storing it any longer. For this purpose, a cached result, which is stored as a [DependentResult](#), inherits off an [Observer](#). This [Observer](#) retrieves notification whenever a [TaggedObject](#) dependency has changed. Stale results are later removed from the cache.

Definition at line 70 of file IpCachedResults.hpp.

3.12.2 Constructor & Destructor Documentation

```
3.12.2.1 template<class T > Ipopt::CachedResults< T >::CachedResults ( Int max_cache_size )
```

Constructor, where max_cache_size is the maximal number of results that should be cached.

If max_cache_size is negative, we allow an infinite amount of cache.

Definition at line 476 of file IpCachedResults.hpp.

3.12.3 Member Function Documentation

```
3.12.3.1 template<class T > bool Ipopt::CachedResults< T >::InvalidateResult ( const std::vector< const TaggedObject *
    > & dependents, const std::vector< Number > & scalar_dependents )
```

Invalidates the result for given dependencies.

Sets the stale flag for the corresponding cached result to true if it is found. Returns true, if the result was found.

Definition at line 685 of file IpCachedResults.hpp.

The documentation for this class was generated from the following file:


- IpCachedResults.hpp

3.13 Ipopt::CGPenaltyCq Class Reference

Class for all Chen-Goldfarb penalty method specific calculated quantities.

```
#include <IpCGPenaltyCq.hpp>
```

Inheritance diagram for Ipopt::CGPenaltyCq:

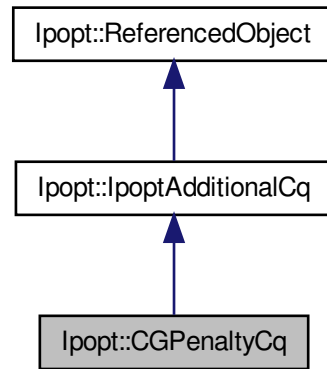

Public Member Functions

- bool [Initialize](#) (const [Journalist](#) &jnlst, const [OptionsList](#) &options, const std::string &prefix)
This method must be called to initialize the global algorithmic parameters.

Constructors/Destructors

- [CGPenaltyCq](#) ([IpoptNLP](#) *ip_nlp, [IpoptData](#) *ip_data, [IpoptCalculatedQuantities](#) *ip_cg)
Constructor.
- virtual [~CGPenaltyCq](#) ()
Default destructor.

Methods for the Chen-Goldfarb line search

- Number [curr_jac_cd_norm](#) (Index nrm_type)
Compute $\|\delta_c, \delta_d\|_{\infty}$.
- Number [curr_scaled_y_Amax](#) ()
Compute gradient scaling based $y \rightarrow Amax$.
- Number [curr_added_y_nrm2](#) ()
Compute the 2-norm of y plus δy .
- Number [curr_penalty_function](#) ()
Method for the penalty function at current point.
- Number [trial_penalty_function](#) ()
Method for the penalty function at trial point.
- Number [curr_direct_deriv_penalty_function](#) ()
Method for the directional derivative of the penalty function at current point with current step in δ .
- Number [curr_fast_direct_deriv_penalty_function](#) ()
Method for the directional derivative of the penalty function at current point with current "fast" step in δ_{cgp} .
- Number [dT_times_barH_times_d](#) ()
Quality of $d^T A(H) d$.

- Number [curr_cg_pert_fact](#) ()
Method for the current value for the perturbation factor for the Chen-Goldfarb method.
- Number [compute_curr_cg_penalty](#) (const Number)
Method for choose line search penalty parameter.
- Number [compute_curr_cg_penalty_scale](#) ()
Method for choose penalty parameters for scaling the KKT system.

Static Public Member Functions

- static void [RegisterOptions](#) (const [SmartPtr](#)< [RegisteredOptions](#) > &options)
Methods for IpoptType.

3.13.1 Detailed Description

Class for all Chen-Goldfarb penalty method specific calculated quantities.

Definition at line 22 of file IpCGPenaltyCq.hpp.

3.13.2 Member Function Documentation

3.13.2.1 `bool Ipopt::CGPenaltyCq::Initialize ( const Journalist & jnlst, const OptionsList & options, const std::string & prefix )`
[virtual]

This method must be called to initialize the global algorithmic parameters.

The parameters are taken from the [OptionsList](#) object.

Implements [Ipopt::IpoptAdditionalCq](#).

3.13.2.2 `Number Ipopt::CGPenaltyCq::curr_cg_pert_fact ( )`

Method for the current value for the perturbation factor for the Chen-Goldfarb method.

The factor is computed as 2-norm of the constraints divided by the current penalty parameter

The documentation for this class was generated from the following file:


- IpCGPenaltyCq.hpp

3.14 Ipopt::CGPenaltyData Class Reference

Class to organize all the additional data required by the Chen-Goldfarb penalty function algorithm.

```
#include <IpCGPenaltyData.hpp>
```

Inheritance diagram for Ipopt::CGPenaltyData:

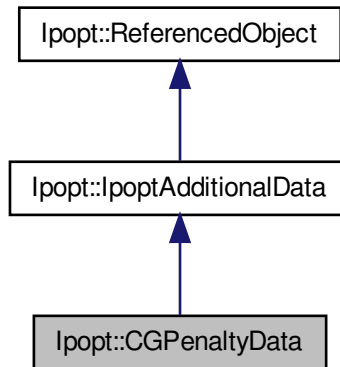

Public Member Functions

- bool [Initialize](#) (const [Journalist](#) &jnlst, const [OptionsList](#) &options, const std::string &prefix)
This method must be called to initialize the global algorithmic parameters.
- bool [InitializeDataStructures](#) ()
Initialize Data Structures.
- [SmartPtr](#)< const [IteratesVector](#) > [delta_cgpen](#) () const
Delta for the Chen-Goldfarb search direction.
- void [set_delta_cgpen](#) ([SmartPtr](#)< [IteratesVector](#) > &delta_pen)
Set the delta_cgpen - like the trial point, this method copies the pointer for efficiency (no copy and to keep cache tags the same) so after you call set, you cannot modify the data.
- void [set_delta_cgpen](#) ([SmartPtr](#)< const [IteratesVector](#) > &delta_pen)
Set the delta_cgpen - like the trial point, this method copies the pointer for efficiency (no copy and to keep cache tags the same) so after you call set, you cannot modify the data.
- [SmartPtr](#)< const [IteratesVector](#) > [delta_cgfast](#) () const
Delta for the fast Chen-Goldfarb search direction.
- void [set_delta_cgfast](#) ([SmartPtr](#)< [IteratesVector](#) > &delta_fast)
Set the delta_cgpen - like the trial point, this method copies the pointer for efficiency (no copy and to keep cache tags the same) so after you call set, you cannot modify the data.

Constructors/Destructors

- [CGPenaltyData](#) ()
Constructor.
- [~CGPenaltyData](#) ()
Default destructor.

Chen-Goldfarb step2. Those fields can be used to store
directions related to the Chen-Goldfarb algorithm

- bool **HaveCgPenDeltas** () const
- void **SetHaveCgPenDeltas** (bool have_cgpen_deltas)
- bool **HaveCgFastDeltas** () const
- void **SetHaveCgFastDeltas** (bool have_cgfast_deltas)

Public Methods for updating iterates

- void [AcceptTrialPoint](#) ()
Set the current iterate values from the trial values.

3.14.1 Detailed Description

Class to organize all the additional data required by the Chen-Goldfarb penalty function algorithm.

Definition at line 22 of file IpCGPenaltyData.hpp.

3.14.2 Member Function Documentation

3.14.2.1 `bool Ipopt::CGPenaltyData::Initialize ( const Journalist & jnlst, const OptionsList & options, const std::string & prefix ) [virtual]`

This method must be called to initialize the global algorithmic parameters.

The parameters are taken from the [OptionsList](#) object.

Implements [Ipopt::IpoptAdditionalData](#).

3.14.2.2 `void Ipopt::CGPenaltyData::set_delta_cgpen ( SmartPtr< const IteratesVector > & delta_pen ) [inline]`

Set the delta_cgpen - like the trial point, this method copies the pointer for efficiency (no copy and to keep cache tags the same) so after you call set, you cannot modify the data.

This is the version that is happy with a pointer to const [IteratesVector](#).

Definition at line 299 of file IpCGPenaltyData.hpp.

3.14.2.3 `void Ipopt::CGPenaltyData::AcceptTrialPoint ( ) [virtual]`

Set the current iterate values from the trial values.

Implements [Ipopt::IpoptAdditionalData](#).

The documentation for this class was generated from the following file:


- IpCGPenaltyData.hpp

3.15 Ipopt::CGPenaltyLSAcceptor Class Reference

Line search acceptor, based on the Chen-Goldfarb penalty function approach.

```
#include <IpCGPenaltyLSAcceptor.hpp>
```

Inheritance diagram for Ipopt::CGPenaltyLSAcceptor:

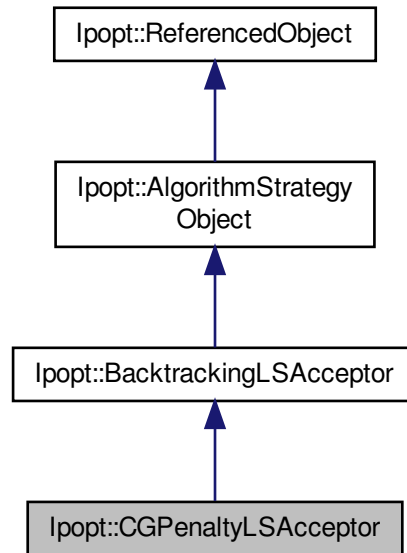

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
InitializeImpl - overloaded from [AlgorithmStrategyObject](#).
- virtual void [Reset](#) ()
Reset the acceptor.
- virtual void [InitThisLineSearch](#) (bool in_watchdog)
Initialization for the next line search.
- virtual void [PrepareRestoPhaseStart](#) ()
Method that is called before the restoration phase is called.
- virtual Number [CalculateAlphaMin](#) ()
Method returning the lower bound on the trial step sizes.
- virtual bool [CheckAcceptabilityOfTrialPoint](#) (Number alpha_primal)
Method for checking if current trial point is acceptable.
- virtual bool [TrySecondOrderCorrection](#) (Number alpha_primal_test, Number &alpha_primal, [SmartPtr](#)< [IteratesVector](#) > &actual_delta)
Try a second order correction for the constraints.
- virtual bool [TryCorrector](#) (Number alpha_primal_test, Number &alpha_primal, [SmartPtr](#)< [IteratesVector](#) > &actual_delta)
Try higher order corrector (for fast local convergence).
- virtual char [UpdateForNextIteration](#) (Number alpha_primal_test)
Method for ending the current line search.
- virtual void [StartWatchDog](#) ()

Method for setting internal data if the watchdog procedure is started.

- virtual void [StopWatchDog](#) ()

Method for setting internal data if the watchdog procedure is stopped.

- virtual bool [RestoredIterate](#) ()

Method for telling the [BacktrackingLineSearch](#) object that a previous iterate has been restored.

- virtual bool [NeverRestorationPhase](#) ()

Method for telling the [BacktrackingLineSearch](#) object that the restoration is not needed.

- virtual bool [DoFallback](#) ()

Method for doing a fallback approach in case no search direction could be computed.

Constructors/Destructors

- [CGPenaltyLSAcceptor](#) (const [SmartPtr](#)< [PDSystemSolver](#) > &pd_solver)

Constructor.

- virtual [~CGPenaltyLSAcceptor](#) ()

Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)

Methods for [OptionsList](#).

Additional Inherited Members

3.15.1 Detailed Description

Line search acceptor, based on the Chen-Goldfarb penalty function approach.

Definition at line 23 of file IpCGPenaltyLSAcceptor.hpp.

3.15.2 Constructor & Destructor Documentation

3.15.2.1 Ipopt::CGPenaltyLSAcceptor::CGPenaltyLSAcceptor (const [SmartPtr](#)< [PDSystemSolver](#) > &pd_solver)

Constructor.

The [PDSystemSolver](#) object only needs to be provided (i.e. not NULL) if second order correction or corrector steps are to be used.

3.15.3 Member Function Documentation

3.15.3.1 virtual void Ipopt::CGPenaltyLSAcceptor::Reset () [virtual]

Reset the acceptor.

This function should be called if all previous information should be discarded when the line search is performed the next time. For example, this method should be called if the barrier parameter is changed.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.15.3.2 virtual void Ipopt::CGPenaltyLSAcceptor::InitThisLineSearch (bool *in_watchdog*) [virtual]

Initialization for the next line search.

The flag *in_watchdog* indicates if we are currently in an active watchdog procedure.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.15.3.3 virtual void Ipopt::CGPenaltyLSAcceptor::PrepareRestoPhaseStart () [virtual]

Method that is called before the restoration phase is called.

Here, we can set up things that are required in the termination test for the restoration phase.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.15.3.4 virtual Number Ipopt::CGPenaltyLSAcceptor::CalculateAlphaMin () [virtual]

Method returning the lower bound on the trial step sizes.

If the backtracking procedure encounters a trial step size below this value after the first trial set, it switches to the (soft) restoration phase.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.15.3.5 virtual bool Ipopt::CGPenaltyLSAcceptor::CheckAcceptabilityOfTrialPoint (Number *alpha_primal*) [virtual]

Method for checking if current trial point is acceptable.

It is assumed that the delta information in *ip_data* is the search direction used in criteria. The primal trial point has to be set before the call.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.15.3.6 virtual bool Ipopt::CGPenaltyLSAcceptor::TrySecondOrderCorrection (Number *alpha_primal_test*, Number & *alpha_primal*, SmartPtr< IteratesVector > & *actual_delta*) [virtual]

Try a second order correction for the constraints.

If the first trial step (with incoming *alpha_primal*) has been reject, this tries up to *max_soc* second order corrections for the constraints. Here, *alpha_primal_test* is the step size that has to be used in the merit function acceptance tests. On output *actual_delta* has been set to the step including the second order correction if it has been accepted, otherwise it is unchanged. If the SOC step has been accepted, *alpha_primal* has the fraction-to-the-boundary value for the SOC step on output. The return value is true, if a SOC step has been accepted.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.15.3.7 virtual bool Ipopt::CGPenaltyLSAcceptor::TryCorrector (Number *alpha_primal_test*, Number & *alpha_primal*, SmartPtr< IteratesVector > & *actual_delta*) [virtual]

Try higher order corrector (for fast local convergence).

In contrast to a second order correction step, which tries to make an unacceptable point acceptable by improving constraint violation, this corrector step is tried even if the regular primal-dual step is acceptable.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.15.3.8 virtual char Ipopt::CGPenaltyLSAcceptor::UpdateForNextIteration (Number *alpha_primal_test*) [virtual]

Method for ending the current line search.

When it is called, the internal data should be updates, e.g., the penalty parameter might be updated. *alpha_primal_test* is the value of alpha that has been used for in the acceptance test earlier.

Implements [Ipopt::BacktrackingLSAccepter](#).

3.15.3.9 virtual void Ipopt::CGPenaltyLSAccepter::StartWatchDog () [virtual]

Method for setting internal data if the watchdog procedure is started.

Implements [Ipopt::BacktrackingLSAccepter](#).

3.15.3.10 virtual void Ipopt::CGPenaltyLSAccepter::StopWatchDog () [virtual]

Method for setting internal data if the watchdog procedure is stopped.

Implements [Ipopt::BacktrackingLSAccepter](#).

3.15.3.11 virtual bool Ipopt::CGPenaltyLSAccepter::RestoredIterate () [virtual]

Method for telling the [BacktrackingLineSearch](#) object that a previous iterate has been restored.

Reimplemented from [Ipopt::BacktrackingLSAccepter](#).

3.15.3.12 virtual bool Ipopt::CGPenaltyLSAccepter::DoFallback () [virtual]

Method for doing a fallback approach in case no search direction could be computed.

If no such fall back option is available, return false.

Reimplemented from [Ipopt::BacktrackingLSAccepter](#).

The documentation for this class was generated from the following file:


- IpCGPenaltyLSAccepter.hpp

3.16 Ipopt::CGPerturbationHandler Class Reference

Class for handling the perturbation factors delta_x, delta_s, delta_c, and delta_d in the primal dual system.

```
#include <IpCGPerturbationHandler.hpp>
```

Inheritance diagram for Ipopt::CGPerturbationHandler:

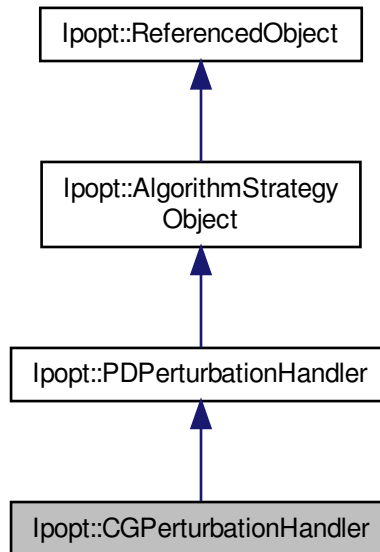

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
Implementation of the initialization method that has to be overloaded by for each derived class.
- bool [ConsiderNewSystem](#) (Number &delta_x, Number &delta_s, Number &delta_c, Number &delta_d)
This method must be called for each new matrix, and before any other method for generating perturbation factors.
- bool [PerturbForSingularity](#) (Number &delta_x, Number &delta_s, Number &delta_c, Number &delta_d)
This method returns pertubation factors for the case when the most recent factorization resulted in a singular matrix.
- bool [PerturbForWrongInertia](#) (Number &delta_x, Number &delta_s, Number &delta_c, Number &delta_d)
This method returns pertubation factors for the case when the most recent factorization resulted in a matrix with an incorrect number of negative eigenvalues.
- void [CurrentPerturbation](#) (Number &delta_x, Number &delta_s, Number &delta_c, Number &delta_d)
Just return the perturbation values that have been determined most recently.

Constructors/Destructors

- [CGPerturbationHandler](#) ()
Default Constructor.
- virtual [~CGPerturbationHandler](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members

3.16.1 Detailed Description

Class for handling the perturbation factors `delta_x`, `delta_s`, `delta_c`, and `delta_d` in the primal dual system.

This class is used by the [PDFullSpaceSolver](#) to handle the cases where the primal-dual system is singular or has the wrong inertia. The perturbation factors are obtained based on simple heuristics, taking into account the size of previous perturbations.

Definition at line 25 of file `IpCGPerturbationHandler.hpp`.

3.16.2 Member Function Documentation

3.16.2.1 `virtual bool Ipopt::CGPerturbationHandler::InitializeImpl ( const OptionsList & options, const std::string & prefix )`
[virtual]

Implementation of the initialization method that has to be overloaded by for each derived class.

Reimplemented from [Ipopt::PDPerturbationHandler](#).

3.16.2.2 `bool Ipopt::CGPerturbationHandler::ConsiderNewSystem ( Number & delta_x, Number & delta_s, Number & delta_c, Number & delta_d )` [virtual]

This method must be called for each new matrix, and before any other method for generating perturbation factors.

Usually, the returned perturbation factors are zero, but if the system is thought to be structurally singular, they might be positive. If the return value is false, no suitable perturbation could be found.

Reimplemented from [Ipopt::PDPerturbationHandler](#).

3.16.2.3 `bool Ipopt::CGPerturbationHandler::PerturbForSingularity ( Number & delta_x, Number & delta_s, Number & delta_c, Number & delta_d )` [virtual]

This method returns perturbation factors for the case when the most recent factorization resulted in a singular matrix.

If the return value is false, no suitable perturbation could be found.

Reimplemented from [Ipopt::PDPerturbationHandler](#).

3.16.2.4 `bool Ipopt::CGPerturbationHandler::PerturbForWrongInertia ( Number & delta_x, Number & delta_s, Number & delta_c, Number & delta_d )` [virtual]

This method returns perturbation factors for the case when the most recent factorization resulted in a matrix with an incorrect number of negative eigenvalues.

If the return value is false, no suitable perturbation could be found.

Reimplemented from [Ipopt::PDPerturbationHandler](#).

The documentation for this class was generated from the following file:


- `IpCGPerturbationHandler.hpp`

3.17 Ipopt::CGSearchDirCalculator Class Reference

Implementation of the search direction calculator that computes the Chen-Goldfarb step for the current barrier and penalty parameter.

```
#include <IpCGSearchDirCalc.hpp>
```

Inheritance diagram for Ipopt::CGSearchDirCalculator:

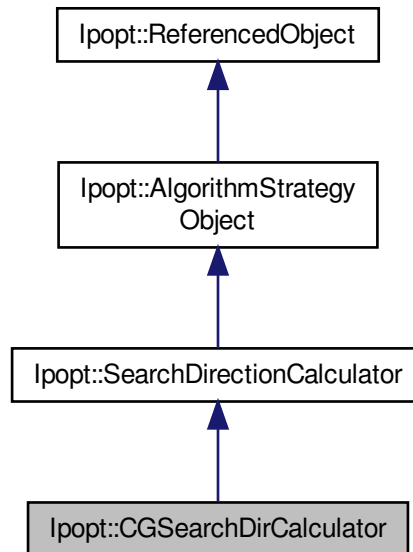

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [ComputeSearchDirection](#) ()
Method for computing the search direction.

Constructors/Destructors

- [CGSearchDirCalculator](#) (const [SmartPtr](#)< [PDSystemSolver](#) > &pd_solver)
Constructor.
- virtual [~CGSearchDirCalculator](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members

3.17.1 Detailed Description

Implementation of the search direction calculator that computes the Chen-Goldfarb step for the current barrier and penalty parameter.

Definition at line 25 of file IpCGSearchDirCalc.hpp.

3.17.2 Member Function Documentation

3.17.2.1 virtual bool Ipopt::CGSearchDirCalculator::ComputeSearchDirection () [virtual]

Method for computing the search direction.

If the penalty parameter has not yet been initialized, it is initialized now. The computed direction is stored in IpData().delta().

Implements [Ipopt::SearchDirectionCalculator](#).

The documentation for this class was generated from the following file:


- IpCGSearchDirCalc.hpp

3.18 Ipopt::CompoundMatrix Class Reference

Class for Matrices consisting of other matrices.

```
#include <IpCompoundMatrix.hpp>
```

Inheritance diagram for Ipopt::CompoundMatrix:

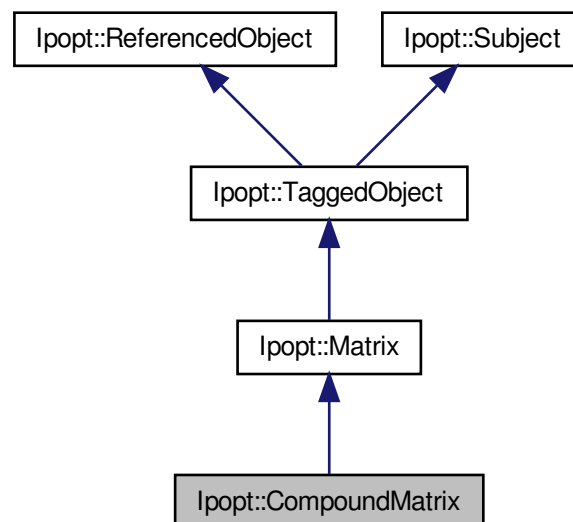

Public Member Functions

- void **SetComp** (Index irow, Index jcol, const **Matrix** &matrix)
Method for setting an individual component at position (irow, jcol) in the compound matrix.
- void **SetCompNonConst** (Index irow, Index jcol, **Matrix** &matrix)
*Method to set a non-const **Matrix** entry.*
- void **CreateBlockFromSpace** (Index irow, Index jcol)
Method to create a new matrix from the space for this block.
- **SmartPtr**< const **Matrix** > **GetComp** (Index irow, Index jcol) const
*Method for retrieving one block from the compound matrix as a const **Matrix**.*
- **SmartPtr**< **Matrix** > **GetCompNonConst** (Index irow, Index jcol)
*Method for retrieving one block from the compound matrix as a non-const **Matrix**.*
- Index **NComps_Rows** () const
Number of block rows of this compound matrix.
- Index **NComps_Cols** () const
Number of block columns of this compound matrix.

Constructors / Destructors

- **CompoundMatrix** (const **CompoundMatrixSpace** *owner_space)
Constructor, taking the owner_space.
- virtual **~CompoundMatrix** ()
Destructor.

Protected Member Functions

Methods overloaded from **Matrix**

- virtual void **MultVectorImpl** (Number alpha, const **Vector** &x, Number beta, **Vector** &y) const
Matrix-vector multiply.
- virtual void **TransMultVectorImpl** (Number alpha, const **Vector** &x, Number beta, **Vector** &y) const
Matrix(transpose) vector multiply.
- virtual void **AddMSInvZImpl** (Number alpha, const **Vector** &S, const **Vector** &Z, **Vector** &X) const
 $X = \text{beta} * X + \text{alpha} * (\text{Matrix } S^{-1} \{ -1 \} Z).$
- virtual void **SinvBlrmZMTdBrlImpl** (Number alpha, const **Vector** &S, const **Vector** &R, const **Vector** &Z, const **Vector** &D, **Vector** &X) const
 $X = S^{-1} \{ -1 \} (r + \text{alpha} * Z * M^{\wedge} Td).$
- virtual bool **HasValidNumbersImpl** () const
Method for determining if all stored numbers are valid (i.e., no Inf or Nan).
- virtual void **ComputeRowAMaxImpl** (**Vector** &rows_norms, bool init) const
Compute the max-norm of the rows in the matrix.
- virtual void **ComputeColAMaxImpl** (**Vector** &cols_norms, bool init) const
Compute the max-norm of the columns in the matrix.
- virtual void **PrintImpl** (const **Journalist** &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
Print detailed information about the matrix.

Additional Inherited Members

3.18.1 Detailed Description

Class for Matrices consisting of other matrices.

This matrix is a matrix that consists of zero, one or more Matrices's which are arranged like this: $M_{\text{compound}} = \begin{pmatrix} M_{00} & M_{01} & \dots & M_{0,\text{ncomp_cols}-1} \\ \dots & \dots & \dots & \dots \\ M_{\text{ncomp_rows}-1,0} & M_{\text{ncomp_rows}-1,1} & \dots & M_{\text{ncomp_rows}-1,\text{ncomp_cols}-1} \end{pmatrix}$. The individual components can be associated to different MatrixSpaces. The individual components can also be const and non-const Matrices. If a component is not set (i.e., it's pointer is NULL), then this components is treated like a zero-matrix of appropriate dimensions.

Definition at line 34 of file IpCompoundMatrix.hpp.

3.18.2 Constructor & Destructor Documentation

3.18.2.1 Ipopt::CompoundMatrix::CompoundMatrix (const CompoundMatrixSpace * owner_space)

Constructor, taking the owner_space.

The owner_space has to be defined, so that at each block row and column contain at least one non-NULL component. The individual components can be set afterwards with the SetComp and SetCompNonConst methods.

3.18.3 Member Function Documentation

3.18.3.1 void Ipopt::CompoundMatrix::SetComp (Index irow, Index jcol, const Matrix & matrix)

Method for setting an individual component at position (irow, jcol) in the compound matrix.

The counting of indices starts at 0.

3.18.3.2 SmartPtr<Matrix> Ipopt::CompoundMatrix::GetCompNonConst (Index irow, Index jcol) [inline]

Method for retrieving one block from the compound matrix as a non-const [Matrix](#).

Note that calling this method with mark the [CompoundMatrix](#) as changed. Therefore, only use this method if you are intending to change the [Matrix](#) that you receive.

Definition at line 76 of file IpCompoundMatrix.hpp.

3.18.3.3 Index Ipopt::CompoundMatrix::NComps.Rows () const [inline]

Number of block rows of this compound matrix.

Definition at line 305 of file IpCompoundMatrix.hpp.

3.18.3.4 Index Ipopt::CompoundMatrix::NComps.Cols () const [inline]

Number of block columns of this compound matrix.

Definition at line 311 of file IpCompoundMatrix.hpp.

3.18.3.5 virtual void Ipopt::CompoundMatrix::MultVectorImpl (Number alpha, const Vector & x, Number beta, Vector & y) const [protected],[virtual]

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.18.3.6 `virtual void Ipopt::CompoundMatrix::TransMultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const` `[protected]`, `[virtual]`

Matrix(transpose) vector multiply.

Computes $y = \alpha * \text{Matrix}^T * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.18.3.7 `virtual void Ipopt::CompoundMatrix::AddMSinvZImpl ( Number alpha, const Vector & S, const Vector & Z, Vector & X ) const` `[protected]`, `[virtual]`

$X = \beta * X + \alpha * (\text{Matrix } S^{-1} Z)$.

Specialized implementation.

Reimplemented from [Ipopt::Matrix](#).

3.18.3.8 `virtual void Ipopt::CompoundMatrix::SinvBlrmZMTdBrImpl ( Number alpha, const Vector & S, const Vector & R, const Vector & Z, const Vector & D, Vector & X ) const` `[protected]`, `[virtual]`

$X = S^{-1} (r + \alpha * Z * M^T D)$.

Specialized implementation.

Reimplemented from [Ipopt::Matrix](#).

3.18.3.9 `virtual bool Ipopt::CompoundMatrix::IsValidNumbersImpl ( ) const` `[protected]`, `[virtual]`

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Reimplemented from [Ipopt::Matrix](#).

3.18.3.10 `virtual void Ipopt::CompoundMatrix::ComputeRowAMaxImpl ( Vector & rows_norms, bool init ) const` `[protected]`, `[virtual]`

Compute the max-norm of the rows in the matrix.

The result is stored in *rows_norms*. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.18.3.11 `virtual void Ipopt::CompoundMatrix::ComputeColAMaxImpl ( Vector & cols_norms, bool init ) const` `[protected]`, `[virtual]`

Compute the max-norm of the columns in the matrix.

The result is stored in *cols_norms*. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.18.3.12 `virtual void Ipopt::CompoundMatrix::PrintImpl ( const Journalist & jnlst, EJournalLevel level, EJournalCategory category, const std::string & name, Index indent, const std::string & prefix ) const` `[protected]`, `[virtual]`

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

The documentation for this class was generated from the following file:


- IpCompoundMatrix.hpp

3.19 Ipopt::CompoundMatrixSpace Class Reference

This is the matrix space for [CompoundMatrix](#).

```
#include <IpCompoundMatrix.hpp>
```

Inheritance diagram for Ipopt::CompoundMatrixSpace:

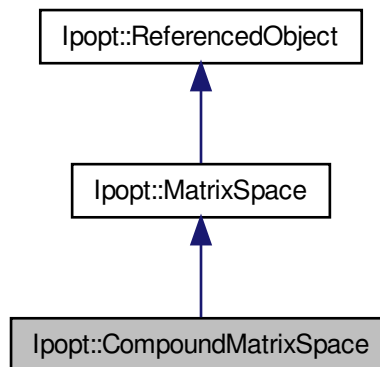

Public Member Functions

- [SmartPtr](#)< const [MatrixSpace](#) > [GetCompSpace](#) (Index irow, Index jcol) const
Obtain the component [MatrixSpace](#) in block row irow and block column jcol.
- [CompoundMatrix](#) * [MakeNewCompoundMatrix](#) () const
Method for creating a new matrix of this specific type.
- virtual [Matrix](#) * [MakeNew](#) () const
Overloaded MakeNew method for the [MatrixSpace](#) base class.

Constructors / Destructors

- [CompoundMatrixSpace](#) (Index ncomps_rows, Index ncomps_cols, Index total_nRows, Index total_nCols)
Constructor, given the number of row and columns blocks, as well as the total number of rows and columns.
- [~CompoundMatrixSpace](#) ()
Destructor.

Methods for setting information about the components.

- void [SetBlockRows](#) (Index irow, Index nrows)
Set the number nrows of rows in row-block number irow.
- void [SetBlockCols](#) (Index jcol, Index ncols)
Set the number ncols of columns in column-block number jcol.
- Index [GetBlockRows](#) (Index irow) const
Get the number nrows of rows in row-block number irow.
- Index [GetBlockCols](#) (Index jcol) const

- Set the number *ncols* of columns in column-block number *jcol*.
 • void [SetCompSpace](#) (Index *irow*, Index *jcol*, const [MatrixSpace](#) &*mat_space*, bool *auto_allocate*=false)
 Set the component [MatrixSpace](#).

Accessor methods

- Index [NComps_Rows](#) () const
 Number of block rows.
- Index [NComps_Cols](#) () const
 Number of block columns.
- bool [Diagonal](#) () const
 True if the blocks lie on the diagonal - can make some operations faster.

3.19.1 Detailed Description

This is the matrix space for [CompoundMatrix](#).

Before a [CompoundMatrix](#) can be created, at least one [MatrixSpace](#) has to be set per block row and column. Individual component [MatrixSpace](#)'s can be set with the [SetComp](#) method.

Definition at line 168 of file [IpCompoundMatrix.hpp](#).

3.19.2 Member Function Documentation

3.19.2.1 void Ipopt::CompoundMatrixSpace::SetBlockRows (Index *irow*, Index *nrows*)

Set the number *nrows* of rows in row-block number *irow*.

3.19.2.2 void Ipopt::CompoundMatrixSpace::SetBlockCols (Index *jcol*, Index *ncols*)

Set the number *ncols* of columns in column-block number *jcol*.

3.19.2.3 Index Ipopt::CompoundMatrixSpace::GetBlockRows (Index *irow*) const

Get the number *nrows* of rows in row-block number *irow*.

3.19.2.4 Index Ipopt::CompoundMatrixSpace::GetBlockCols (Index *jcol*) const

Set the number *ncols* of columns in column-block number *jcol*.

3.19.2.5 void Ipopt::CompoundMatrixSpace::SetCompSpace (Index *irow*, Index *jcol*, const [MatrixSpace](#) &*mat_space*, bool *auto_allocate* = false)

Set the component [MatrixSpace](#).

If *auto_allocate* is true, then a new [CompoundMatrix](#) created later with [MakeNew](#) will have this component automatically created with the [Matrix](#)'s [MakeNew](#). Otherwise, the corresponding component will be NULL and has to be set with the [SetComp](#) methods of the [CompoundMatrix](#).

3.19.2.6 [CompoundMatrix](#)* Ipopt::CompoundMatrixSpace::MakeNewCompoundMatrix () const

Method for creating a new matrix of this specific type.

The documentation for this class was generated from the following file:


- [IpCompoundMatrix.hpp](#)

3.20 Ipopt::CompoundSymMatrix Class Reference

Class for symmetric matrices consisting of other matrices.

```
#include <IpCompoundSymMatrix.hpp>
```

Inheritance diagram for Ipopt::CompoundSymMatrix:

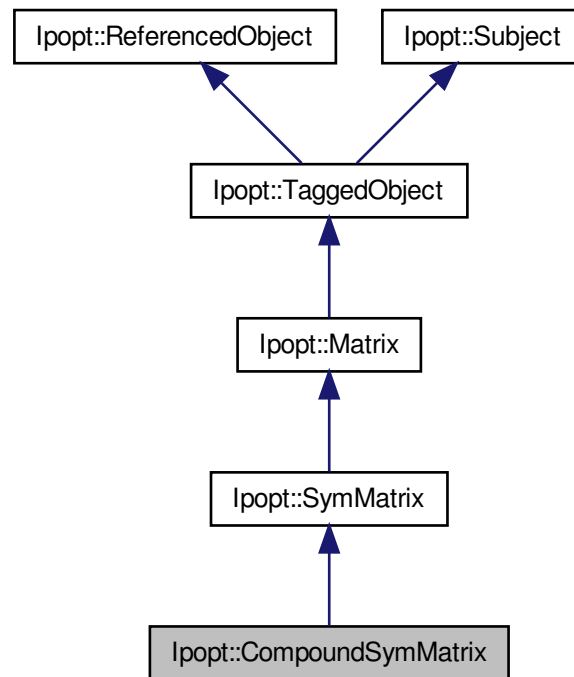

Public Member Functions

- void [SetComp](#) (Index irow, Index jcol, const [Matrix](#) &matrix)
Method for setting an individual component at position (irow, icol) in the compound matrix.
- void [SetCompNonConst](#) (Index irow, Index jcol, [Matrix](#) &matrix)
Non const version of the same method.
- [SmartPtr](#)< const [Matrix](#) > [GetComp](#) (Index irow, Index jcol) const
Method for retrieving one block from the compound matrix.
- [SmartPtr](#)< [Matrix](#) > [GetCompNonConst](#) (Index irow, Index jcol)
Non const version of GetComp.
- [SmartPtr](#)< [CompoundSymMatrix](#) > [MakeNewCompoundSymMatrix](#) () const
Method for creating a new matrix of this specific type.
- Index [NComps_Dim](#) () const
Number of block rows and columns.

Constructors / Destructors

- [CompoundSymMatrix](#) (const [CompoundSymMatrixSpace](#) *owner_space)
Constructor, taking only the number for block components into the row and column direction.
- [~CompoundSymMatrix](#) ()
Destructor.

Protected Member Functions**Methods overloaded from matrix**

- virtual void [MultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix-vector multiply.
- virtual bool [IsValidNumbersImpl](#) () const
Method for determining if all stored numbers are valid (i.e., no Inf or Nan).
- virtual void [ComputeRowAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const
Compute the max-norm of the rows in the matrix.
- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
Print detailed information about the matrix.

Additional Inherited Members**3.20.1 Detailed Description**

Class for symmetric matrices consisting of other matrices.

Here, the lower left block of the matrix is stored.

Definition at line 24 of file IpCompoundSymMatrix.hpp.

3.20.2 Constructor & Destructor Documentation**3.20.2.1 Ipopt::CompoundSymMatrix::CompoundSymMatrix (const CompoundSymMatrixSpace * owner_space)**

Constructor, taking only the number for block components into the row and column direction.

The owner_space has to be defined, so that at each block row and column contain at least one non-NULL component.

3.20.3 Member Function Documentation**3.20.3.1 void Ipopt::CompoundSymMatrix::SetComp (Index irow, Index jcol, const Matrix & matrix)**

Method for setting an individual component at position (irow, icol) in the compound matrix.

The counting of indices starts at 0. Since this only the lower left components are stored, we need to have jcol<=irow, and if irow==jcol, the matrix must be a [SymMatrix](#)

3.20.3.2 SmartPtr<const Matrix> Ipopt::CompoundSymMatrix::GetComp (Index irow, Index jcol) const [inline]

Method for retrieving one block from the compound matrix.

Since this only the lower left components are stored, we need to have jcol<=irow

Definition at line 54 of file IpCompoundSymMatrix.hpp.

3.20.3.3 **SmartPointer<Matrix>** Ipopt::CompoundSymMatrix::GetCompNonConst (Index *irow*, Index *jcol*) [inline]

Non const version of GetComp.

You should only use this method if you are intending to change the matrix you receive, since this [CompoundSymMatrix](#) will be marked as changed.

Definition at line 62 of file IpCompoundSymMatrix.hpp.

3.20.3.4 **SmartPointer<CompoundSymMatrix>** Ipopt::CompoundSymMatrix::MakeNewCompoundSymMatrix () const [inline]

Method for creating a new matrix of this specific type.

Definition at line 277 of file IpCompoundSymMatrix.hpp.

3.20.3.5 **virtual void** Ipopt::CompoundSymMatrix::MultVectorImpl (Number *alpha*, const Vector & *x*, Number *beta*, Vector & *y*) const [protected], [virtual]

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.20.3.6 **virtual bool** Ipopt::CompoundSymMatrix::IsValidNumbersImpl () const [protected], [virtual]

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Reimplemented from [Ipopt::Matrix](#).

3.20.3.7 **virtual void** Ipopt::CompoundSymMatrix::ComputeRowAMaxImpl (Vector & *rows_norms*, bool *init*) const [protected], [virtual]

Compute the max-norm of the rows in the matrix.

The result is stored in *rows_norms*. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.20.3.8 **virtual void** Ipopt::CompoundSymMatrix::PrintImpl (const Journalist & *jnlst*, EJournalLevel *level*, EJournalCategory *category*, const std::string & *name*, Index *indent*, const std::string & *prefix*) const [protected], [virtual]

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

The documentation for this class was generated from the following file:


- IpCompoundSymMatrix.hpp

3.21 Ipopt::CompoundSymMatrixSpace Class Reference

This is the matrix space for [CompoundSymMatrix](#).

```
#include <IpCompoundSymMatrix.hpp>
```

Inheritance diagram for Ipopt::CompoundSymMatrixSpace:

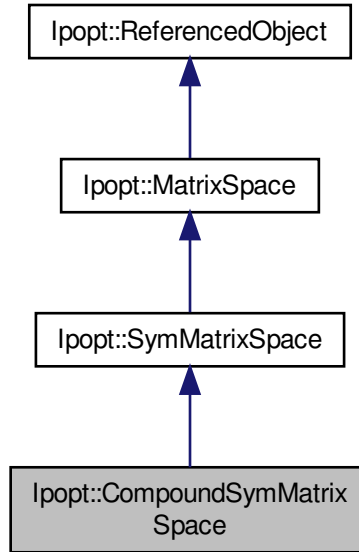

Public Member Functions

- `SmartPointer< const MatrixSpace > GetCompSpace` (Index irow, Index jcol) const
Obtain the component [MatrixSpace](#) in block row irow and block column jcol.
- `CompoundSymMatrix * MakeNewCompoundSymMatrix` () const
Method for creating a new matrix of this specific type.
- virtual `SymMatrix * MakeNewSymMatrix` () const
Overloaded MakeNew method for the [SymMatrixSpace](#) base class.

Constructors / Destructors

- `CompoundSymMatrixSpace` (Index ncomp_spaces, Index total_dim)
Constructor, given the number of blocks (same for rows and columns), as well as the total dimension of the matrix.
- `~CompoundSymMatrixSpace` ()
Destructor.

Methods for setting information about the components.

- void `SetBlockDim` (Index irow_jcol, Index dim)
Set the dimension dim for block row (or column) irow_jcol.
- Index `GetBlockDim` (Index irow_jcol) const
Get the dimension dim for block row (or column) irow_jcol.
- void `SetCompSpace` (Index irow, Index jcol, const [MatrixSpace](#) &mat_space, bool auto_allocate=false)
Set the component [SymMatrixSpace](#).

Accessor methods

- Index **NComps_Dim** () const

3.21.1 Detailed Description

This is the matrix space for [CompoundSymMatrix](#).

Before a [CompoundSymMatrix](#) can be created, at least one [SymMatrixSpace](#) has to be set per block row and column. Individual component [SymMatrixSpace](#)'s can be set with the SetComp method.

Definition at line 171 of file IpCompoundSymMatrix.hpp.

3.21.2 Member Function Documentation

3.21.2.1 void Ipopt::CompoundSymMatrixSpace::SetCompSpace (Index *irow*, Index *jcol*, const MatrixSpace & *mat.space*, bool *auto_allocate* = false)

Set the component [SymMatrixSpace](#).

If auto_allocate is true, then a new [CompoundSymMatrix](#) created later with MakeNew will have this component automatically created with the [SymMatrix](#)'s MakeNew. Otherwise, the corresponding component will be NULL and has to be set with the SetComp methods of the [CompoundSymMatrix](#).

3.21.2.2 [CompoundSymMatrix*](#) Ipopt::CompoundSymMatrixSpace::MakeNewCompoundSymMatrix () const

Method for creating a new matrix of this specific type.

The documentation for this class was generated from the following file:


- IpCompoundSymMatrix.hpp

3.22 Ipopt::CompoundVector Class Reference

Class of Vectors consisting of other vectors.

```
#include <IpCompoundVector.hpp>
```

Inheritance diagram for Ipopt::CompoundVector:

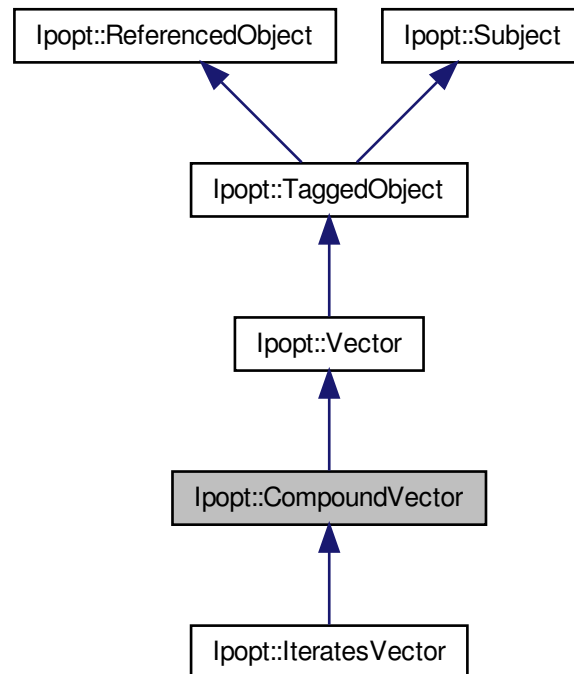

Public Member Functions

- void [SetComp](#) (Index icomp, const [Vector](#) &vec)
Method for setting the pointer for a component that is a const [Vector](#).
- void [SetCompNonConst](#) (Index icomp, [Vector](#) &vec)
Method for setting the pointer for a component that is a non-const [Vector](#).
- Index [NComps](#) () const
Number of components of this compound vector.
- bool [IsCompConst](#) (Index i) const
Check if a particular component is const or not.
- bool [IsCompNull](#) (Index i) const
Check if a particular component is null or not.
- [SmartPtr](#)< const [Vector](#) > [GetComp](#) (Index i) const
Return a particular component (const version)
- [SmartPtr](#)< [Vector](#) > [GetCompNonConst](#) (Index i)
Return a particular component (non-const version).

Constructors/Destructors

- [CompoundVector](#) (const [CompoundVectorSpace](#) *owner_space, bool create_new)

- Constructor, given the corresponding [CompoundVectorSpace](#).
- virtual [~CompoundVector](#) ()
Default destructor.

Protected Member Functions

- virtual bool [IsValidNumbersImpl](#) () const
Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Overloaded methods from Vector base class

- virtual void [CopyImpl](#) (const [Vector](#) &x)
Copy the data of the vector x into this vector (DCOPY).
- virtual void [ScallImpl](#) (Number alpha)
Scales the vector by scalar alpha (DSCAL)
- virtual void [Axpympl](#) (Number alpha, const [Vector](#) &x)
Add the multiple alpha of vector x to this vector (DAXPY)
- virtual Number [DotImpl](#) (const [Vector](#) &x) const
Computes inner product of vector x with this (DDOT)
- virtual Number [Nrm2Impl](#) () const
Computes the 2-norm of this vector (DNRM2)
- virtual Number [AsumImpl](#) () const
Computes the 1-norm of this vector (DASUM)
- virtual Number [AmaxImpl](#) () const
Computes the max-norm of this vector (based on IDAMAX)
- virtual void [SetImpl](#) (Number value)
Set each element in the vector to the scalar alpha.
- virtual void [ElementWiseDivideImpl](#) (const [Vector](#) &x)
Element-wise division $y_i \leftarrow y_i / x_i$.
- virtual void [ElementWiseMultiplyImpl](#) (const [Vector](#) &x)
Element-wise multiplication $y_i \leftarrow y_i * x_i$.
- virtual void [ElementWiseMaxImpl](#) (const [Vector](#) &x)
Element-wise max against entries in x.
- virtual void [ElementWiseMinImpl](#) (const [Vector](#) &x)
Element-wise min against entries in x.
- virtual void [ElementWiseReciprocalImpl](#) ()
Element-wise reciprocal.
- virtual void [ElementWiseAbsImpl](#) ()
Element-wise absolute values.
- virtual void [ElementWiseSqrtImpl](#) ()
Element-wise square-root.
- virtual void [ElementWiseSgnImpl](#) ()
Replaces entries with sgn of the entry.
- virtual void [AddScalarImpl](#) (Number scalar)
Add scalar to every component of the vector.
- virtual Number [MaxImpl](#) () const
Max value in the vector.
- virtual Number [MinImpl](#) () const
Min value in the vector.
- virtual Number [SumImpl](#) () const
Computes the sum of the lements of vector.
- virtual Number [SumLogsImpl](#) () const

Computes the sum of the logs of the elements of vector.

Implemented specialized functions

- void [AddTwoVectorsImpl](#) (Number a, const [Vector](#) &v1, Number b, const [Vector](#) &v2, Number c)
*Add two vectors ($a * v1 + b * v2$).*
- Number [FracToBoundImpl](#) (const [Vector](#) &delta, Number tau) const
Fraction to the boundary parameter.
- void [AddVectorQuotientImpl](#) (Number a, const [Vector](#) &z, const [Vector](#) &s, Number c)
*Add the quotient of two vectors, $y = a * z/s + c * y$.*

Output methods

- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
Print the entire vector.

Additional Inherited Members

3.22.1 Detailed Description

Class of Vectors consisting of other vectors.

This vector is a vector that consists of zero, one or more [Vector](#)'s which are stacked on each others: $x_{\text{compound}} = \begin{pmatrix} x_0 \\ \dots \\ x_{n_{\text{comps}}-1} \end{pmatrix}$. The individual components can be associated to different VectorSpaces. The individual components can also be const and non-const Vectors.

Definition at line 30 of file IpCompoundVector.hpp.

3.22.2 Constructor & Destructor Documentation

3.22.2.1 Ipopt::CompoundVector::CompoundVector (const CompoundVectorSpace * owner_space, bool create_new)

Constructor, given the corresponding [CompoundVectorSpace](#).

Before this constructor can be called, all components of the [CompoundVectorSpace](#) have to be set, so that the constructors for the individual components can be called. If the flag create_new is true, then the individual components of the new [CompoundVector](#) are initialized with the MakeNew methods of each [VectorSpace](#) (and are non-const). Otherwise, the individual components can later be set using the SetComp and SetCompNonConst method.

3.22.3 Member Function Documentation

3.22.3.1 SmartPtr<Vector> Ipopt::CompoundVector::GetCompNonConst (Index i) [inline]

Return a particular component (non-const version).

Note that calling this method with mark the [CompoundVector](#) as changed. Therefore, only use this method if you are intending to change the [Vector](#) that you receive.

Definition at line 96 of file IpCompoundVector.hpp.

3.22.3.2 `virtual void Ipopt::CompoundVector::CopyImpl ( const Vector & x ) [protected], [virtual]`

Copy the data of the vector x into this vector (DCOPY).

Implements [Ipopt::Vector](#).

3.22.3.3 `virtual void Ipopt::CompoundVector::SetImpl ( Number value ) [protected], [virtual]`

Set each element in the vector to the scalar α .

Implements [Ipopt::Vector](#).

3.22.3.4 `virtual void Ipopt::CompoundVector::ElementWiseDivideImpl ( const Vector & x ) [protected], [virtual]`

Element-wise division $y_i \leftarrow y_i/x_i$.

Implements [Ipopt::Vector](#).

3.22.3.5 `virtual void Ipopt::CompoundVector::ElementWiseMultiplyImpl ( const Vector & x ) [protected], [virtual]`

Element-wise multiplication $y_i \leftarrow y_i * x_i$.

Implements [Ipopt::Vector](#).

3.22.3.6 `virtual void Ipopt::CompoundVector::AddScalarImpl ( Number scalar ) [protected], [virtual]`

Add scalar to every component of the vector.

Implements [Ipopt::Vector](#).

3.22.3.7 `void Ipopt::CompoundVector::AddTwoVectorsImpl ( Number a, const Vector & v1, Number b, const Vector & v2, Number c ) [protected], [virtual]`

Add two vectors ($a * v1 + b * v2$).

Result is stored in this vector.

Reimplemented from [Ipopt::Vector](#).

3.22.3.8 `Number Ipopt::CompoundVector::FracToBoundImpl ( const Vector & delta, Number tau ) const [protected], [virtual]`

Fraction to the boundary parameter.

Reimplemented from [Ipopt::Vector](#).

3.22.3.9 `void Ipopt::CompoundVector::AddVectorQuotientImpl ( Number a, const Vector & z, const Vector & s, Number c ) [protected], [virtual]`

Add the quotient of two vectors, $y = a * z/s + c * y$.

Reimplemented from [Ipopt::Vector](#).

3.22.3.10 `virtual bool Ipopt::CompoundVector::IsValidNumbersImpl ( ) const [protected], [virtual]`

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Reimplemented from [Ipopt::Vector](#).

The documentation for this class was generated from the following file:


- IpCompoundVector.hpp

3.23 Ipopt::CompoundVectorSpace Class Reference

This vectors space is the vector space for [CompoundVector](#).

```
#include <IpCompoundVector.hpp>
```

Inheritance diagram for Ipopt::CompoundVectorSpace:

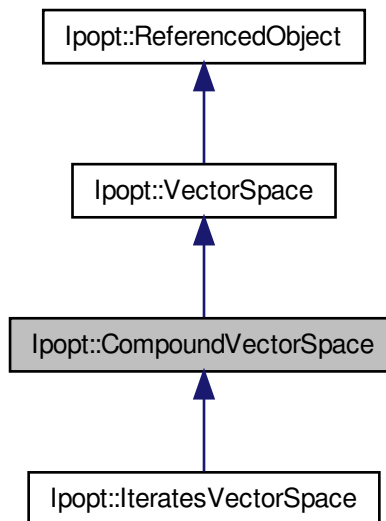

Public Member Functions

- virtual void [SetCompSpace](#) (Index icomp, const [VectorSpace](#) &vec_space)
Method for setting the individual component VectorSpaces.
- [SmartPtr](#)< const [VectorSpace](#) > [GetCompSpace](#) (Index icomp) const
Method for obtaining an individual component VectorSpace.
- Index [NCompSpaces](#) () const
Accessor method to obtain the number of components.
- virtual [CompoundVector](#) * [MakeNewCompoundVector](#) (bool create_new=true) const
Method for creating a new vector of this specific type.
- virtual [Vector](#) * [MakeNew](#) () const
Overloaded MakeNew method for the VectorSpace base class.

Constructors/Destructors.

- [CompoundVectorSpace](#) (Index ncomp_spaces, Index total_dim)
Constructor, has to be given the number of components and the total dimension of all components combined.
- [~CompoundVectorSpace](#) ()
Destructor.

3.23.1 Detailed Description

This vectors space is the vector space for [CompoundVector](#).

Before a [CompoundVector](#) can be created, all components of this [CompoundVectorSpace](#) have to be set. When calling the constructor, the number of component has to be specified. The individual VectorSpaces can be set with the SetComp method.

Definition at line 239 of file IpCompoundVector.hpp.

3.23.2 Constructor & Destructor Documentation

3.23.2.1 Ipopt::CompoundVectorSpace::CompoundVectorSpace (Index *ncomp_spaces*, Index *total_dim*)

Constructor, has to be given the number of components and the total dimension of all components combined.

3.23.3 Member Function Documentation

3.23.3.1 virtual void Ipopt::CompoundVectorSpace::SetCompSpace (Index *icomp*, const VectorSpace & *vec_space*) [virtual]

Method for setting the individual component VectorSpaces.

Parameters

<i>icomp</i>	Number of the component to be set
<i>vec_space</i>	VectorSpace for component icomp

Reimplemented in [Ipopt::IteratesVectorSpace](#).

3.23.3.2 virtual CompoundVector* Ipopt::CompoundVectorSpace::MakeNewCompoundVector (bool *create_new* = true) const [inline], [virtual]

Method for creating a new vector of this specific type.

Reimplemented in [Ipopt::IteratesVectorSpace](#).

Definition at line 268 of file IpCompoundVector.hpp.

The documentation for this class was generated from the following file:


- IpCompoundVector.hpp

3.24 Ipopt::ConvergenceCheck Class Reference

Base class for checking the algorithm termination criteria.

```
#include <IpConvCheck.hpp>
```

Inheritance diagram for Ipopt::ConvergenceCheck:

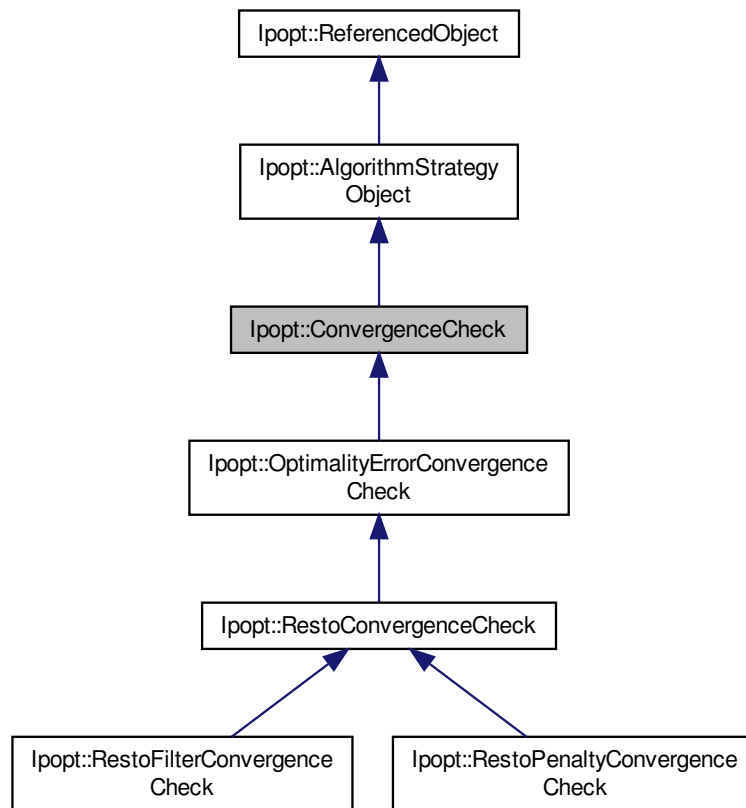

Public Types

- enum [ConvergenceStatus](#)
Convergence return enum.

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
overloaded from [AlgorithmStrategyObject](#)
- virtual [ConvergenceStatus](#) [CheckConvergence](#) (bool call_intermediate_callback=true)=0
Pure virtual method for performing the convergence test.
- virtual bool [CurrentIsAcceptable](#) ()=0
Method for testing if the current iterate is considered to satisfy the "acceptable level" of accuracy.

Constructors/Destructors

- [ConvergenceCheck](#) ()

- *Constructor.*
- virtual [~ConvergenceCheck](#) ()
- *Default destructor.*

Additional Inherited Members

3.24.1 Detailed Description

Base class for checking the algorithm termination criteria.

Definition at line 20 of file IpConvCheck.hpp.

3.24.2 Member Function Documentation

3.24.2.1 virtual **ConvergenceStatus** Ipopt::ConvergenceCheck::CheckConvergence (bool *call_intermediate_callback* = true)
[pure virtual]

Pure virtual method for performing the convergence test.

If *call_intermediate_callback* is true, the user callback method in the [NLP](#) should be called in order to see if the user requests an early termination.

Implemented in [Ipopt::RestoConvergenceCheck](#), and [Ipopt::OptimalityErrorConvergenceCheck](#).

3.24.2.2 virtual bool Ipopt::ConvergenceCheck::CurrentIsAcceptable () [pure virtual]

Method for testing if the current iterate is considered to satisfy the "acceptable level" of accuracy.

The idea is that if the desired convergence tolerance cannot be achieved, the algorithm might stop after a number of acceptable points have been encountered.

Implemented in [Ipopt::OptimalityErrorConvergenceCheck](#).

The documentation for this class was generated from the following file:


- IpConvCheck.hpp

3.25 Ipopt::DefaultIterateInitializer Class Reference

Class implementing the default initialization procedure (based on user options) for the iterates.

```
#include <IpDefaultIterateInitializer.hpp>
```

Inheritance diagram for Ipopt::DefaultIterateInitializer:

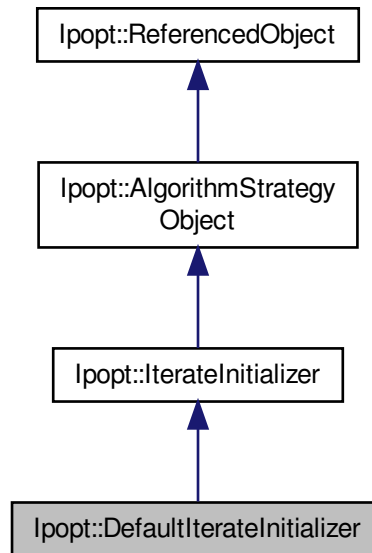

Public Types

Enums of option values

- enum **BoundMultInitMethod**

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [SetInitialIterates](#) ()
Compute the initial iterates and set the into the curr field of the ip_data object.

Constructors/Destructors

- [DefaultIterateInitializer](#) (const [SmartPtr](#)< [EqMultiplierCalculator](#) > &eq_mult_calculator, const [SmartPtr](#)< [IterateInitializer](#) > &warm_start_initializer, const [SmartPtr](#)< [AugSystemSolver](#) > aug_system_solver=NULL)
Constructor.
- virtual [~DefaultIterateInitializer](#) ()
Default destructor.

Static Public Member Functions

- static void [push_variables](#) (const [Journalist](#) &jnlst, Number bound_push, Number bound_frac, std::string name, const [Vector](#) &orig_x, [SmartPtr](#)< const [Vector](#) > &new_x, const [Vector](#) &x_L, const [Vector](#) &x_U, const [Matrix](#) &Px_L, const [Matrix](#) &Px_U)

Auxilliary function for moving the initial point.

- static void [least_square_mults](#) (const [Journalist](#) &jnlst, [IpoptNLP](#) &ip_nlp, [IpoptData](#) &ip_data, [IpoptCalculatedQuantities](#) &ip_cq, const [SmartPtr](#)< [EqMultiplierCalculator](#) > &eq_mult_calculator, Number constr_mult_init_max)

Auxilliary function for computing least_square multipliers.

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > reg_options)

Methods for IpoptType.

Additional Inherited Members

3.25.1 Detailed Description

Class implementing the default initialization procedure (based on user options) for the iterates.

It is used at the very beginning of the optimization for determine the starting point for all variables.

Definition at line 24 of file IpDefaultIterateInitializer.hpp.

3.25.2 Constructor & Destructor Documentation

- 3.25.2.1 [Ipopt::DefaultIterateInitializer::DefaultIterateInitializer](#) (const [SmartPtr](#)< [EqMultiplierCalculator](#) > &eq_mult_calculator, const [SmartPtr](#)< [IterateInitializer](#) > &warm_start_initializer, const [SmartPtr](#)< [AugSystemSolver](#) > aug_system_solver = NULL)

Constructor.

If eq_mult_calculator is not NULL, it will be used to compute the initial values for equality constraint multipliers. If warm_start_initializer is not NULL, it will be used to compute the initial values if the option warm_start_init_point is chosen.

3.25.3 Member Function Documentation

- 3.25.3.1 virtual bool [Ipopt::DefaultIterateInitializer::SetInitialIterates](#) () [virtual]

Compute the initial iterates and set the into the curr field of the ip_data object.

Implements [Ipopt::IterateInitializer](#).

- 3.25.3.2 static void [Ipopt::DefaultIterateInitializer::push_variables](#) (const [Journalist](#) &jnlst, Number bound_push, Number bound_frac, std::string name, const [Vector](#) &orig_x, [SmartPtr](#)< const [Vector](#) > &new_x, const [Vector](#) &x_L, const [Vector](#) &x_U, const [Matrix](#) &Px_L, const [Matrix](#) &Px_U) [static]

Auxilliary function for moving the initial point.

This is declared static so that it can also be used from [WarmStartIterateInitializer](#).

3.25.3.3 `static void Ipopt::DefaultIterateInitializer::least_square_mults ( const Journalist & jnlst, IpoptNLP & ip_nlp, IpoptData & ip_data, IpoptCalculatedQuantities & ip_cq, const SmartPtr< EqMultiplierCalculator > & eq_mult_calculator, Number constr_mult_init_max ) [static]`

Auxilliary function for computing least_square multipliers.

The multipliers are computed based on the values in the trial fields (current is overwritten). On return, the multipliers are in the trial fields as well. The value of `constr_mult_init_max` determines if the computed least square estimate should be used, or if the initial multipliers are set to zero.

The documentation for this class was generated from the following file:


- `IpDefaultIterateInitializer.hpp`

3.26 Ipopt::DenseGenMatrix Class Reference

Class for dense general matrices.

```
#include <IpDenseGenMatrix.hpp>
```

Inheritance diagram for `Ipopt::DenseGenMatrix`:

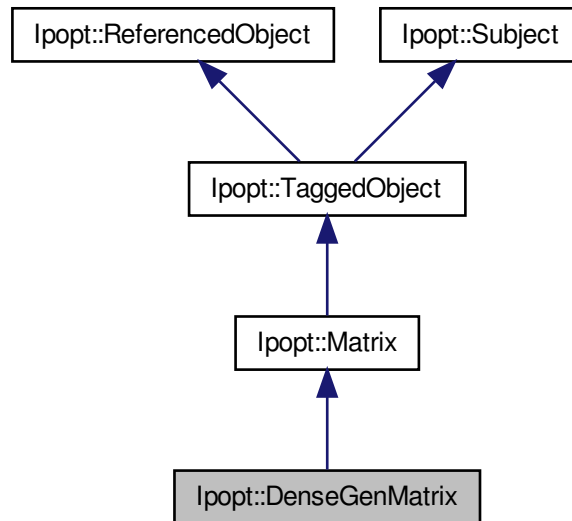

Public Member Functions

- `SmartPtr< DenseGenMatrix > MakeNewDenseGenMatrix () const`
Create a new DenseGenMatrix from same MatrixSpace.
- `Number * Values ()`
Retrieve the array for storing the matrix elements.
- `const Number * Values () const`

- Retrieve the array that stores the matrix elements.*

 - void **Copy** (const **DenseGenMatrix** &M)

Method for copying the content of another matrix into this matrix.
- void **FillIdentity** (Number factor=1.)

Set this matrix to be a multiple of the identity matrix .
- void **ScaleColumns** (const **DenseVector** &scal_vec)

Method for scaling the columns of the matrix.
- void **AddMatrixProduct** (Number alpha, const **DenseGenMatrix** &A, bool transA, const **DenseGenMatrix** &B, bool transB, Number beta)

Method for adding the product of two matrices to this matrix.
- void **HighRankUpdateTranspose** (Number alpha, const **MultiVectorMatrix** &V1, const **MultiVectorMatrix** &V2, Number beta)

Method for adding a high-rank update to this matrix.
- bool **ComputeCholeskyFactor** (const **DenseSymMatrix** &M)

Method for computing the Cholesky factorization of a positive definite matrix.
- bool **ComputeEigenVectors** (const **DenseSymMatrix** &M, **DenseVector** &Evalues)

Method for computing an eigenvalue decomposition of the given symmetrix matrix M.
- void **CholeskyBackSolveMatrix** (bool trans, Number alpha, **DenseGenMatrix** &B) const

Method for performing one backsolve with an entire matrix on the right hand side, assuming that the this matrix is square and contains a lower triangular matrix.
- void **CholeskySolveVector** (**DenseVector** &b) const

Method for performing a solve of a linear system for one vector, assuming that this matrix contains the Cholesky factor for the linear system.
- void **CholeskySolveMatrix** (**DenseGenMatrix** &B) const

Method for performing a solve of a linear system for one right-hand-side matrix, assuming that this matrix contains the Cholesky factor for the linear system.
- bool **ComputeLUFactorInPlace** ()

Method for computing the LU factorization of an unsymmetric matrix.
- void **LUSolveMatrix** (**DenseGenMatrix** &B) const

Method for using a previously computed LU factorization for a backsolve with a matrix on the rhs.
- void **LUSolveVector** (**DenseVector** &b) const

Method for using a previously computed LU fatorization for a backsolve with a single vector.

Constructors / Destructors

- **DenseGenMatrix** (const **DenseGenMatrixSpace** *owner_space)
- Constructor, taking the owner_space.*
- **~DenseGenMatrix** ()
- Destructor.*

Protected Member Functions

Overloaded methods from Matrix base class

- virtual void **MultVectorImpl** (Number alpha, const **Vector** &x, Number beta, **Vector** &y) const
- Matrix-vector multiply.*
- virtual void **TransMultVectorImpl** (Number alpha, const **Vector** &x, Number beta, **Vector** &y) const
- Matrix(transpose) vector multiply.*
- virtual bool **IsValidNumbersImpl** () const
- Method for determining if all stored numbers are valid (i.e., no Inf or Nan).*

- virtual void [ComputeRowAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const
Compute the max-norm of the rows in the matrix.
- virtual void [ComputeColAMaxImpl](#) ([Vector](#) &cols_norms, bool init) const
Compute the max-norm of the columns in the matrix.
- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
Print detailed information about the matrix.

Additional Inherited Members

3.26.1 Detailed Description

Class for dense general matrices.

[Matrix](#) elements are stored in one array in "Fortran" format.

Definition at line 26 of file IpDenseGenMatrix.hpp.

3.26.2 Member Function Documentation

3.26.2.1 `Number* Ipopt::DenseGenMatrix::Values ( ) [inline]`

Retrieve the array for storing the matrix elements.

This is the non-const version, and it is assume that afterwards the calling method will set all matrix elements. The matrix elements are stored one column after each other.

Definition at line 48 of file IpDenseGenMatrix.hpp.

3.26.2.2 `const Number* Ipopt::DenseGenMatrix::Values ( ) const [inline]`

Retrieve the array that stores the matrix elements.

This is the const version, i.e., read-only. The matrix elements are stored one column after each other.

Definition at line 58 of file IpDenseGenMatrix.hpp.

3.26.2.3 `void Ipopt::DenseGenMatrix::FillIdentity ( Number factor = 1 . )`

Set this matrix to be a multiple of the identity matrix .

This assumes that this matrix is square.

3.26.2.4 `void Ipopt::DenseGenMatrix::ScaleColumns ( const DenseVector & scal_vec )`

Method for scaling the columns of the matrix.

The scaling factors are given in form of a [DenseVector](#)

3.26.2.5 `void Ipopt::DenseGenMatrix::AddMatrixProduct ( Number alpha, const DenseGenMatrix & A, bool transA, const DenseGenMatrix & B, bool transB, Number beta )`

Method for adding the product of two matrices to this matrix.

3.26.2.6 `void Ipopt::DenseGenMatrix::HighRankUpdateTranspose ( Number alpha, const MultiVectorMatrix & V1, const MultiVectorMatrix & V2, Number beta )`

Method for adding a high-rank update to this matrix.

It computes $M = \alpha * V1^T V2 + \beta * M$, where $V1$ and $V2$ are MultiVectorMatrices.

3.26.2.7 bool Ipopt::DenseGenMatrix::ComputeCholeskyFactor (const DenseSymMatrix & *M*)

Method for computing the Cholesky factorization of a positive definite matrix.

The factor is stored in this matrix, as lower-triangular matrix, i.e., $M = J * J^T$. The return value is false if the factorization could not be done, e.g., when the matrix is not positive definite.

3.26.2.8 bool Ipopt::DenseGenMatrix::ComputeEigenVectors (const DenseSymMatrix & *M*, DenseVector & *Evalues*)

Method for computing an eigenvalue decomposition of the given symmetric matrix M .

On return, this matrix contains the eigenvalues in its columns, and *Evalues* contains the eigenvalues. The return value is false, if there are problems during the computation.

3.26.2.9 void Ipopt::DenseGenMatrix::CholeskyBackSolveMatrix (bool *trans*, Number *alpha*, DenseGenMatrix & *B*) const

Method for performing one backsolve with an entire matrix on the right hand side, assuming that this matrix is square and contains a lower triangular matrix.

The incoming right hand side B is overwritten with the solution X of $op(A)*X = \alpha*B$. $op(A) = A$ or $op(A) = A^T$.

3.26.2.10 void Ipopt::DenseGenMatrix::CholeskySolveVector (DenseVector & *b*) const

Method for performing a solve of a linear system for one vector, assuming that this matrix contains the Cholesky factor for the linear system.

The vector b contains the right hand side on input, and contains the solution on output.

3.26.2.11 void Ipopt::DenseGenMatrix::CholeskySolveMatrix (DenseGenMatrix & *B*) const

Method for performing a solve of a linear system for one right-hand-side matrix, assuming that this matrix contains the Cholesky factor for the linear system.

The matrix B contains the right hand sides on input, and contains the solution on output.

3.26.2.12 bool Ipopt::DenseGenMatrix::ComputeLUFactorInPlace ()

Method for computing the LU factorization of an unsymmetric matrix.

The factorization is done in place.

3.26.2.13 void Ipopt::DenseGenMatrix::LUSolveMatrix (DenseGenMatrix & *B*) const

Method for using a previously computed LU factorization for a backsolve with a matrix on the rhs.

3.26.2.14 void Ipopt::DenseGenMatrix::LUSolveVector (DenseVector & *b*) const

Method for using a previously computed LU factorization for a backsolve with a single vector.

3.26.2.15 virtual void Ipopt::DenseGenMatrix::MultVectorImpl (Number *alpha*, const Vector & *x*, Number *beta*, Vector & *y*) const [protected], [virtual]

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.26.2.16 `virtual void Ipopt::DenseGenMatrix::TransMultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const` [protected],[virtual]

Matrix(transpose) vector multiply.

Computes $y = \alpha * \text{Matrix}^T * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.26.2.17 `virtual bool Ipopt::DenseGenMatrix::IsValidNumbersImpl ( ) const` [protected],[virtual]

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Reimplemented from [Ipopt::Matrix](#).

3.26.2.18 `virtual void Ipopt::DenseGenMatrix::ComputeRowAMaxImpl ( Vector & rows_norms, bool init ) const` [protected],[virtual]

Compute the max-norm of the rows in the matrix.

The result is stored in *rows_norms*. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.26.2.19 `virtual void Ipopt::DenseGenMatrix::ComputeColAMaxImpl ( Vector & cols_norms, bool init ) const` [protected],[virtual]

Compute the max-norm of the columns in the matrix.

The result is stored in *cols_norms*. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.26.2.20 `virtual void Ipopt::DenseGenMatrix::PrintImpl ( const Journalist & jnlst, EJournalLevel level, EJournalCategory category, const std::string & name, Index indent, const std::string & prefix ) const` [protected],[virtual]

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

The documentation for this class was generated from the following file:


- IpDenseGenMatrix.hpp

3.27 Ipopt::DenseGenMatrixSpace Class Reference

This is the matrix space for [DenseGenMatrix](#).

```
#include <IpDenseGenMatrix.hpp>
```

Inheritance diagram for Ipopt::DenseGenMatrixSpace:

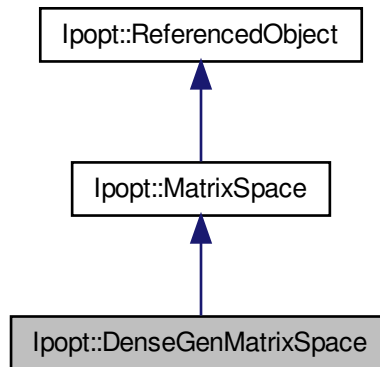

Public Member Functions

- [DenseGenMatrix](#) * [MakeNewDenseGenMatrix](#) () const
Method for creating a new matrix of this specific type.
- virtual [Matrix](#) * [MakeNew](#) () const
Overloaded MakeNew method for the [MatrixSpace](#) base class.

Constructors / Destructors

- [DenseGenMatrixSpace](#) (Index nRows, Index nCols)
Constructor for matrix space for DenseGenMatrices.
- [~DenseGenMatrixSpace](#) ()
Destructor.

3.27.1 Detailed Description

This is the matrix space for [DenseGenMatrix](#).

Definition at line 208 of file IpDenseGenMatrix.hpp.

3.27.2 Constructor & Destructor Documentation

3.27.2.1 Ipopt::DenseGenMatrixSpace::DenseGenMatrixSpace (Index *nRows*, Index *nCols*)

Constructor for matrix space for DenseGenMatrices.

Takes in dimension of the matrices.

3.27.3 Member Function Documentation

3.27.3.1 DenseGenMatrix* Ipopt::DenseGenMatrixSpace::MakeNewDenseGenMatrix () const [inline]

Method for creating a new matrix of this specific type.

Definition at line 224 of file IpDenseGenMatrix.hpp.

The documentation for this class was generated from the following file:


- IpDenseGenMatrix.hpp

3.28 Ipopt::DenseSymMatrix Class Reference

Class for dense symetrix matrices.

```
#include <IpDenseSymMatrix.hpp>
```

Inheritance diagram for Ipopt::DenseSymMatrix:

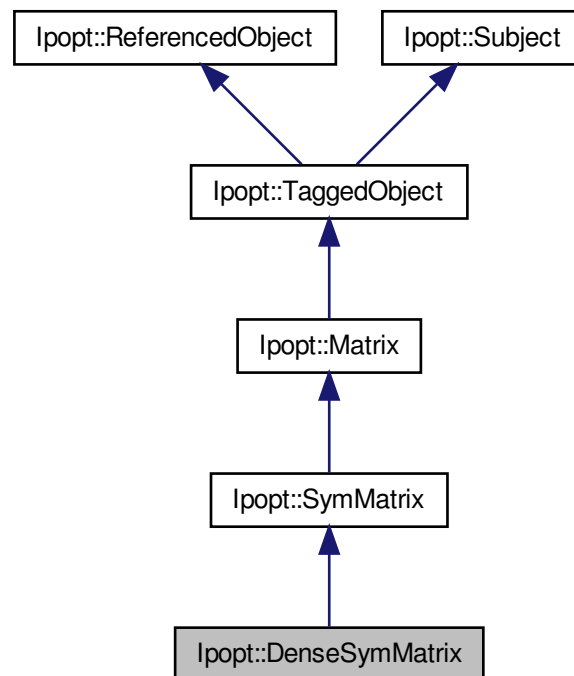

Public Member Functions

- [SmartPointer< DenseSymMatrix > MakeNewDenseSymMatrix \(\) const](#)
Create a new [DenseSymMatrix](#) from same [MatrixSpace](#).
- Number * [Values \(\)](#)

- Retrieve the array for storing the matrix elements.*
- const Number * [Values](#) () const
- Retrieve the array that stores the matrix elements.*
- void [FillIdentity](#) (Number factor=1.)
- Set this matrix to be a multiple of the identity matrix.*
- void [AddMatrix](#) (Number alpha, const [DenseSymMatrix](#) &A, Number beta)
- Method for adding another matrix to this one.*
- void [HighRankUpdate](#) (bool trans, Number alpha, const [DenseGenMatrix](#) &V, Number beta)
- Method for adding a high-rank update to this matrix.*
- void [HighRankUpdateTranspose](#) (Number alpha, const [MultiVectorMatrix](#) &V1, const [MultiVectorMatrix](#) &V2, Number beta)
- Method for adding a high-rank update to this matrix.*
- void [SpecialAddForLSR1](#) (const [DenseVector](#) &D, const [DenseGenMatrix](#) &L)
- Method for doing a specialized Add operation, required in the limited memory SR1 update.*

Constructors / Destructors

- [DenseSymMatrix](#) (const [DenseSymMatrixSpace](#) *owner_space)
- Constructor, taking the owner_space.*
- [~DenseSymMatrix](#) ()
- Destructor.*

Protected Member Functions

Overloaded methods from Matrix base class

- virtual void [MultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
- Matrix-vector multiply.*
- virtual bool [IsValidNumbersImpl](#) () const
- Method for determining if all stored numbers are valid (i.e., no Inf or Nan).*
- virtual void [ComputeRowAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const
- Compute the max-norm of the rows in the matrix.*
- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
- Print detailed information about the matrix.*

Additional Inherited Members

3.28.1 Detailed Description

Class for dense symetrix matrices.

[Matrix](#) elements are stored in one array in "Fortran" format, using BLAS "lower triangular" storage (not packed).

Definition at line 31 of file IpDenseSymMatrix.hpp.

3.28.2 Member Function Documentation

3.28.2.1 `Number* Ipopt::DenseSymMatrix::Values ( ) [inline]`

Retrieve the array for storing the matrix elements.

This is the non-const version, and it is assume that afterwards the calling method will set all matrix elements. The matrix elements are stored one column after each other.

Definition at line 53 of file IpDenseSymMatrix.hpp.

3.28.2.2 `const Number* Ipopt::DenseSymMatrix::Values ( ) const [inline]`

Retrieve the array that stores the matrix elements.

This is the const version, i.e., read-only. The matrix elements are stored one column after each other.

Definition at line 63 of file IpDenseSymMatrix.hpp.

3.28.2.3 `void Ipopt::DenseSymMatrix::FillIdentity ( Number factor = 1 . )`

Set this matrix to be a multiple of the identity matrix.

3.28.2.4 `void Ipopt::DenseSymMatrix::AddMatrix ( Number alpha, const DenseSymMatrix & A, Number beta )`

Method for adding another matrix to this one.

If B is this matrix, it becomes $B = \alpha * A + \beta * B$ after this call.

3.28.2.5 `void Ipopt::DenseSymMatrix::HighRankUpdate ( bool trans, Number alpha, const DenseGenMatrix & V, Number beta )`

Method for adding a high-rank update to this matrix.

It computes $M = \alpha * \text{op}(V) \text{op}(V)^T + \beta * M$, where V is a [DenseGenMatrix](#), where $\text{op}(V)$ is V^T if trans is true.

3.28.2.6 `void Ipopt::DenseSymMatrix::HighRankUpdateTranspose ( Number alpha, const MultiVectorMatrix & V1, const MultiVectorMatrix & V2, Number beta )`

Method for adding a high-rank update to this matrix.

It computes $M = \alpha * V1^T V2 + \beta * M$, where V1 and V2 are MultiVectorMatrices, so that $V1^T V2$ is symmetric.

3.28.2.7 `void Ipopt::DenseSymMatrix::SpecialAddForLMSR1 ( const DenseVector & D, const DenseGenMatrix & L )`

Method for doing a specialized Add operation, required in the limited memory SR1 update.

If M is this matrix, it computes $M = M + D + L + L^T$, where D is a diagonal matrix (given as a [DenseVector](#)), and L is a matrix that is assumed to be strictly lower triangular.

3.28.2.8 `virtual void Ipopt::DenseSymMatrix::MultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const [protected], [virtual]`

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.28.2.9 `virtual bool Ipopt::DenseSymMatrix::IsValidNumbersImpl ( ) const [protected], [virtual]`

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Reimplemented from [Ipopt::Matrix](#).

3.28.2.10 `virtual void Ipopt::DenseSymMatrix::ComputeRowAMaxImpl ( Vector & rows_norms, bool init ) const`
`[protected], [virtual]`

Compute the max-norm of the rows in the matrix.

The result is stored in rows_norms. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.28.2.11 `virtual void Ipopt::DenseSymMatrix::PrintImpl ( const Journalist & jnlst, EJournalLevel level, EJournalCategory category, const std::string & name, Index indent, const std::string & prefix ) const` `[protected], [virtual]`

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

The documentation for this class was generated from the following file:


- IpDenseSymMatrix.hpp

3.29 Ipopt::DenseSymMatrixSpace Class Reference

This is the matrix space for [DenseSymMatrix](#).

```
#include <IpDenseSymMatrix.hpp>
```

Inheritance diagram for Ipopt::DenseSymMatrixSpace:

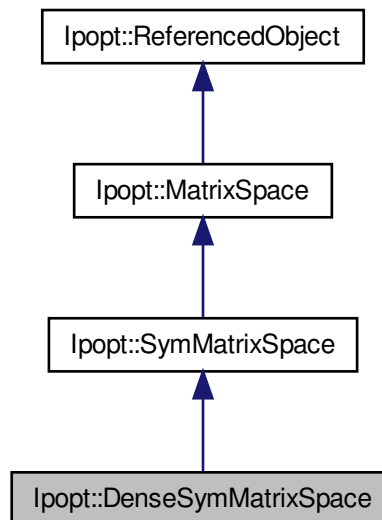

Public Member Functions

- [DenseSymMatrix](#) * [MakeNewDenseSymMatrix](#) () const
Method for creating a new matrix of this specific type.
- virtual [SymMatrix](#) * [MakeNewSymMatrix](#) () const
Overloaded MakeNew method for the [MatrixSpace](#) base class.

Constructors / Destructors

- [DenseSymMatrixSpace](#) (Index nDim)
Constructor for matrix space for DenseSymMatrices.
- [~DenseSymMatrixSpace](#) ()
Destructor.

3.29.1 Detailed Description

This is the matrix space for [DenseSymMatrix](#).

Definition at line 149 of file IpDenseSymMatrix.hpp.

3.29.2 Constructor & Destructor Documentation

3.29.2.1 Ipopt::DenseSymMatrixSpace::DenseSymMatrixSpace (Index nDim)

Constructor for matrix space for DenseSymMatrices.

Takes in dimension of the matrices.

3.29.3 Member Function Documentation

3.29.3.1 DenseSymMatrix* Ipopt::DenseSymMatrixSpace::MakeNewDenseSymMatrix () const [inline]

Method for creating a new matrix of this specific type.

Definition at line 165 of file IpDenseSymMatrix.hpp.

The documentation for this class was generated from the following file:


- IpDenseSymMatrix.hpp

3.30 Ipopt::DenseVector Class Reference

Dense [Vector](#) Implementation.

```
#include <IpDenseVector.hpp>
```

Inheritance diagram for Ipopt::DenseVector:

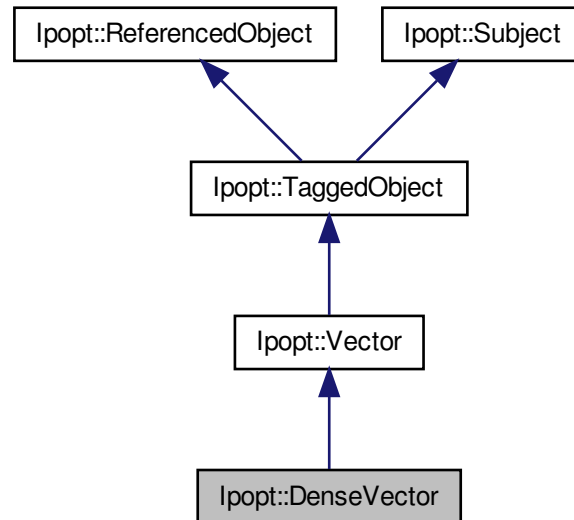

Public Member Functions

Constructors / Destructors

- [DenseVector](#) (const [DenseVectorSpace](#) *owner_space)
Default Constructor.
- virtual [~DenseVector](#) ()
Destructor.

Additional public methods not in Vector base class.

- [SmartPtr](#)< [DenseVector](#) > [MakeNewDenseVector](#) () const
Create a new [DenseVector](#) from same [VectorSpace](#).
- void [SetValues](#) (const Number *x)
Set elements in the vector to the Number array x.
- Number * [Values](#) ()
Obtain pointer to the internal Number array with vector elements with the intention to change the vector data (USE WITH CARE!).
- const Number * [Values](#) () const
Obtain pointer to the internal Number array with vector elements without the intention to change the vector data (USE WITH CARE!).
- const Number * [ExpandedValues](#) () const
The same as the const version of Values, but we ensure that we always return a valid array, even if IsHomogeneous returns true.
- Number * [ExpandedValues](#) ()
This is the same as Values, but we add it here so that ExpandedValues can also be used for the non-const case.
- bool [IsHomogeneous](#) () const

- Indicates if the vector is homogeneous (i.e., all entries have the value `Scalar()`)
- Number `Scalar()` const
Scalar value of all entries in a homogeneous vector.

Modifying subranges of the vector.

- void `CopyToPos` (Index Pos, const `Vector` &x)
Copy the data in x into the subrange of this vector starting at position Pos in this vector.
- void `CopyFromPos` (Index Pos, const `Vector` &x)
Copy a subrange of x, starting at Pos, into the full data of this vector.

Protected Member Functions

Overloaded methods from Vector base class

- virtual void `CopyImpl` (const `Vector` &x)
Copy the data of the vector x into this vector (DCOPY).
- virtual void `ScallImpl` (Number alpha)
Scales the vector by scalar alpha (DSCAL)
- virtual void `AxpyImpl` (Number alpha, const `Vector` &x)
Add the multiple alpha of vector x to this vector (DAXPY)
- virtual Number `DotImpl` (const `Vector` &x) const
Computes inner product of vector x with this (DDOT)
- virtual Number `Nrm2Impl` () const
Computes the 2-norm of this vector (DNRM2)
- virtual Number `AsumImpl` () const
Computes the 1-norm of this vector (DASUM)
- virtual Number `AmaxImpl` () const
Computes the max-norm of this vector (based on IDAMAX)
- virtual void `SetImpl` (Number value)
Set each element in the vector to the scalar alpha.
- virtual void `ElementWiseDivideImpl` (const `Vector` &x)
Element-wise division $y_i \leftarrow y_i / x_i$.
- virtual void `ElementWiseMultiplyImpl` (const `Vector` &x)
Element-wise multiplication $y_i \leftarrow y_i * x_i$.
- virtual void `ElementWiseMaxImpl` (const `Vector` &x)
Set entry to max of itself and the corresponding element in x.
- virtual void `ElementWiseMinImpl` (const `Vector` &x)
Set entry to min of itself and the corresponding element in x.
- virtual void `ElementWiseReciprocalImpl` ()
reciprocates the elements of the vector
- virtual void `ElementWiseAbsImpl` ()
take abs of the elements of the vector
- virtual void `ElementWiseSqrtImpl` ()
take square-root of the elements of the vector
- virtual void `ElementWiseSgnImpl` ()
Changes each entry in the vector to its sgn value.
- virtual void `AddScalarImpl` (Number scalar)
Add scalar to every component of the vector.
- virtual Number `MaxImpl` () const
Max value in the vector.
- virtual Number `MinImpl` () const

- virtual Number [SumImpl](#) () const
Min value in the vector.
- virtual Number [SumLogsImpl](#) () const
Computes the sum of the elements of vector.
- virtual Number [SumLogsImpl](#) () const
Computes the sum of the logs of the elements of vector.

Implemented specialized functions

- void [AddTwoVectorsImpl](#) (Number a, const [Vector](#) &v1, Number b, const [Vector](#) &v2, Number c)
*Add two vectors ($a * v1 + b * v2$).*
- Number [FracToBoundImpl](#) (const [Vector](#) &delta, Number tau) const
Fraction to the boundary parameter.
- void [AddVectorQuotientImpl](#) (Number a, const [Vector](#) &z, const [Vector](#) &s, Number c)
*Add the quotient of two vectors, $y = a * z/s + c * y$.*

Output methods

- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
Print the entire vector.
- void [PrintImplOffset](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix, Index offset) const

Additional Inherited Members

3.30.1 Detailed Description

Dense [Vector](#) Implementation.

This is the default [Vector](#) class in Ipopt. It stores vectors in contiguous Number arrays, unless the vector has the same value in all entries. In the latter case, we call the vector "homogeneous", and we store only the values that is repeated in all elements. If you want to obtain the values of vector, use the [IsHomogeneous\(\)](#) method to find out what status the vector is in, and then use either [Values\(\) const](#) or [Scalar\(\) const](#) methods to get the values. To set the values of a homogeneous method, use the Set method. To set the values of a non-homogeneous vector, use the SetValues method, or use the non-const Values method to get an array that you can overwrite. In the latter case, storage is ensured.

Definition at line 40 of file IpDenseVector.hpp.

3.30.2 Member Function Documentation

3.30.2.1 void Ipopt::DenseVector::SetValues (const Number * x)

Set elements in the vector to the Number array x.

3.30.2.2 Number * Ipopt::DenseVector::Values () [inline]

Obtain pointer to the internal Number array with vector elements with the intention to change the vector data (USE WITH CARE!).

This does not produce a copy, and lifetime is not guaranteed!.

Definition at line 393 of file IpDenseVector.hpp.

3.30.2.3 `const Number * Ipopt::DenseVector::Values ( ) const [inline]`

Obtain pointer to the internal Number array with vector elements without the intention to change the vector data (USE WITH CARE!).

This does not produce a copy, and lifetime is not guaranteed! IMPORTANT: If this method is currently homogeneous (i.e. `IsHomogeneous` returns true), then you cannot call this method. Instead, you need to use the [Scalar\(\)](#) method.

Definition at line 410 of file `IpDenseVector.hpp`.

3.30.2.4 `const Number* Ipopt::DenseVector::ExpandedValues ( ) const`

The same as the const version of `Values`, but we ensure that we always return a valid array, even if `IsHomogeneous` returns true.

3.30.2.5 `Number* Ipopt::DenseVector::ExpandedValues ( ) [inline]`

This is the same as `Values`, but we add it here so that `ExpandedValues` can also be used for the non-const case.

Definition at line 87 of file `IpDenseVector.hpp`.

3.30.2.6 `void Ipopt::DenseVector::CopyToPos ( Index Pos, const Vector & x )`

Copy the data in `x` into the subrange of this vector starting at position `Pos` in this vector.

Position count starts at 0.

3.30.2.7 `void Ipopt::DenseVector::CopyFromPos ( Index Pos, const Vector & x )`

Copy a subrange of `x`, starting at `Pos`, into the full data of this vector.

Position count starts at 0.

3.30.2.8 `virtual void Ipopt::DenseVector::CopyImpl ( const Vector & x ) [protected], [virtual]`

Copy the data of the vector `x` into this vector (DCOPY).

Implements [Ipopt::Vector](#).

3.30.2.9 `virtual void Ipopt::DenseVector::SetImpl ( Number value ) [protected], [virtual]`

Set each element in the vector to the scalar `alpha`.

Implements [Ipopt::Vector](#).

3.30.2.10 `virtual void Ipopt::DenseVector::ElementWiseDivideImpl ( const Vector & x ) [protected], [virtual]`

Element-wise division $y_i \leftarrow y_i / x_i$.

Implements [Ipopt::Vector](#).

3.30.2.11 `virtual void Ipopt::DenseVector::ElementWiseMultiplyImpl ( const Vector & x ) [protected], [virtual]`

Element-wise multiplication $y_i \leftarrow y_i * x_i$.

Implements [Ipopt::Vector](#).

3.30.2.12 `virtual void Ipopt::DenseVector::AddScalarImpl ( Number scalar ) [protected], [virtual]`

Add scalar to every component of the vector.

Implements [Ipopt::Vector](#).

3.30.2.13 void Ipopt::DenseVector::AddTwoVectorsImpl (Number *a*, const Vector & *v1*, Number *b*, const Vector & *v2*, Number *c*) [protected], [virtual]

Add two vectors ($a * v1 + b * v2$).

Result is stored in this vector.

Reimplemented from [Ipopt::Vector](#).

3.30.2.14 Number Ipopt::DenseVector::FracToBoundImpl (const Vector & *delta*, Number *tau*) const [protected], [virtual]

Fraction to the boundary parameter.

Reimplemented from [Ipopt::Vector](#).

3.30.2.15 void Ipopt::DenseVector::AddVectorQuotientImpl (Number *a*, const Vector & *z*, const Vector & *s*, Number *c*) [protected], [virtual]

Add the quotient of two vectors, $y = a * z/s + c * y$.

Reimplemented from [Ipopt::Vector](#).

The documentation for this class was generated from the following file:


- IpDenseVector.hpp

3.31 Ipopt::DenseVectorSpace Class Reference

This vectors space is the vector space for [DenseVector](#).

```
#include <IpDenseVector.hpp>
```

Inheritance diagram for Ipopt::DenseVectorSpace:

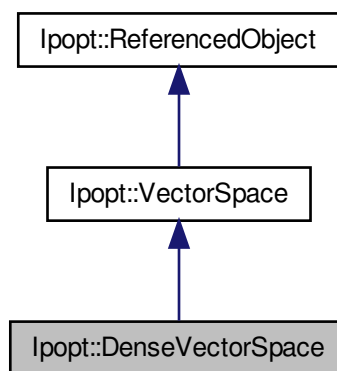

Public Member Functions

- [DenseVector](#) * [MakeNewDenseVector](#) () const
Method for creating a new vector of this specific type.
- virtual [Vector](#) * [MakeNew](#) () const
Instantiation of the generate MakeNew method for the [VectorSpace](#) base class.

Constructors/Destructors.

- [DenseVectorSpace](#) (Index dim)
Constructor, requires dimension of all vector for this [VectorSpace](#).
- [~DenseVectorSpace](#) ()
Destructor.

Methods called by DenseVector for memory management.

This could allow to have sophisticated memory management in the [VectorSpace](#).

- Number * [AllocateInternalStorage](#) () const
Allocate internal storage for the [DenseVector](#).
- void [FreeInternalStorage](#) (Number *values) const
Deallocate internal storage for the [DenseVector](#).

Methods for dealing with meta data on the vector

- bool [HasStringMetaData](#) (const std::string tag) const
Check if string meta exists for tag.
- bool [HasIntegerMetaData](#) (const std::string tag) const
Check if Integer meta exists for tag.
- bool [HasNumericMetaData](#) (const std::string tag) const
Check if Numeric meta exists for tag.
- const std::vector< std::string > & [GetStringMetaData](#) (const std::string &tag) const
Get meta data of type std::string by tag.
- const std::vector< Index > & [GetIntegerMetaData](#) (const std::string &tag) const
Get meta data of type Index by tag.
- const std::vector< Number > & [GetNumericMetaData](#) (const std::string &tag) const
Get meta data of type Number by tag.
- void [SetStringMetaData](#) (std::string tag, std::vector< std::string > meta_data)
Set meta data of type std::string by tag.
- void [SetIntegerMetaData](#) (std::string tag, std::vector< Index > meta_data)
Set meta data of type Index by tag.
- void [SetNumericMetaData](#) (std::string tag, std::vector< Number > meta_data)
Set meta data of type Number by tag.
- const StringMetaDataMapType & [GetStringMetaData](#) () const
Get map of meta data of type Number.
- const IntegerMetaDataMapType & [GetIntegerMetaData](#) () const
Get map of meta data of type Number.
- const NumericMetaDataMapType & [GetNumericMetaData](#) () const
Get map of meta data of type Number.

3.31.1 Detailed Description

This vectors space is the vector space for [DenseVector](#).

Definition at line 285 of file IpDenseVector.hpp.

3.31.2 Member Function Documentation

3.31.2.1 DenseVector* Ipopt::DenseVectorSpace::MakeNewDenseVector () const [inline]

Method for creating a new vector of this specific type.

Definition at line 305 of file IpDenseVector.hpp.

The documentation for this class was generated from the following file:


- IpDenseVector.hpp

3.32 Ipopt::DependentResult< T > Class Template Reference

Templated class which stores one entry for the CachedResult class.

```
#include <IpCachedResults.hpp>
```

Inheritance diagram for Ipopt::DependentResult< T >:

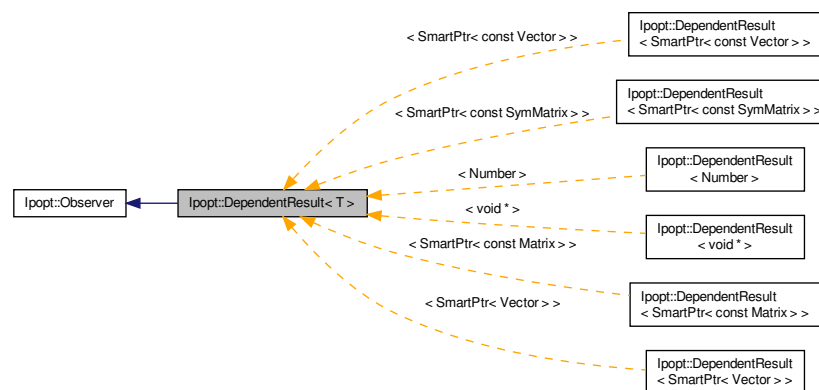

Public Member Functions

- bool [DependentsIdentical](#) (const std::vector< const [TaggedObject](#) * > &dependents, const std::vector< Number > &scalar_dependents) const
This method returns true if the dependencies provided to this function are identical to the ones stored with the [Dependent-Result](#).
- void [DebugPrint](#) () const
Print information about this [DependentResults](#).

Constructor, Destructors

- [DependentResult](#) (const T &result, const std::vector< const [TaggedObject](#) * > &dependents, const std::vector< Number > &scalar_dependents)
Constructor, given all information about the result.
- [~DependentResult](#) ()
Destructor.

Accessor method.

- bool [IsStale](#) () const
This returns true, if the [DependentResult](#) is no longer valid.
- void [Invalidate](#) ()
Invalidates the cached result.
- const T & [GetResult](#) () const
Returns the cached result.

Protected Member Functions

- virtual void [RecieveNotification](#) ([NotifyType](#) notify_type, const [Subject](#) *subject)
This method is overloading the pure virtual method from the [Observer](#) base class.

Additional Inherited Members**3.32.1 Detailed Description**

```
template<class T>class Ipopt::DependentResult< T >
```

Templated class which stores one entry for the [CachedResult](#) class.

It stores the result (of type T), together with its dependencies (vector of [TaggedObjects](#) and vector of [Numbers](#)). It also stores a priority.

Definition at line 257 of file [IpCachedResults.hpp](#).

3.32.2 Constructor & Destructor Documentation

3.32.2.1 `template<class T> Ipopt::DependentResult< T >::DependentResult ( const T & result, const std::vector< const TaggedObject * > & dependents, const std::vector< Number > & scalar_dependents )`

Constructor, given all information about the result.

Definition at line 348 of file [IpCachedResults.hpp](#).

3.32.2.2 `template<class T> Ipopt::DependentResult< T >::~~DependentResult ( )`

Destructor.

Definition at line 381 of file [IpCachedResults.hpp](#).

3.32.3 Member Function Documentation

3.32.3.1 `template<class T> bool Ipopt::DependentResult< T >::IsStale ( ) const`

This returns true, if the [DependentResult](#) is no longer valid.

Definition at line 393 of file [IpCachedResults.hpp](#).

3.32.3.2 `template<class T> void Ipopt::DependentResult< T >::Invalidate ( )`

Invalidates the cached result.

Definition at line 399 of file [IpCachedResults.hpp](#).

3.32.3.3 `template<class T> const T & Ipopt::DependentResult< T >::GetResult ( ) const`

Returns the cached result.

Definition at line 456 of file IpCachedResults.hpp.

3.32.3.4 `template<class T> void Ipopt::DependentResult< T >::DebugPrint ( ) const`

Print information about this DependentResults.

Definition at line 467 of file IpCachedResults.hpp.

3.32.3.5 `template<class T> void Ipopt::DependentResult< T >::RecieveNotification ( NotifyType notify_type, const Subject * subject ) [protected], [virtual]`

This method is overloading the pure virtual method from the [Observer](#) base class.

This method is called when a [Subject](#) registered for this [Observer](#) sends a notification. In this particular case, if this method is called with `notify_type==NT_Changed` or `NT_BeingDeleted`, then this results is marked as stale.

Implements [Ipopt::Observer](#).

Definition at line 405 of file IpCachedResults.hpp.

The documentation for this class was generated from the following file:


- IpCachedResults.hpp

3.33 Ipopt::DiagMatrix Class Reference

Class for diagonal matrices.

```
#include <IpDiagMatrix.hpp>
```

Inheritance diagram for Ipopt::DiagMatrix:

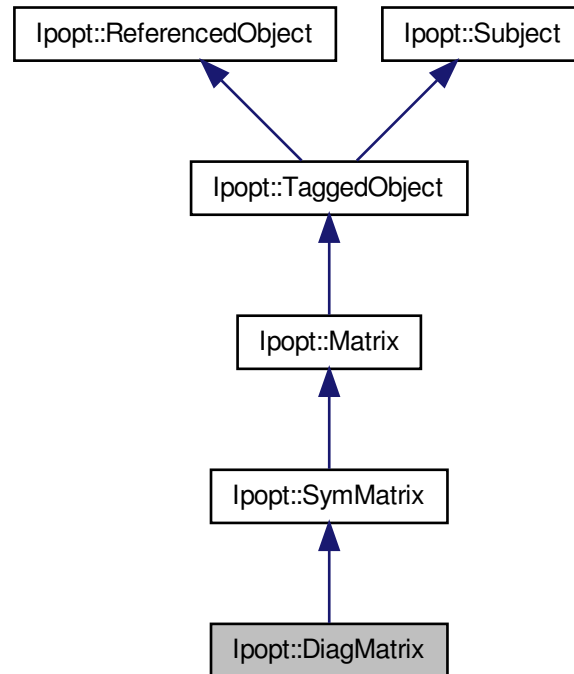

Public Member Functions

- void [SetDiag](#) (const [Vector](#) &diag)
Method for setting the diagonal elements (as a [Vector](#)).
- [SmartPtr](#)< const [Vector](#) > [GetDiag](#) () const
Method for setting the diagonal elements.

Constructors / Destructors

- [DiagMatrix](#) (const [SymMatrixSpace](#) *owner_space)
Constructor, given the corresponding matrix space.
- [~DiagMatrix](#) ()
Destructor.

Protected Member Functions

Methods overloaded from matrix

- virtual void [MultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix-vector multiply.
- virtual bool [IsValidNumbersImpl](#) () const

- *Method for determining if all stored numbers are valid (i.e., no Inf or Nan).*
- virtual void [ComputeRowAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const
Compute the max-norm of the rows in the matrix.
- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
Print detailed information about the matrix.

Additional Inherited Members

3.33.1 Detailed Description

Class for diagonal matrices.

The diagonal is stored as a [Vector](#).

Definition at line 20 of file IpDiagMatrix.hpp.

3.33.2 Constructor & Destructor Documentation

3.33.2.1 Ipopt::DiagMatrix::DiagMatrix (const SymMatrixSpace * owner_space)

Constructor, given the corresponding matrix space.

3.33.3 Member Function Documentation

3.33.3.1 void Ipopt::DiagMatrix::SetDiag (const Vector & diag) [inline]

Method for setting the diagonal elements (as a [Vector](#)).

Definition at line 35 of file IpDiagMatrix.hpp.

3.33.3.2 SmartPtr<const Vector> Ipopt::DiagMatrix::GetDiag () const [inline]

Method for setting the diagonal elements.

Definition at line 41 of file IpDiagMatrix.hpp.

3.33.3.3 virtual void Ipopt::DiagMatrix::MultVectorImpl (Number alpha, const Vector & x, Number beta, Vector & y) const [protected], [virtual]

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.33.3.4 virtual bool Ipopt::DiagMatrix::IsValidNumbersImpl () const [protected], [virtual]

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Reimplemented from [Ipopt::Matrix](#).

3.33.3.5 virtual void Ipopt::DiagMatrix::ComputeRowAMaxImpl (Vector & rows_norms, bool init) const [protected], [virtual]

Compute the max-norm of the rows in the matrix.

The result is stored in `rows_norms`. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.33.3.6 `virtual void Ipopt::DiagMatrix::PrintImpl ( const Journalist & jnlst, EJournalLevel level, EJournalCategory category, const std::string & name, Index indent, const std::string & prefix ) const` [protected], [virtual]

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

The documentation for this class was generated from the following file:


- `IpDiagMatrix.hpp`

3.34 Ipopt::DiagMatrixSpace Class Reference

This is the matrix space for [DiagMatrix](#).

```
#include <IpDiagMatrix.hpp>
```

Inheritance diagram for `Ipopt::DiagMatrixSpace`:

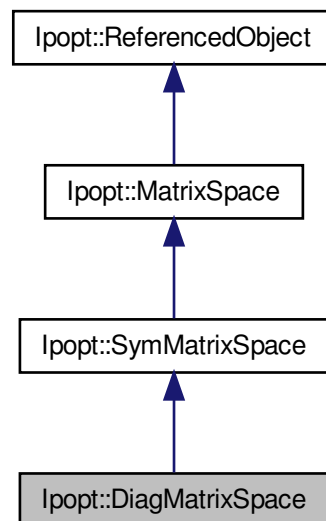

Public Member Functions

- `virtual SymMatrix * MakeNewSymMatrix () const`
Overloaded *MakeNew* method for the [SymMatrixSpace](#) base class.
- `DiagMatrix * MakeNewDiagMatrix () const`
Method for creating a new matrix of this specific type.

Constructors / Destructors

- [DiagMatrixSpace](#) (Index dim)
Constructor, given the dimension of the matrix.
- virtual [~DiagMatrixSpace](#) ()
Destructor.

3.34.1 Detailed Description

This is the matrix space for [DiagMatrix](#).

Definition at line 90 of file IpDiagMatrix.hpp.

3.34.2 Constructor & Destructor Documentation**3.34.2.1 Ipopt::DiagMatrixSpace::DiagMatrixSpace (Index *dim*) [inline]**

Constructor, given the dimension of the matrix.

Definition at line 96 of file IpDiagMatrix.hpp.

3.34.3 Member Function Documentation**3.34.3.1 DiagMatrix* Ipopt::DiagMatrixSpace::MakeNewDiagMatrix () const [inline]**

Method for creating a new matrix of this specific type.

Definition at line 114 of file IpDiagMatrix.hpp.

The documentation for this class was generated from the following file:


- IpDiagMatrix.hpp

3.35 Ipopt::EqMultiplierCalculator Class Reference

Base Class for objects that compute estimates for the equality constraint multipliers `y_c` and `y_d`.

```
#include <IpEqMultCalculator.hpp>
```

Inheritance diagram for Ipopt::EqMultiplierCalculator:

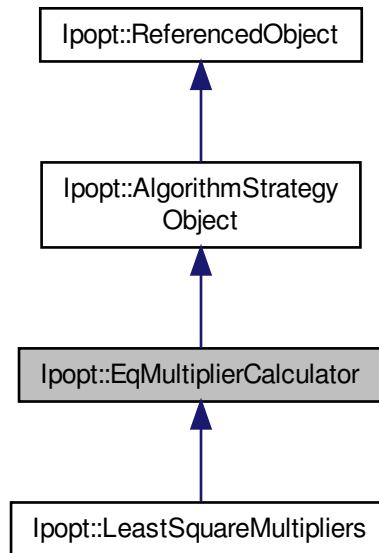

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [CalculateMultipliers](#) ([Vector](#) &y_c, [Vector](#) &y_d)=0
This method computes the estimates for y_c and y_d at the current point.

Constructors/Destructors

- [EqMultiplierCalculator](#) ()
Default Constructor.
- virtual [~EqMultiplierCalculator](#) ()
Default destructor.

Additional Inherited Members

3.35.1 Detailed Description

Base Class for objects that compute estimates for the equality constraint multipliers y_c and y_d.

For example, this is the base class for objects for computing least square multipliers or coordinate multipliers.

Definition at line 21 of file IpEqMultCalculator.hpp.

3.35.2 Constructor & Destructor Documentation

3.35.2.1 Ipopt::EqMultiplierCalculator::EqMultiplierCalculator () [inline]

Default Constructor.

Definition at line 27 of file IpEqMultCalculator.hpp.

3.35.3 Member Function Documentation

3.35.3.1 virtual bool Ipopt::EqMultiplierCalculator::CalculateMultipliers (Vector & y_c, Vector & y_d) [pure virtual]

This method computes the estimates for y_c and y_d at the current point.

If the estimates cannot be computed (e.g. some linear system is singular), the return value of this method is false.

Implemented in [Ipopt::LeastSquareMultipliers](#).

The documentation for this class was generated from the following file:


- IpEqMultCalculator.hpp

3.36 Ipopt::EquilibrationScaling Class Reference

This class does problem scaling by setting the scaling parameters based on the maximum of the gradient at the user provided initial point.

```
#include <IpEquilibrationScaling.hpp>
```

Inheritance diagram for Ipopt::EquilibrationScaling:

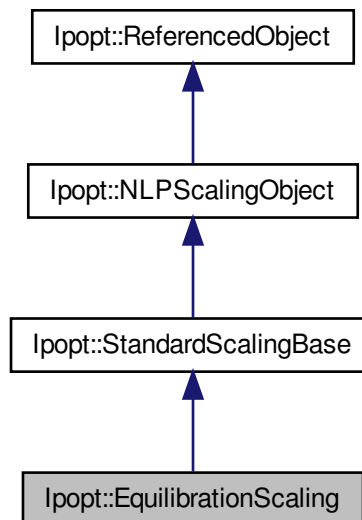

Public Member Functions

Constructors/Destructors

- **EquilibrationScaling** (const SmartPtr< NLP > &nlp)
- virtual ~EquilibrationScaling ()
Default destructor.

Static Public Member Functions

- static void RegisterOptions (const SmartPtr< RegisteredOptions > &options)
Methods for IpoptType.

Protected Member Functions

- bool InitializeImpl (const OptionsList &options, const std::string &prefix)
Initialize the object from the options.
- virtual void DetermineScalingParametersImpl (const SmartPtr< const VectorSpace > x_space, const SmartPtr< const VectorSpace > c_space, const SmartPtr< const VectorSpace > d_space, const SmartPtr< const MatrixSpace > jac_c_space, const SmartPtr< const MatrixSpace > jac_d_space, const SmartPtr< const SymMatrixSpace > h_space, const Matrix &Px_L, const Vector &x_L, const Matrix &Px_U, const Vector &x_U, Number &df, SmartPtr< Vector > &dx, SmartPtr< Vector > &dc, SmartPtr< Vector > &dd)
This is the method that has to be overloaded by a particular scaling method that somehow computes the scaling vectors dx, dc, and dd.

3.36.1 Detailed Description

This class does problem scaling by setting the scaling parameters based on the maximum of the gradient at the user provided initial point.

Definition at line 21 of file IpEquilibrationScaling.hpp.

3.36.2 Member Function Documentation

- 3.36.2.1 static void Ipopt::EquilibrationScaling::RegisterOptions (const SmartPtr< RegisteredOptions > & options)
[static]

Methods for IpoptType.

Register the options for this class

- 3.36.2.2 virtual void Ipopt::EquilibrationScaling::DetermineScalingParametersImpl (const SmartPtr< const VectorSpace > x_space, const SmartPtr< const VectorSpace > c_space, const SmartPtr< const VectorSpace > d_space, const SmartPtr< const MatrixSpace > jac_c_space, const SmartPtr< const MatrixSpace > jac_d_space, const SmartPtr< const SymMatrixSpace > h_space, const Matrix & Px_L, const Vector & x_L, const Matrix & Px_U, const Vector & x_U, Number & df, SmartPtr< Vector > & dx, SmartPtr< Vector > & dc, SmartPtr< Vector > & dd) [protected], [virtual]

This is the method that has to be overloaded by a particular scaling method that somehow computes the scaling vectors dx, dc, and dd.

The pointers to those vectors can be NULL, in which case no scaling for that item will be done later.

Implements [Ipopt::StandardScalingBase](#).

The documentation for this class was generated from the following file:


- IpEquilibrationScaling.hpp

3.37 Ipopt::ExactHessianUpdater Class Reference

Implementation of the [HessianUpdater](#) for the use of exact second derivatives.

```
#include <IpExactHessianUpdater.hpp>
```

Inheritance diagram for Ipopt::ExactHessianUpdater:

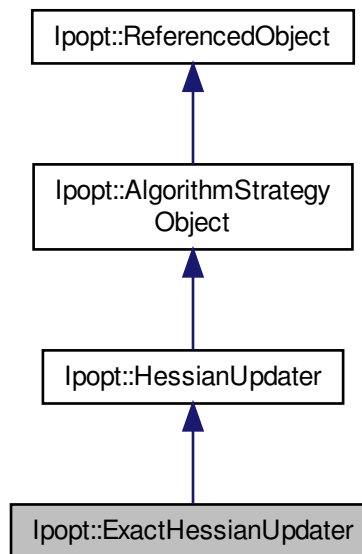

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual void [UpdateHessian](#) ()
Update the Hessian based on the current information in IpData.

Constructors/Destructors

- [ExactHessianUpdater](#) ()
Default Constructor.
- virtual [~ExactHessianUpdater](#) ()
Default destructor.

Additional Inherited Members

3.37.1 Detailed Description

Implementation of the [HessianUpdater](#) for the use of exact second derivatives.

Definition at line 20 of file IpExactHessianUpdater.hpp.

The documentation for this class was generated from the following file:


- IpExactHessianUpdater.hpp

3.38 Ipopt::ExpandedMultiVectorMatrix Class Reference

Class for Matrices with few rows that consists of Vectors, together with a premultiplied Expansion matrix.

```
#include <IpExpandedMultiVectorMatrix.hpp>
```

Inheritance diagram for Ipopt::ExpandedMultiVectorMatrix:

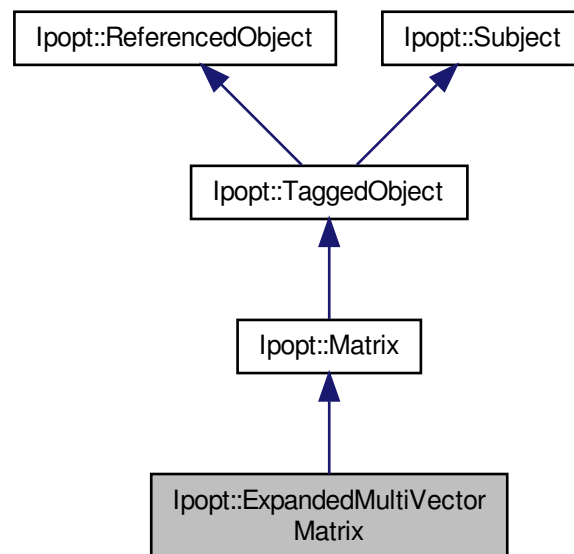

Public Member Functions

- void [SetVector](#) (Index i, [SmartPtr](#)< const [Vector](#) > vec)
Set a particular [Vector](#) at a given row position, replacing another vector if there has been one.
- [SmartPtr](#)< const [Vector](#) > [GetVector](#) (Index i) const
Get a [Vector](#) in a particular row as a const [Vector](#).
- [SmartPtr](#)< const [VectorSpace](#) > [RowVectorSpace](#) () const
[Vector](#) space for the rows.

- `SmartPtr< const ExpandedMultiVectorMatrixSpace > ExpandedMultiVectorMatrixOwnerSpace () const`
Return the *ExpandedMultiVectorMatrixSpace*.
- `SmartPtr< const ExpansionMatrix > GetExpansionMatrix () const`
Return the *Expansion matrix*.

Constructors / Destructors

- `ExpandedMultiVectorMatrix (const ExpandedMultiVectorMatrixSpace *owner_space)`
Constructor, taking the *owner_space*.
- `virtual ~ExpandedMultiVectorMatrix ()`
Destructor.

Protected Member Functions

Overloaded methods from Matrix base class

- `virtual void MultVectorImpl (Number alpha, const Vector &x, Number beta, Vector &y) const`
Matrix-vector multiply.
- `virtual void TransMultVectorImpl (Number alpha, const Vector &x, Number beta, Vector &y) const`
Matrix(transpose) vector multiply.
- `virtual bool HasValidNumbersImpl () const`
Method for determining if all stored numbers are valid (i.e., no Inf or Nan).
- `virtual void ComputeRowAMaxImpl (Vector &rows_norms, bool init) const`
Compute the max-norm of the rows in the matrix.
- `virtual void ComputeColAMaxImpl (Vector &cols_norms, bool init) const`
Compute the max-norm of the columns in the matrix.
- `virtual void PrintImpl (const Journalist &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const`
Print detailed information about the matrix.

Additional Inherited Members

3.38.1 Detailed Description

Class for Matrices with few rows that consists of Vectors, together with a premultiplied Expansion matrix.

So, the matrix is $V^T P^T$. If P is NULL, it is assumed to be the identity matrix. If a row vector of V is NULL, it is assumed to be all zero. This is used to construct the KKT system with low-rank Hessian approximation.

Definition at line 29 of file `IpExpandedMultiVectorMatrix.hpp`.

3.38.2 Member Function Documentation

3.38.2.1 `void Ipopt::ExpandedMultiVectorMatrix::SetVector ( Index i, SmartPtr< const Vector > vec )`

Set a particular *Vector* at a given row position, replacing another vector if there has been one.

3.38.2.2 `SmartPtr< const ExpansionMatrix > Ipopt::ExpandedMultiVectorMatrix::GetExpansionMatrix ( ) const` [inline]

Return the *Expansion matrix*.

If NULL, there is no expansion, the vector is used as is.

Definition at line 182 of file `IpExpandedMultiVectorMatrix.hpp`.

3.38.2.3 `virtual void Ipopt::ExpandedMultiVectorMatrix::MultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const` [protected], [virtual]

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.38.2.4 `virtual void Ipopt::ExpandedMultiVectorMatrix::TransMultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const` [protected], [virtual]

Matrix(transpose) vector multiply.

Computes $y = \alpha * \text{Matrix}^T * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.38.2.5 `virtual bool Ipopt::ExpandedMultiVectorMatrix::IsValidNumbersImpl ( ) const` [protected], [virtual]

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Reimplemented from [Ipopt::Matrix](#).

3.38.2.6 `virtual void Ipopt::ExpandedMultiVectorMatrix::ComputeRowAMaxImpl ( Vector & rows_norms, bool init ) const` [protected], [virtual]

Compute the max-norm of the rows in the matrix.

The result is stored in *rows_norms*. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.38.2.7 `virtual void Ipopt::ExpandedMultiVectorMatrix::ComputeColAMaxImpl ( Vector & cols_norms, bool init ) const` [protected], [virtual]

Compute the max-norm of the columns in the matrix.

The result is stored in *cols_norms*. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.38.2.8 `virtual void Ipopt::ExpandedMultiVectorMatrix::PrintImpl ( const Journalist & jnlst, EJournalLevel level, EJournalCategory category, const std::string & name, Index indent, const std::string & prefix ) const` [protected], [virtual]

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

The documentation for this class was generated from the following file:


- `IpExpandedMultiVectorMatrix.hpp`

3.39 Ipopt::ExpandedMultiVectorMatrixSpace Class Reference

This is the matrix space for [ExpandedMultiVectorMatrix](#).

```
#include <IpExpandedMultiVectorMatrix.hpp>
```

Inheritance diagram for Ipopt::ExpandedMultiVectorMatrixSpace:

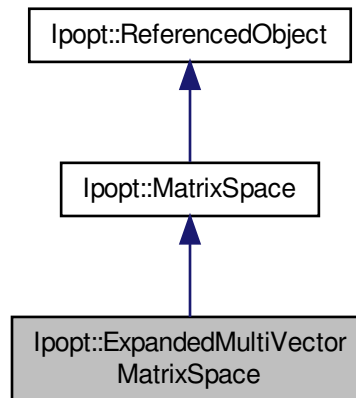

Public Member Functions

- [ExpandedMultiVectorMatrix](#) * [MakeNewExpandedMultiVectorMatrix](#) () const
Method for creating a new matrix of this specific type.
- virtual [Matrix](#) * [MakeNew](#) () const
Overloaded MakeNew method for the [MatrixSpace](#) base class.
- [SmartPtr](#)< const [VectorSpace](#) > [RowVectorSpace](#) () const
Accessor method for the [VectorSpace](#) for the rows.

Constructors / Destructors

- [ExpandedMultiVectorMatrixSpace](#) (Index nrows, const [VectorSpace](#) &vec_space, [SmartPtr](#)< const [ExpansionMatrix](#) > exp_matrix)
Constructor, given the number of rows (i.e., Vectors to be stored) and given the [VectorSpace](#) for the Vectors.
- virtual [~ExpandedMultiVectorMatrixSpace](#) ()
Destructor.

3.39.1 Detailed Description

This is the matrix space for [ExpandedMultiVectorMatrix](#).

Definition at line 123 of file `IpExpandedMultiVectorMatrix.hpp`.

3.39.2 Member Function Documentation

3.39.2.1 [ExpandedMultiVectorMatrix](#)* Ipopt::ExpandedMultiVectorMatrixSpace::MakeNewExpandedMultiVectorMatrix () const [inline]

Method for creating a new matrix of this specific type.

Definition at line 140 of file IpExpandedMultiVectorMatrix.hpp.

The documentation for this class was generated from the following file:


- IpExpandedMultiVectorMatrix.hpp

3.40 Ipopt::ExpansionMatrix Class Reference

Class for expansion/projection matrices.

```
#include <IpExpansionMatrix.hpp>
```

Inheritance diagram for Ipopt::ExpansionMatrix:

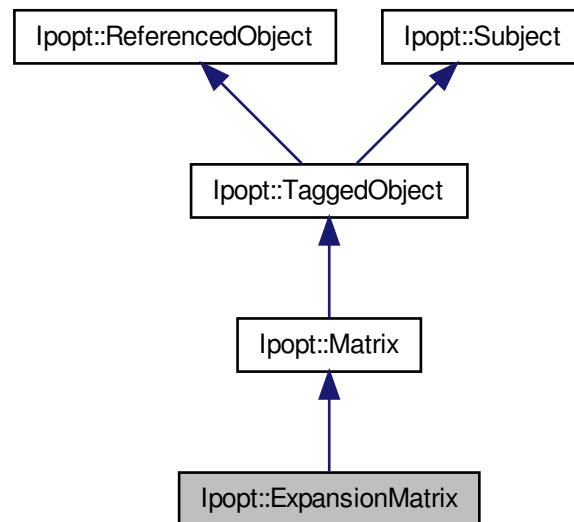

Public Member Functions

- const Index * [ExpandedPosIndices](#) () const
Return the vector of indices marking the expanded position.
- const Index * [CompressedPosIndices](#) () const
Return the vector of indices marking the compressed position.

Constructors / Destructors

- [ExpansionMatrix](#) (const [ExpansionMatrixSpace](#) *owner_space)
Constructor, taking the owner_space.
- [~ExpansionMatrix](#) ()
Destructor.

Protected Member Functions

Overloaded methods from Matrix base class

- virtual void [MultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix-vector multiply.
- virtual void [TransMultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix(transpose) vector multiply.
- virtual void [AddMSinvZImpl](#) (Number alpha, const [Vector](#) &S, const [Vector](#) &Z, [Vector](#) &X) const
 $X = \text{beta} * X + \text{alpha} * (\text{Matrix } S^{-1} \{ -1 \} Z).$
- virtual void [SinvBlrmZMTdBrlImpl](#) (Number alpha, const [Vector](#) &S, const [Vector](#) &R, const [Vector](#) &Z, const [Vector](#) &D, [Vector](#) &X) const
 $X = S^{-1} \{ -1 \} (r + \text{alpha} * Z * M^{\wedge} Td).$
- virtual void [ComputeRowAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const
Compute the max-norm of the rows in the matrix.
- virtual void [ComputeColAMaxImpl](#) ([Vector](#) &cols_norms, bool init) const
Compute the max-norm of the columns in the matrix.
- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
Print detailed information about the matrix.

Additional Inherited Members

3.40.1 Detailed Description

Class for expansion/projection matrices.

These matrices allow to lift a vector to a vector with larger dimension, keeping some elements of the larger vector zero. This operation is achieved by the MultVector operation. The transpose operation then filters some elements from a large vector into a smaller vector.

Definition at line 27 of file IpExpansionMatrix.hpp.

3.40.2 Member Function Documentation

3.40.2.1 const Index * Ipopt::ExpansionMatrix::ExpandedPosIndices () const [inline]

Return the vector of indices marking the expanded position.

The result is the Index array (of length NSmallVec=[NCols\(\)](#)) that stores the mapping from the small vector to the large vector. For each element $i=0, \dots, \text{NSmallVec}$ in the small vector, [ExpandedPosIndices\(\)\[i\]](#) give the corresponding index in the large vector.

Definition at line 200 of file IpExpansionMatrix.hpp.

3.40.2.2 const Index * Ipopt::ExpansionMatrix::CompressedPosIndices () const [inline]

Return the vector of indices marking the compressed position.

The result is the Index array (of length NLargeVec=[NRows\(\)](#)) that stores the mapping from the large vector to the small vector. For each element $i=0, \dots, \text{NLargeVec}$ in the large vector, [CompressedPosIndices\(\)\[i\]](#) gives the corresponding index in the small vector, unless [CompressedPosIndices\(\)\[i\]](#) is negative.

Definition at line 206 of file IpExpansionMatrix.hpp.

3.40.2.3 `virtual void Ipopt::ExpansionMatrix::MultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const` `[protected], [virtual]`

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.40.2.4 `virtual void Ipopt::ExpansionMatrix::TransMultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const` `[protected], [virtual]`

Matrix(transpose) vector multiply.

Computes $y = \alpha * \text{Matrix}^T * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.40.2.5 `virtual void Ipopt::ExpansionMatrix::AddMSinvZImpl ( Number alpha, const Vector & S, const Vector & Z, Vector & X ) const` `[protected], [virtual]`

$X = \beta * X + \alpha * (\text{Matrix } S^{-1} Z)$.

Specialized implementation.

Reimplemented from [Ipopt::Matrix](#).

3.40.2.6 `virtual void Ipopt::ExpansionMatrix::SinvBlrmZMTdBrImpl ( Number alpha, const Vector & S, const Vector & R, const Vector & Z, const Vector & D, Vector & X ) const` `[protected], [virtual]`

$X = S^{-1} (r + \alpha * Z * M^T d)$.

Specialized implementation.

Reimplemented from [Ipopt::Matrix](#).

3.40.2.7 `virtual void Ipopt::ExpansionMatrix::ComputeRowAMaxImpl ( Vector & rows_norms, bool init ) const` `[protected], [virtual]`

Compute the max-norm of the rows in the matrix.

The result is stored in `rows_norms`. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.40.2.8 `virtual void Ipopt::ExpansionMatrix::ComputeColAMaxImpl ( Vector & cols_norms, bool init ) const` `[protected], [virtual]`

Compute the max-norm of the columns in the matrix.

The result is stored in `cols_norms`. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.40.2.9 `virtual void Ipopt::ExpansionMatrix::PrintImpl ( const Journalist & jnlst, EJournalLevel level, EJournalCategory category, const std::string & name, Index indent, const std::string & prefix ) const` `[inline], [protected], [virtual]`

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

Definition at line 85 of file `IpExpansionMatrix.hpp`.

The documentation for this class was generated from the following file:


- IpExpansionMatrix.hpp

3.41 Ipopt::ExpansionMatrixSpace Class Reference

This is the matrix space for [ExpansionMatrix](#).

```
#include <IpExpansionMatrix.hpp>
```

Inheritance diagram for Ipopt::ExpansionMatrixSpace:

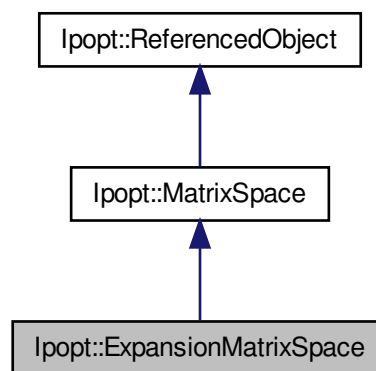

Public Member Functions

- [ExpansionMatrix](#) * [MakeNewExpansionMatrix](#) () const
Method for creating a new matrix of this specific type.
- virtual [Matrix](#) * [MakeNew](#) () const
Overloaded MakeNew method for the [MatrixSpace](#) base class.
- const Index * [ExpandedPosIndices](#) () const
Accessor Method to obtain the Index array (of length `NSmallVec=NCols()`) that stores the mapping from the small vector to the large vector.
- const Index * [CompressedPosIndices](#) () const
Accessor Method to obtain the Index array (of length `NLargeVec=NRows()`) that stores the mapping from the large vector to the small vector.

Constructors / Destructors

- [ExpansionMatrixSpace](#) (Index NLargeVec, Index NSmallVec, const Index *ExpPos, const int offset=0)
Constructor, given the list of elements of the large vector (of size NLargeVec) to be filtered into the small vector (of size NSmallVec).
- [~ExpansionMatrixSpace](#) ()
Destructor.

3.41.1 Detailed Description

This is the matrix space for [ExpansionMatrix](#).

Definition at line 132 of file IpExpansionMatrix.hpp.

3.41.2 Constructor & Destructor Documentation

3.41.2.1 Ipopt::ExpansionMatrixSpace::ExpansionMatrixSpace (Index *NLargeVec*, Index *NSmallVec*, const Index * *ExpPos*, const int *offset* = 0)

Constructor, given the list of elements of the large vector (of size *NLargeVec*) to be filtered into the small vector (of size *NSmallVec*).

For each $i=0..NSmallVec-1$ the i -th element of the small vector will be put into the *ExpPos*[i] position of the large vector. The position counting in the vector is assumed to start at 0 (C-like array notation).

3.41.3 Member Function Documentation

3.41.3.1 ExpansionMatrix* Ipopt::ExpansionMatrixSpace::MakeNewExpansionMatrix () const [inline]

Method for creating a new matrix of this specific type.

Definition at line 158 of file IpExpansionMatrix.hpp.

3.41.3.2 const Index* Ipopt::ExpansionMatrixSpace::ExpandedPosIndices () const [inline]

Accessor Method to obtain the Index array (of length *NSmallVec*=[NCols\(\)](#)) that stores the mapping from the small vector to the large vector.

For each element $i=0,..,NSmallVec$ in the small vector, [ExpandedPosIndices\(\)](#)[i] give the corresponding index in the large vector.

Definition at line 176 of file IpExpansionMatrix.hpp.

3.41.3.3 const Index* Ipopt::ExpansionMatrixSpace::CompressedPosIndices () const [inline]

Accessor Method to obtain the Index array (of length *NLargeVec*=[NRows\(\)](#)) that stores the mapping from the large vector to the small vector.

For each element $i=0,..,NLargeVec$ in the large vector, [CompressedPosIndices\(\)](#)[i] gives the corresponding index in the small vector, unless [CompressedPosIndices\(\)](#)[i] is negative.

Definition at line 188 of file IpExpansionMatrix.hpp.

The documentation for this class was generated from the following file:


- IpExpansionMatrix.hpp

3.42 Ipopt::FileJournal Class Reference

[FileJournal](#) class.

```
#include <IpJournalist.hpp>
```

Inheritance diagram for Ipopt::FileJournal:

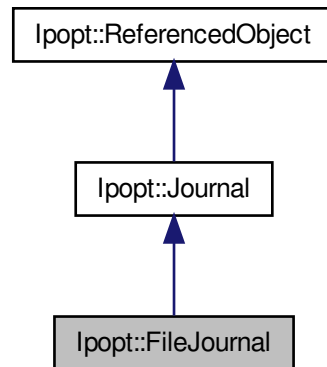

Public Member Functions

- [FileJournal](#) (const std::string &name, EJournalLevel default_level)
Constructor.
- virtual [~FileJournal](#) ()
Destructor.
- virtual bool [Open](#) (const char *fname)
Open a new file for the output location.

Protected Member Functions

Implementation version of Print methods - Overloaded from

[Journal](#) base class.

- virtual void [PrintImpl](#) (EJournalCategory category, EJournalLevel level, const char *str)
Print to the designated output location.
- virtual void [PrintfImpl](#) (EJournalCategory category, EJournalLevel level, const char *pformat, va_list ap)
Printf to the designated output location.
- virtual void [FlushBufferImpl](#) ()
Flush output buffer.

3.42.1 Detailed Description

[FileJournal](#) class.

This is a particular [Journal](#) implementation that writes to a file for output. It can write to (stdout, stderr, or disk) by using "stdout" and "stderr" as filenames.

Definition at line 379 of file IpJournalist.hpp.

3.42.2 Constructor & Destructor Documentation

3.42.2.1 Ipopt::FileJournal::FileJournal (const std::string & *name*, EJournalLevel *default_level*)

Constructor.

3.42.2.2 virtual Ipopt::FileJournal::~FileJournal () [virtual]

Destructor.

3.42.3 Member Function Documentation

3.42.3.1 virtual bool Ipopt::FileJournal::Open (const char * *fname*) [virtual]

Open a new file for the output location.

Special Names: stdout means stdout, : stderr means stderr.

Return code is false only if the file with the given name could not be opened.

3.42.3.2 virtual void Ipopt::FileJournal::FlushBufferImpl () [protected],[virtual]

Flush output buffer.

Implements [Ipopt::Journal](#).

The documentation for this class was generated from the following file:

- IpJournalist.hpp

3.43 Ipopt::Filter Class Reference

Class for the filter.

```
#include <IpFilter.hpp>
```

Public Member Functions

- bool [Acceptable](#) (std::vector< Number > vals) const
Check acceptability of given coordinates with respect to the filter.
- void [AddEntry](#) (std::vector< Number > vals, Index iteration)
Add filter entry for given coordinates.
- void [Clear](#) ()
Delete all filter entries.
- void [Print](#) (const [Journalist](#) &jnlst)
Print current filter entries.

Constructors/Destructors

- [Filter](#) (Index dim)
Default Constructor.
- [~Filter](#) ()
Default Destructor.

Wrappers for 2-dimensional filter.

- bool **Acceptable** (Number val1, Number val2) const
- void **AddEntry** (Number val1, Number val2, Index iteration)

3.43.1 Detailed Description

Class for the filter.

This class contains all filter entries. The entries are stored as the corner point, including the margin.

Definition at line 111 of file IpFilter.hpp.

3.43.2 Member Function Documentation**3.43.2.1 bool Ipopt::Filter::Acceptable (std::vector< Number > vals) const**

Check acceptability of given coordinates with respect to the filter.

Returns true, if pair is acceptable

3.43.2.2 void Ipopt::Filter::AddEntry (std::vector< Number > vals, Index iteration)

Add filter entry for given coordinates.

This will also delete all dominated entries in the current filter.

The documentation for this class was generated from the following file:

- IpFilter.hpp

3.44 Ipopt::FilterEntry Class Reference

Class for one filter entry.

```
#include <IpFilter.hpp>
```

Public Member Functions

- bool **Acceptable** (std::vector< Number > vals) const
Check acceptability of pair (phi,theta) with respect to this filter entry.
- bool **Dominated** (std::vector< Number > vals) const
Check if this entry is dominated by given coordinates.

Constructors/Destructors

- **FilterEntry** (std::vector< Number > vals, Index iter)
Constructor with the two components and the current iteration count.
- **~FilterEntry** ()
Default Destructor.

Accessor functions

- Number **val** (Index i) const
- Index **iter** () const

3.44.1 Detailed Description

Class for one filter entry.

Definition at line 21 of file IpFilter.hpp.

3.44.2 Member Function Documentation

3.44.2.1 bool Ipopt::FilterEntry::Acceptable (std::vector< Number > vals) const [inline]

Check acceptability of pair (phi,theta) with respect to this filter entry.

Returns true, if pair is acceptable.

Definition at line 36 of file IpFilter.hpp.

3.44.2.2 bool Ipopt::FilterEntry::Dominated (std::vector< Number > vals) const [inline]

Check if this entry is dominated by given coordinates.

Returns true, if this entry is dominated.

Definition at line 56 of file IpFilter.hpp.

The documentation for this class was generated from the following file:


- IpFilter.hpp

3.45 Ipopt::FilterLSAcceptor Class Reference

[Filter](#) line search.

```
#include <IpFilterLSAcceptor.hpp>
```

Inheritance diagram for Ipopt::FilterLSAcceptor:

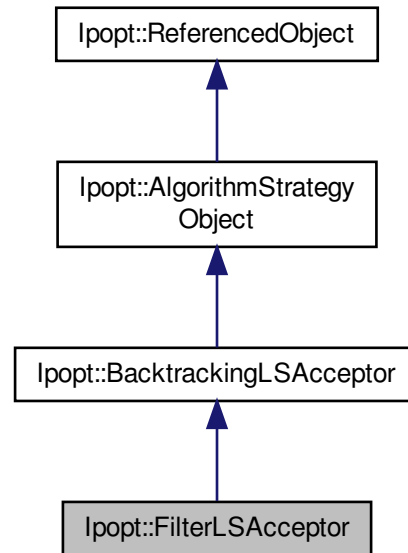

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
InitializeImpl - overloaded from [AlgorithmStrategyObject](#).
- virtual void [Reset](#) ()
Reset the acceptor.
- virtual void [InitThisLineSearch](#) (bool in_watchdog)
Initialization for the next line search.
- virtual void [PrepareRestoPhaseStart](#) ()
Method that is called before the restoration phase is called.
- virtual Number [CalculateAlphaMin](#) ()
Method returning the lower bound on the trial step sizes.
- virtual bool [CheckAcceptabilityOfTrialPoint](#) (Number alpha_primal)
Method for checking if current trial point is acceptable.
- virtual bool [TrySecondOrderCorrection](#) (Number alpha_primal_test, Number &alpha_primal, [SmartPtr](#)< [IteratesVector](#) > &actual_delta)
Try a second order correction for the constraints.
- virtual bool [TryCorrector](#) (Number alpha_primal_test, Number &alpha_primal, [SmartPtr](#)< [IteratesVector](#) > &actual_delta)
Try higher order corrector (for fast local convergence).
- virtual char [UpdateForNextIteration](#) (Number alpha_primal_test)
Method for ending the current line search.
- virtual void [StartWatchDog](#) ()

Method for setting internal data if the watchdog procedure is started.

- virtual void [StopWatchDog](#) ()

Method for setting internal data if the watchdog procedure is stopped.

Constructors/Destructors

- [FilterLSAcceptor](#) (const [SmartPtr](#)< [PDSolver](#) > &pd_solver)

Constructor.

- virtual [~FilterLSAcceptor](#) ()

Default destructor.

Trial Point Accepting Methods. Used internally to check certain

acceptability criteria and used externally (by the restoration phase convergence check object, for instance)

- bool [IsAcceptableToCurrentIterate](#) (Number trial_barr, Number trial_theta, bool called_from_restoration=false) const

Checks if a trial point is acceptable to the current iterate.

- bool [IsAcceptableToCurrentFilter](#) (Number trial_barr, Number trial_theta) const

Checks if a trial point is acceptable to the current filter.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)

Methods for [OptionsList](#).

Additional Inherited Members

3.45.1 Detailed Description

[Filter](#) line search.

This class implements the filter line search procedure.

Definition at line 23 of file IpFilterLSAcceptor.hpp.

3.45.2 Constructor & Destructor Documentation

3.45.2.1 Ipopt::FilterLSAcceptor::FilterLSAcceptor (const [SmartPtr](#)< [PDSolver](#) > &pd_solver)

Constructor.

The [PDSolver](#) object only needs to be provided (i.e. not NULL) if second order correction or corrector steps are to be used.

3.45.3 Member Function Documentation

3.45.3.1 virtual void Ipopt::FilterLSAcceptor::Reset () [virtual]

Reset the acceptor.

This function should be called if all previous information should be discarded when the line search is performed the next time. For example, this method should be called if the barrier parameter is changed.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.45.3.2 `virtual void Ipopt::FilterLSAcceptor::InitThisLineSearch ( bool in_watchdog ) [virtual]`

Initialization for the next line search.

The flag `in_watchdog` indicates if we are currently in an active watchdog procedure.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.45.3.3 `virtual void Ipopt::FilterLSAcceptor::PrepareRestoPhaseStart ( ) [virtual]`

Method that is called before the restoration phase is called.

Here, we can set up things that are required in the termination test for the restoration phase, such as augmenting a filter.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.45.3.4 `virtual Number Ipopt::FilterLSAcceptor::CalculateAlphaMin ( ) [virtual]`

Method returning the lower bound on the trial step sizes.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.45.3.5 `virtual bool Ipopt::FilterLSAcceptor::CheckAcceptabilityOfTrialPoint ( Number alpha_primal ) [virtual]`

Method for checking if current trial point is acceptable.

It is assumed that the delta information in `ip_data` is the search direction used in criteria. The primal trial point has to be set before the call.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.45.3.6 `virtual bool Ipopt::FilterLSAcceptor::TrySecondOrderCorrection ( Number alpha_primal_test, Number & alpha_primal, SmartPtr< IteratesVector > & actual_delta ) [virtual]`

Try a second order correction for the constraints.

If the first trial step (with incoming `alpha_primal`) has been reject, this tries up to `max_soc_` second order corrections for the constraints. Here, `alpha_primal_test` is the step size that has to be used in the filter acceptance tests. On output `actual_delta_` has been set to the step including the second order correction if it has been accepted, otherwise it is unchanged. If the SOC step has been accepted, `alpha_primal` has the fraction-to-the-boundary value for the SOC step on output. The return value is true, if a SOC step has been accepted.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.45.3.7 `virtual bool Ipopt::FilterLSAcceptor::TryCorrector ( Number alpha_primal_test, Number & alpha_primal, SmartPtr< IteratesVector > & actual_delta ) [virtual]`

Try higher order corrector (for fast local convergence).

In contrast to a second order correction step, which tries to make an unacceptable point acceptable by improving constraint violation, this corrector step is tried even if the regular primal-dual step is acceptable.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.45.3.8 `virtual char Ipopt::FilterLSAcceptor::UpdateForNextIteration ( Number alpha_primal_test ) [virtual]`

Method for ending the current line search.

When it is called, the internal data should be updates, e.g., the filter might be augmented. `alpha_primal_test` is the value of alpha that has been used for in the acceptance test ealier.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.45.3.9 virtual void Ipopt::FilterLSAcceptor::StartWatchDog () [virtual]

Method for setting internal data if the watchdog procedure is started.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.45.3.10 virtual void Ipopt::FilterLSAcceptor::StopWatchDog () [virtual]

Method for setting internal data if the watchdog procedure is stopped.

Implements [Ipopt::BacktrackingLSAcceptor](#).

The documentation for this class was generated from the following file:


- IpFilterLSAcceptor.hpp

3.46 Ipopt::GenAugSystemSolver Class Reference

Solver for the augmented system using GenKKT solver interfaces.

```
#include <IpGenAugSystemSolver.hpp>
```

Inheritance diagram for Ipopt::GenAugSystemSolver:

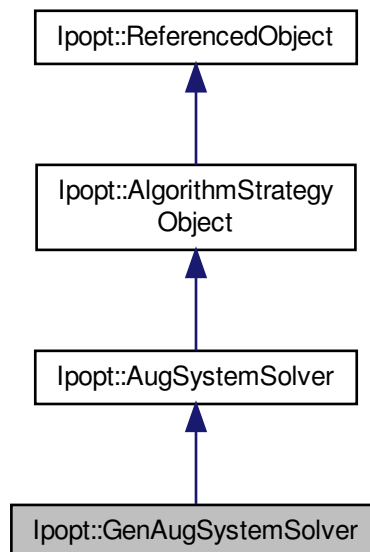

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)

- virtual ESymSolverStatus [MultiSolve](#) (const [SymMatrix](#) *W, double W_factor, const [Vector](#) *D_x, double delta_x, const [Vector](#) *D_s, double delta_s, const [Matrix](#) *J_c, const [Vector](#) *D_c, double delta_c, const [Matrix](#) *J_d, const [Vector](#) *D_d, double delta_d, std::vector< [SmartPtr](#)< const [Vector](#) > > &rhs_xV, std::vector< [SmartPtr](#)< const [Vector](#) > > &rhs_sV, std::vector< [SmartPtr](#)< const [Vector](#) > > &rhs_cV, std::vector< [SmartPtr](#)< const [Vector](#) > > &rhs_dV, std::vector< [SmartPtr](#)< [Vector](#) > > &sol_xV, std::vector< [SmartPtr](#)< [Vector](#) > > &sol_sV, std::vector< [SmartPtr](#)< [Vector](#) > > &sol_cV, std::vector< [SmartPtr](#)< [Vector](#) > > &sol_dV, bool check_NegEVals, Index numberOfNegEVals)
Set up the augmented system and solve it for a set of given right hand side - implementation for GenTMatrices and SymTMatrices.
- virtual Index [NumberOfNegEVals](#) () const
Number of negative eigenvalues detected during last solve.
- virtual bool [ProvidesInertia](#) () const
Query whether inertia is computed by linear solver.
- virtual bool [IncreaseQuality](#) ()
Request to increase quality of solution for next solve.

Constructors/Destructors

- [GenAugSystemSolver](#) ([GenKKTSolverInterface](#) &SolverInterface)
Constructor using only a linear solver object.
- virtual [~GenAugSystemSolver](#) ()
Default destructor.

Additional Inherited Members

3.46.1 Detailed Description

Solver for the augmented system using GenKKTSolverInterfaces.

This takes any [Vector](#) values out and provides Number*'s, but Matrices are provided as given from the [NLP](#).

Definition at line 22 of file IpGenAugSystemSolver.hpp.

3.46.2 Member Function Documentation

3.46.2.1 virtual Index Ipopt::GenAugSystemSolver::NumberOfNegEVals () const [virtual]

Number of negative eigenvalues detected during last solve.

Returns the number of negative eigenvalues of the most recent factorized matrix. This must not be called if the linear solver does not compute this quantities (see ProvidesInertia).

Implements [Ipopt::AugSystemSolver](#).

3.46.2.2 virtual bool Ipopt::GenAugSystemSolver::ProvidesInertia () const [virtual]

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implements [Ipopt::AugSystemSolver](#).

3.46.2.3 virtual bool Ipopt::GenAugSystemSolver::IncreaseQuality () [virtual]

Request to increase quality of solution for next solve.

Ask underlying linear solver to increase quality of solution for the next solve (e.g. increase pivot tolerance). Returns false, if this is not possible (e.g. maximal pivot tolerance already used.)

Implements [Ipopt::AugSystemSolver](#).

The documentation for this class was generated from the following file:


- IpGenAugSystemSolver.hpp

3.47 Ipopt::GenKKTSolverInterface Class Reference

Base class for interfaces to symmetric indefinite linear solvers for generic matrices.

```
#include <IpGenKKTSolverInterface.hpp>
```

Inheritance diagram for Ipopt::GenKKTSolverInterface:

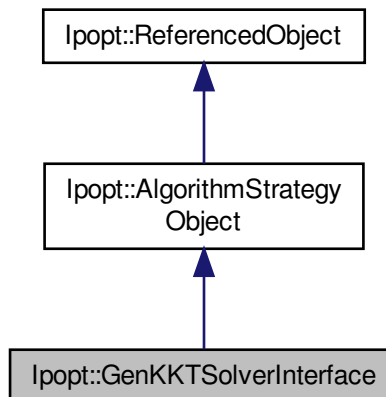

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
overloaded from [AlgorithmStrategyObject](#)

Constructor/Destructor

- [GenKKTSolverInterface](#) ()
- virtual [~GenKKTSolverInterface](#) ()

Methods for requesting solution of the linear system.

- virtual ESymSolverStatus [MultiSolve](#) (bool new_matrix, Index n_x, Index n_c, Index n_d, [SmartPtr](#)< const [SymMatrix](#) > W, [SmartPtr](#)< const [Matrix](#) > Jac_c, [SmartPtr](#)< const [Matrix](#) > Jac_d, const Number *D_x, const Number *D_s, const Number *D_c, const Number *D_d, Number delta_x, Number delta_s, Number delta_c, Number delta_d, Index n_rhs, Number *rhssol, bool check_NegEvals, Index numberOfNegEvals)=0
Solve operation for multiple right hand sides.
- virtual Index [NumberOfNegEvals](#) () const =0
Number of negative eigenvalues detected during last factorization.
- virtual bool [IncreaseQuality](#) ()=0
Request to increase quality of solution for next solve.
- virtual bool [ProvidesInertia](#) () const =0
Query whether inertia is computed by linear solver.

Additional Inherited Members

3.47.1 Detailed Description

Base class for interfaces to symmetric indefinite linear solvers for generic matrices.

Definition at line 20 of file IpGenKKTSolverInterface.hpp.

3.47.2 Member Function Documentation

3.47.2.1 virtual ESymSolverStatus Ipopt::GenKKTSolverInterface::MultiSolve (bool new_matrix, Index n_x, Index n_c, Index n_d, [SmartPtr](#)< const [SymMatrix](#) > W, [SmartPtr](#)< const [Matrix](#) > Jac_c, [SmartPtr](#)< const [Matrix](#) > Jac_d, const Number * D_x, const Number * D_s, const Number * D_c, const Number * D_d, Number delta_x, Number delta_s, Number delta_c, Number delta_d, Index n_rhs, Number * rhssol, bool check_NegEvals, Index numberOfNegEvals) [pure virtual]

Solve operation for multiple right hand sides.

The linear system is of the form

$$\begin{bmatrix} W + D_x + \delta_x I & 0 & J_c^T & J_d^T \\ 0 & D_s + \delta_s I & 0 & -I \\ J_c & 0 & D_c - \delta_c I & 0 \\ J_d & -I & 0 & D_d - \delta_d I \end{bmatrix} \begin{pmatrix} sol_x \\ sol_s \\ sol_c \\ sol_d \end{pmatrix} = \begin{pmatrix} rhs_x \\ rhs_s \\ rhs_c \\ rhs_d \end{pmatrix}$$

(see also [AugSystemSolver](#)).

The return code is SYMSOLV_SUCCESS if the factorization and solves were successful, SYMSOLV_SINGULAR if the linear system is singular, and SYMSOLV_WRONG_INERTIA if check_NegEvals is true and the number of negative eigenvalues in the matrix does not match numberOfNegEvals. If SYMSOLV_CALL_AGAIN is returned, then the calling function will request the pointer for the array for storing a again (with GetValuesPtr), write the values of the nonzero elements into it, and call this MultiSolve method again with the same right-hand sides. (This can be done, for example, if the linear solver realized it does not have sufficient memory and needs to redo the factorization; e.g., for MA27.)

The number of right-hand sides is given by nrhs, the values of the right-hand sides are given in rhs_vals (one full right-hand side stored immediately after the other), and solutions are to be returned in the same array.

check_NegEvals will not be chosen true, if [ProvidesInertia\(\)](#) returns false.

Parameters

<i>new_matrix</i>	If this flag is false, the same matrix as in the most recent call is given to the solver again
<i>n_x</i>	Dimension of D_x
<i>n_c</i>	Dimension of D_s and D_c
<i>n_d</i>	Dimension of D_d
<i>W</i>	Hessian of Lagrangian (as given by NLP)
<i>Jac_c</i>	Jacobian of equality constraints (as given by NLP)
<i>Jac_d</i>	Jacobian of inequality constraints (as given by NLP)
<i>D_x</i>	Array with the elements D_x (if NULL, assume all zero)
<i>D_s</i>	Array with the elements D_s (if NULL, assume all zero)
<i>D_c</i>	Array with the elements D_c (if NULL, assume all zero)
<i>D_d</i>	Array with the elements D_d (if NULL, assume all zero)
<i>delta_x</i>	δ_x
<i>delta_s</i>	δ_s
<i>delta_c</i>	δ_c
<i>delta_d</i>	δ_d
<i>n_rhs</i>	Number of right hand sides
<i>rhssol</i>	On input, this contains the right hand sides, and on successful termination of the solver, the solutions are expected in there on return. At the moment, the order is x,d,c,s, but this can be made flexible and chosen according to an option.
<i>check_NegEvals</i>	if true, we want to ensure that the inertia is correct
<i>numberOfNegEvals</i>	Required number of negative eigenvalues if <i>check_NegEvals</i> is true

3.47.2.2 virtual Index Ipopt::GenKKTSolverInterface::NumberOfNegEvals () const [pure virtual]

Number of negative eigenvalues detected during last factorization.

Returns the number of negative eigenvalues of the most recent factorized matrix. This must not be called if the linear solver does not compute this quantities (see ProvidesInertia).

3.47.2.3 virtual bool Ipopt::GenKKTSolverInterface::IncreaseQuality () [pure virtual]

Request to increase quality of solution for next solve.

The calling class asks linear solver to increase quality of solution for the next solve (e.g. increase pivot tolerance). Returns false, if this is not possible (e.g. maximal pivot tolerance already used.)

3.47.2.4 virtual bool Ipopt::GenKKTSolverInterface::ProvidesInertia () const [pure virtual]

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

The documentation for this class was generated from the following file:


- IpGenKKTSolverInterface.hpp

3.48 Ipopt::GenTMatrix Class Reference

Class for general matrices stored in triplet format.

```
#include <IpGenTMatrix.hpp>
```

Inheritance diagram for Ipopt::GenTMatrix:

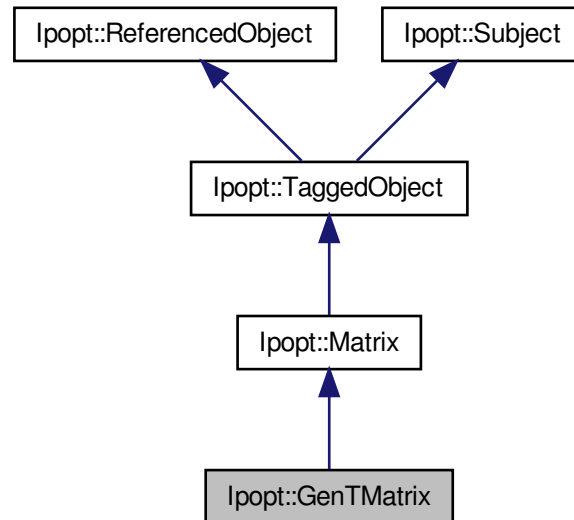

Public Member Functions

Constructors / Destructors

- [GenTMatrix](#) (const [GenTMatrixSpace](#) *owner_space)
Constructor, taking the owner_space.
- [~GenTMatrix](#) ()
Destructor.

Changing the Values.

- void [SetValues](#) (const Number *[Values](#))
Set values of nonzero elements.

Accessor Methods

- Index [Nonzeros](#) () const
Number of nonzero entries.
- const Index * [Irows](#) () const
Array with Row indices (counting starts at 1)
- const Index * [Jcols](#) () const
Array with Column indices (counting starts at 1)
- const Number * [Values](#) () const
Array with nonzero values (const version).
- Number * [Values](#) ()
Array with the nonzero values of this matrix (non-const version).

Protected Member Functions

Overloaded methods from Matrix base class

- virtual void [MultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix-vector multiply.
- virtual void [TransMultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix(transpose) vector multiply.
- virtual bool [IsValidNumbersImpl](#) () const
Method for determining if all stored numbers are valid (i.e., no Inf or Nan).
- virtual void [ComputeRowAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const
Compute the max-norm of the rows in the matrix.
- virtual void [ComputeColAMaxImpl](#) ([Vector](#) &cols_norms, bool init) const
Compute the max-norm of the columns in the matrix.
- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
Print detailed information about the matrix.

Additional Inherited Members

3.48.1 Detailed Description

Class for general matrices stored in triplet format.

In the triplet format, the nonzeros elements of a general matrix is stored in three arrays, Irow, Jcol, and Values, all of length Nonzeros. The first two arrays indicate the location of a non-zero element (row and column indices), and the last array stores the value at that location. If nonzero elements are listed more than once, their values are added.

The structure of the nonzeros (i.e. the arrays Irow and Jcol) cannot be changed after the matrix can been initialized. Only the values of the nonzero elements can be modified.

Note that the first row and column of a matrix has index 1, not 0.

Definition at line 36 of file IpGenTMatrix.hpp.

3.48.2 Member Function Documentation

3.48.2.1 void Ipopt::GenTMatrix::SetValues (const Number * Values)

Set values of nonzero elements.

The values of the nonzero elements are copied from the incoming Number array. Important: It is assume that the order of the values in Values corresponds to the one of Iln and Jcn given to one of the constructors above.

3.48.2.2 const Number* Ipopt::GenTMatrix::Values () const [inline]

Array with nonzero values (const version).

Definition at line 73 of file IpGenTMatrix.hpp.

3.48.2.3 Number* Ipopt::GenTMatrix::Values () [inline]

Array with the nonzero values of this matrix (non-const version).

Use this method only if you are intending to change the values, because the [GenTMatrix](#) will be marked as changed.

Definition at line 82 of file IpGenTMatrix.hpp.

3.48.2.4 `virtual void Ipopt::GenTMatrix::MultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const`
`[protected], [virtual]`

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.48.2.5 `virtual void Ipopt::GenTMatrix::TransMultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const`
`[protected], [virtual]`

Matrix(transpose) vector multiply.

Computes $y = \alpha * \text{Matrix}^T * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.48.2.6 `virtual bool Ipopt::GenTMatrix::IsValidNumbersImpl ( ) const` `[protected], [virtual]`

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Reimplemented from [Ipopt::Matrix](#).

3.48.2.7 `virtual void Ipopt::GenTMatrix::ComputeRowAMaxImpl ( Vector & rows_norms, bool init ) const` `[protected], [virtual]`

Compute the max-norm of the rows in the matrix.

The result is stored in *rows_norms*. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.48.2.8 `virtual void Ipopt::GenTMatrix::ComputeColAMaxImpl ( Vector & cols_norms, bool init ) const` `[protected], [virtual]`

Compute the max-norm of the columns in the matrix.

The result is stored in *cols_norms*. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.48.2.9 `virtual void Ipopt::GenTMatrix::PrintImpl ( const Journalist & jnlst, EJournalLevel level, EJournalCategory category, const std::string & name, Index indent, const std::string & prefix ) const` `[inline], [protected], [virtual]`

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

Definition at line 107 of file `IpGenTMatrix.hpp`.

The documentation for this class was generated from the following file:


- `IpGenTMatrix.hpp`

3.49 Ipopt::GenTMatrixSpace Class Reference

This is the matrix space for a [GenTMatrix](#) with fixed sparsity structure.

```
#include <IpGenTMatrix.hpp>
```

Inheritance diagram for Ipopt::GenTMatrixSpace:

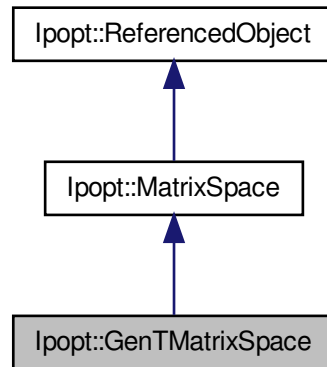

Public Member Functions

- [GenTMatrix](#) * [MakeNewGenTMatrix](#) () const
Method for creating a new matrix of this specific type.
- virtual [Matrix](#) * [MakeNew](#) () const
Overloaded MakeNew method for the [MatrixSpace](#) base class.

Constructors / Destructors

- [GenTMatrixSpace](#) (Index nRows, Index nCols, Index nonZeros, const Index *iRows, const Index *jCols)
Constructor, given the number of rows and columns, as well as the number of nonzeros and the position of the nonzero elements.
- [~GenTMatrixSpace](#) ()
Destructor.

Methods describing Matrix structure

- Index [Nonzeros](#) () const
Number of non-zeros in the sparse matrix.
- const Index * [Irows](#) () const
Row index of each non-zero element (counting starts at 1)
- const Index * [Jcols](#) () const
Column index of each non-zero element (counting starts at 1)

3.49.1 Detailed Description

This is the matrix space for a [GenTMatrix](#) with fixed sparsity structure.

The sparsity structure is stored here in the matrix space.

Definition at line 164 of file IpGenTMatrix.hpp.

3.49.2 Constructor & Destructor Documentation

3.49.2.1 Ipopt::GenTMatrixSpace::GenTMatrixSpace (Index *nRows*, Index *nCols*, Index *nonZeros*, const Index * *iRows*, const Index * *jCols*)

Constructor, given the number of rows and columns, as well as the number of nonzeros and the position of the nonzero elements.

Note that the counting of the nonzeros starts a 1, i.e., `iRows[i]==1` and `jCols[i]==1` refers to the first element in the first row. This is in accordance with the HSL data structure.

3.49.3 Member Function Documentation

3.49.3.1 GenTMatrix* Ipopt::GenTMatrixSpace::MakeNewGenTMatrix () const [inline]

Method for creating a new matrix of this specific type.

Definition at line 189 of file `IpGenTMatrix.hpp`.

The documentation for this class was generated from the following file:


- `IpGenTMatrix.hpp`

3.50 Ipopt::GradientScaling Class Reference

This class does problem scaling by setting the scaling parameters based on the maximum of the gradient at the user provided initial point.

```
#include <IpGradientScaling.hpp>
```

Inheritance diagram for Ipopt::GradientScaling:

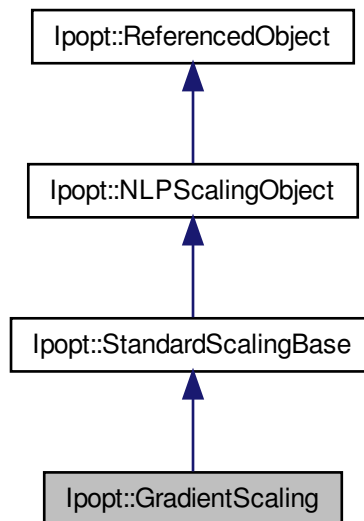

Public Member Functions

Constructors/Destructors

- **GradientScaling** (const [SmartPtr](#)< [NLP](#) > &nlp)
- virtual [~GradientScaling](#) ()

Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) (const [SmartPtr](#)< [RegisteredOptions](#) > &options)

Methods for IpoptType.

Protected Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
- virtual void [DetermineScalingParametersImpl](#) (const [SmartPtr](#)< const [VectorSpace](#) > x_space, const [SmartPtr](#)< const [VectorSpace](#) > c_space, const [SmartPtr](#)< const [VectorSpace](#) > d_space, const [SmartPtr](#)< const [MatrixSpace](#) > jac_c_space, const [SmartPtr](#)< const [MatrixSpace](#) > jac_d_space, const [SmartPtr](#)< const [SymMatrixSpace](#) > h_space, const [Matrix](#) &Px_L, const [Vector](#) &x_L, const [Matrix](#) &Px_U, const [Vector](#) &x_U, Number &df, [SmartPtr](#)< [Vector](#) > &dx, [SmartPtr](#)< [Vector](#) > &dc, [SmartPtr](#)< [Vector](#) > &dd)

This is the method that has to be overloaded by a particular scaling method that somehow computes the scaling vectors dx, dc, and dd.

3.50.1 Detailed Description

This class does problem scaling by setting the scaling parameters based on the maximum of the gradient at the user provided initial point.

Definition at line 21 of file IpGradientScaling.hpp.

3.50.2 Member Function Documentation

3.50.2.1 static void Ipopt::GradientScaling::RegisterOptions (const [SmartPtr](#)< [RegisteredOptions](#) > & options)
[static]

Methods for IpoptType.

Register the options for this class

3.50.2.2 virtual void Ipopt::GradientScaling::DetermineScalingParametersImpl (const [SmartPtr](#)< const [VectorSpace](#) > x_space, const [SmartPtr](#)< const [VectorSpace](#) > c_space, const [SmartPtr](#)< const [VectorSpace](#) > d_space, const [SmartPtr](#)< const [MatrixSpace](#) > jac_c_space, const [SmartPtr](#)< const [MatrixSpace](#) > jac_d_space, const [SmartPtr](#)< const [SymMatrixSpace](#) > h_space, const [Matrix](#) & Px_L, const [Vector](#) & x_L, const [Matrix](#) & Px_U, const [Vector](#) & x_U, Number & df, [SmartPtr](#)< [Vector](#) > & dx, [SmartPtr](#)< [Vector](#) > & dc, [SmartPtr](#)< [Vector](#) > & dd) [protected], [virtual]

This is the method that has to be overloaded by a particular scaling method that somehow computes the scaling vectors dx, dc, and dd.

The pointers to those vectors can be NULL, in which case no scaling for that item will be done later.

Implements [Ipopt::StandardScalingBase](#).

The documentation for this class was generated from the following file:


- IpGradientScaling.hpp

3.51 Ipopt::HessianUpdater Class Reference

Abstract base class for objects responsible for updating the Hessian information.

```
#include <IpHessianUpdater.hpp>
```

Inheritance diagram for Ipopt::HessianUpdater:

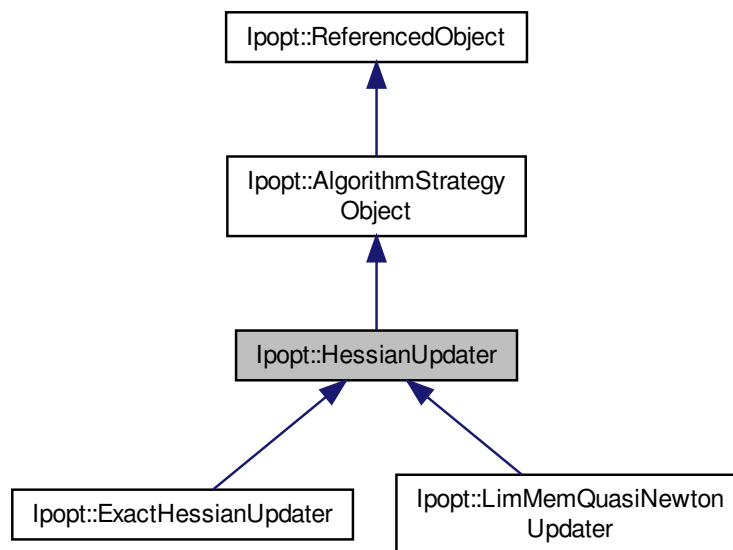

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
overloaded from [AlgorithmStrategyObject](#)
- virtual void [UpdateHessian](#) ()=0
Update the Hessian based on the current information in IpData, and possibly on information from previous calls.

Constructors/Destructors

- [HessianUpdater](#) ()
Default Constructor.
- virtual [~HessianUpdater](#) ()
Default destructor.

Additional Inherited Members

3.51.1 Detailed Description

Abstract base class for objects responsible for updating the Hessian information.

This can be done using exact second derivatives from the [NLP](#), or by a quasi-Newton Option. The result is put into the W field in IpData.

Definition at line 22 of file IpHessianUpdater.hpp.

The documentation for this class was generated from the following file:


- IpHessianUpdater.hpp

3.52 Ipopt::IdentityMatrix Class Reference

Class for Matrices which are multiples of the identity matrix.

```
#include <IpIdentityMatrix.hpp>
```

Inheritance diagram for Ipopt::IdentityMatrix:

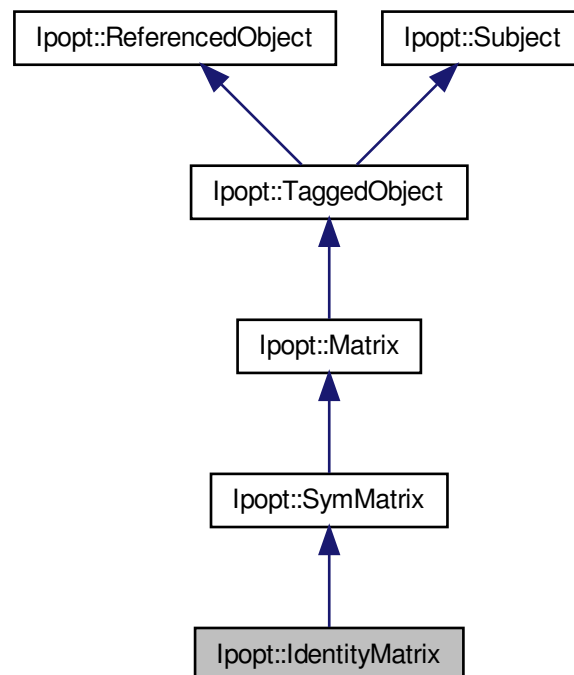

Public Member Functions

- void [SetFactor](#) (Number factor)

Method for setting the factor for the identity matrix.

- Number [GetFactor](#) () const

Method for getting the factor for the identity matrix.

- Index [Dim](#) () const

Method for obtaining the dimension of the matrix.

Constructors / Destructors

- [IdentityMatrix](#) (const [SymMatrixSpace](#) *owner_space)

Constructor, initializing with dimensions of the matrix (true identity matrix).

- [~IdentityMatrix](#) ()

Destructor.

Protected Member Functions

Methods overloaded from matrix

- virtual void [MultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix-vector multiply.
- virtual void [AddMSinvZImpl](#) (Number alpha, const [Vector](#) &S, const [Vector](#) &Z, [Vector](#) &X) const
 $X = X + \alpha * (\text{Matrix } S^{-1} \{ -1 \} Z).$
- virtual bool [IsValidNumbersImpl](#) () const
Method for determining if all stored numbers are valid (i.e., no Inf or Nan).
- virtual void [ComputeRowAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const
Compute the max-norm of the rows in the matrix.
- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
Print detailed information about the matrix.

Additional Inherited Members

3.52.1 Detailed Description

Class for Matrices which are multiples of the identity matrix.

Definition at line 21 of file IpIdentityMatrix.hpp.

3.52.2 Member Function Documentation

3.52.2.1 void Ipopt::IdentityMatrix::SetFactor (Number factor) [inline]

Method for setting the factor for the identity matrix.

Definition at line 38 of file IpIdentityMatrix.hpp.

3.52.2.2 Number Ipopt::IdentityMatrix::GetFactor () const [inline]

Method for getting the factor for the identity matrix.

Definition at line 44 of file IpIdentityMatrix.hpp.

3.52.2.3 Index Ipopt::IdentityMatrix::Dim () const

Method for obtaining the dimension of the matrix.

Reimplemented from [Ipopt::SymMatrix](#).

3.52.2.4 `virtual void Ipopt::IdentityMatrix::MultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const` `[protected], [virtual]`

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.52.2.5 `virtual void Ipopt::IdentityMatrix::AddMSinvZImpl ( Number alpha, const Vector & S, const Vector & Z, Vector & X )` `const` `[protected], [virtual]`

$X = X + \alpha * (\text{Matrix } S^{-1} Z)$.

Prototype for this specialize method is provided, but for efficient implementation it should be overloaded for the expansion matrix.

Reimplemented from [Ipopt::Matrix](#).

3.52.2.6 `virtual bool Ipopt::IdentityMatrix::IsValidNumbersImpl ( ) const` `[protected], [virtual]`

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Reimplemented from [Ipopt::Matrix](#).

3.52.2.7 `virtual void Ipopt::IdentityMatrix::ComputeRowAMaxImpl ( Vector & rows_norms, bool init ) const` `[protected], [virtual]`

Compute the max-norm of the rows in the matrix.

The result is stored in `rows_norms`. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.52.2.8 `virtual void Ipopt::IdentityMatrix::PrintImpl ( const Journalist & jnlst, EJournalLevel level, EJournalCategory category, const std::string & name, Index indent, const std::string & prefix ) const` `[protected], [virtual]`

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

The documentation for this class was generated from the following file:


- `IpIdentityMatrix.hpp`

3.53 Ipopt::IdentityMatrixSpace Class Reference

This is the matrix space for [IdentityMatrix](#).

```
#include <IpIdentityMatrix.hpp>
```

Inheritance diagram for Ipopt::IdentityMatrixSpace:

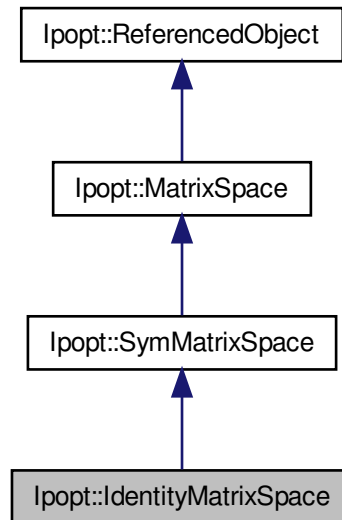

Public Member Functions

- virtual [SymMatrix](#) * [MakeNewSymMatrix](#) () const
Overloaded MakeNew method for the [SymMatrixSpace](#) base class.
- [IdentityMatrix](#) * [MakeNewIdentityMatrix](#) () const
Method for creating a new matrix of this specific type.

Constructors / Destructors

- [IdentityMatrixSpace](#) (Index dim)
Constructor, given the dimension of the matrix.
- virtual [~IdentityMatrixSpace](#) ()
Destructor.

3.53.1 Detailed Description

This is the matrix space for [IdentityMatrix](#).

Definition at line 99 of file `IpIdentityMatrix.hpp`.

3.53.2 Constructor & Destructor Documentation

3.53.2.1 Ipopt::IdentityMatrixSpace::IdentityMatrixSpace (Index dim) [inline]

Constructor, given the dimension of the matrix.

Definition at line 105 of file `IpIdentityMatrix.hpp`.

3.53.3 Member Function Documentation

3.53.3.1 IdentityMatrix* Ipopt::IdentityMatrixSpace::MakeNewIdentityMatrix () const [inline]

Method for creating a new matrix of this specific type.

Definition at line 123 of file IpIdentityMatrix.hpp.

The documentation for this class was generated from the following file:


- IpIdentityMatrix.hpp

3.54 Ipopt::InexactAlgorithmBuilder Class Reference

Builder to create a complete IpoptAlg object for the inexact step computation version.

```
#include <IpInexactAlgBuilder.hpp>
```

Inheritance diagram for Ipopt::InexactAlgorithmBuilder:

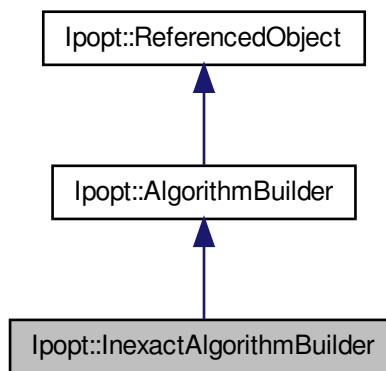

Public Member Functions

Constructors/Destructors

- [InexactAlgorithmBuilder](#) ()
Constructor.
- virtual [~InexactAlgorithmBuilder](#) ()
Destructor.

Methods to build parts of the algorithm

- virtual void **BuildIpoptObjects** (const [Journalist](#) &jnlst, const [OptionsList](#) &options, const std::string &prefix, const [SmartPtr](#)< [NLP](#) > &nlp, [SmartPtr](#)< [IpoptNLP](#) > &ip_nlp, [SmartPtr](#)< [IpoptData](#) > &ip_data, [SmartPtr](#)< [IpoptCalculatedQuantities](#) > &ip_cq)
- virtual [SmartPtr](#)< [IpoptAlgorithm](#) > **BuildBasicAlgorithm** (const [Journalist](#) &jnlst, const [OptionsList](#) &options, const std::string &prefix)

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)
Methods for IpoptTypeInfo.

3.54.1 Detailed Description

Builder to create a complete IpoptAlg object for the inexact step computation version.

Definition at line 21 of file IpInexactAlgBuilder.hpp.

3.54.2 Member Function Documentation

3.54.2.1 static void Ipopt::InexactAlgorithmBuilder::RegisterOptions (SmartPtr< RegisteredOptions > roptions)
[static]

Methods for IpoptTypeInfo.

register the options used by the algorithm builder

Reimplemented from [Ipopt::AlgorithmBuilder](#).

The documentation for this class was generated from the following file:


- IpInexactAlgBuilder.hpp

3.55 Ipopt::InexactCq Class Reference

Class for all Chen-Goldfarb penalty method specific calculated quantities.

```
#include <IpInexactCq.hpp>
```

Inheritance diagram for Ipopt::InexactCq:

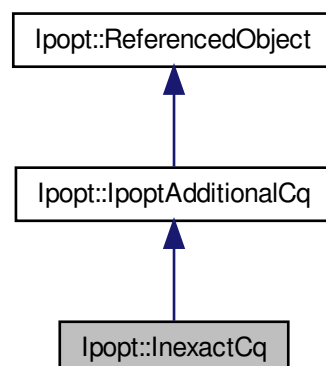

Public Member Functions

- bool [Initialize](#) (const [Journalist](#) &jnlst, const [OptionsList](#) &options, const std::string &prefix)
This method must be called to initialize the global algorithmic parameters.
- [SmartPtr](#)< const [Vector](#) > [curr_jac_cdT_times_curr_cdminuss](#) ()
Gradient of infeasibility w.r.t.
- [SmartPtr](#)< const [Vector](#) > [curr_scaling_slacks](#) ()
Vector of all inequality slacks for doing the slack-based scaling.
- [SmartPtr](#)< const [Vector](#) > [curr_slack_scaled_d_minus_s](#) ()
Vector with the slack-scaled d minus s inequalities.
- Number [curr_scaled_Ac_norm](#) ()
Scaled norm of Ac.
- Number [curr_scaled_A_norm2](#) ()
Scaled, squared norm of A.
- Number [slack_scaled_norm](#) (const [Vector](#) &x, const [Vector](#) &s)
Compute the 2-norm of a slack-scaled vector with x and s component.
- [SmartPtr](#)< const [Vector](#) > [curr_W_times_vec_x](#) (const [Vector](#) &vec_x)
Compute x component of the $W \cdot \text{vec}$ product for the current Hessian and a vector.
- [SmartPtr](#)< const [Vector](#) > [curr_W_times_vec_s](#) (const [Vector](#) &vec_s)
Compute s component of the $W \cdot \text{vec}$ product for the current Hessian and a vector.
- [SmartPtr](#)< const [Vector](#) > [curr_Wu_x](#) ()
Compute x component of the $W \cdot u$ product for the current values.
- [SmartPtr](#)< const [Vector](#) > [curr_Wu_s](#) ()
Compute s component of the $W \cdot u$ product for the current values.
- Number [curr_uWu](#) ()
Compute the $u^T W \cdot u$ product for the current values.
- [SmartPtr](#)< const [Vector](#) > [curr_jac_times_normal_c](#) ()
Compute the c-component of the product of the current constraint Jacobian with the current normal step.
- [SmartPtr](#)< const [Vector](#) > [curr_jac_times_normal_d](#) ()
Compute the d-component of the product of the current constraint Jacobian with the current normal step.

Constructors/Destructors

- [InexactCq](#) ([IpoptNLP](#) *ip_nlp, [IpoptData](#) *ip_data, [IpoptCalculatedQuantities](#) *ip_cq)
Constructor.
- virtual [~InexactCq](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) (const [SmartPtr](#)< [RegisteredOptions](#) > &roptions)
Methods for IpoptType.

3.55.1 Detailed Description

Class for all Chen-Goldfarb penalty method specific calculated quantities.

Definition at line 22 of file `IpInexactCq.hpp`.

3.55.2 Member Function Documentation

3.55.2.1 `bool Ipopt::InexactCq::Initialize ( const Journalist & jnlst, const OptionsList & options, const std::string & prefix )`
`[virtual]`

This method must be called to initialize the global algorithmic parameters.

The parameters are taken from the [OptionsList](#) object.

Implements [Ipopt::IpoptAdditionalCq](#).

3.55.2.2 `SmartPtr<const Vector> Ipopt::InexactCq::curr_jac_cdT_times_curr_cdmnuss ( )`

Gradient of infeasibility w.r.t.

x. Jacobian of equality constraints transpose times the equality constraints plus Jacobian of the inequality constraints transpose times the inequality constraints (including slacks).

3.55.2.3 `SmartPtr<const Vector> Ipopt::InexactCq::curr_Wu_x ( )`

Compute x component of the $W*u$ product for the current values.

u here is the tangential step.

3.55.2.4 `SmartPtr<const Vector> Ipopt::InexactCq::curr_Wu_s ( )`

Compute s component of the $W*u$ product for the current values.

u here is the tangential step.

3.55.2.5 `Number Ipopt::InexactCq::curr_uWu ( )`

Compute the $u^T W u$ product for the current values.

u here is the tangential step.

The documentation for this class was generated from the following file:


- `IpInexactCq.hpp`

3.56 Ipopt::InexactData Class Reference

Class to organize all the additional data required by the Chen-Goldfarb penalty function algorithm.

```
#include <IpInexactData.hpp>
```

Inheritance diagram for Ipopt::InexactData:

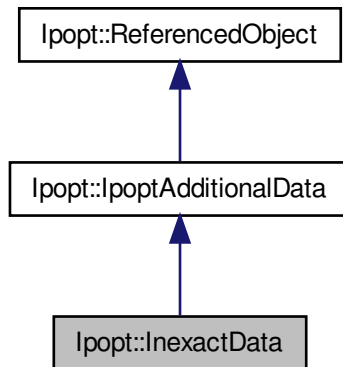

Public Member Functions

Constructors/Destructors

- [InexactData](#) ()
Constructor.
- [~InexactData](#) ()
Default destructor.

Methods overloaded from IpoptAdditionalData

- bool [Initialize](#) (const [Journalist](#) &jnlst, const [OptionsList](#) &options, const std::string &prefix)
This method must be called to initialize the global algorithmic parameters.
- bool [InitializeDataStructures](#) ()
Initialize Data Structures at the beginning.
- void [AcceptTrialPoint](#) ()
Do whatever is necessary to accept a trial point as current iterate.

Normal step set and accessor methods

- void [set_normal_x](#) ([SmartPtr](#)< [Vector](#) > &normal_x)
- void [set_normal_s](#) ([SmartPtr](#)< [Vector](#) > &normal_s)
- [SmartPtr](#)< const [Vector](#) > [normal_x](#) ()
- [SmartPtr](#)< const [Vector](#) > [normal_s](#) ()

Tangential step set and accessor methods

- void [set_tangential_x](#) ([SmartPtr](#)< const [Vector](#) > &tangential_x)
- void [set_tangential_s](#) ([SmartPtr](#)< const [Vector](#) > &tangential_s)
- [SmartPtr](#)< const [Vector](#) > [tangential_x](#) ()
- [SmartPtr](#)< const [Vector](#) > [tangential_s](#) ()

Flag indicating if most recent step has been fully*accepted.**This is used to determine if the trust region radius should be increased.*

- void **set_full_step_accepted** (bool full_step_accepted)
- bool **full_step_accepted** ()

Current value of penalty parameter

- void **set_curr_nu** (Number nu)
- Number **curr_nu** ()

Current normal step computation flag

- void **set_compute_normal** (bool compute_normal)
- bool **compute_normal** ()

Next iteration normal step computation flag

- void **set_next_compute_normal** (bool next_compute_normal)
- bool **next_compute_normal** ()

3.56.1 Detailed Description

Class to organize all the additional data required by the Chen-Goldfarb penalty function algorithm.

Definition at line 19 of file IpInexactData.hpp.

3.56.2 Member Function Documentation

3.56.2.1 `bool Ipopt::InexactData::Initialize ( const Journalist & jnlst, const OptionsList & options, const std::string & prefix )`
`[virtual]`

This method must be called to initialize the global algorithmic parameters.

The parameters are taken from the [OptionsList](#) object.

Implements [Ipopt::IpoptAdditionalData](#).

3.56.2.2 `bool Ipopt::InexactData::InitializeDataStructures ( )` `[virtual]`

Initialize Data Structures at the beginning.

Implements [Ipopt::IpoptAdditionalData](#).

3.56.2.3 `void Ipopt::InexactData::AcceptTrialPoint ( )` `[virtual]`

Do whatever is necessary to accept a trial point as current iterate.

This is also used to finish an iteration, i.e., to release memory, and to reset any flags for a new iteration.

Implements [Ipopt::IpoptAdditionalData](#).

The documentation for this class was generated from the following file:


- IpInexactData.hpp

3.57 Ipopt::InexactDoglegNormalStep Class Reference

Compute the normal step using a dogleg approach.

```
#include <IpInexactDoglegNormal.hpp>
```

Inheritance diagram for Ipopt::InexactDoglegNormalStep:

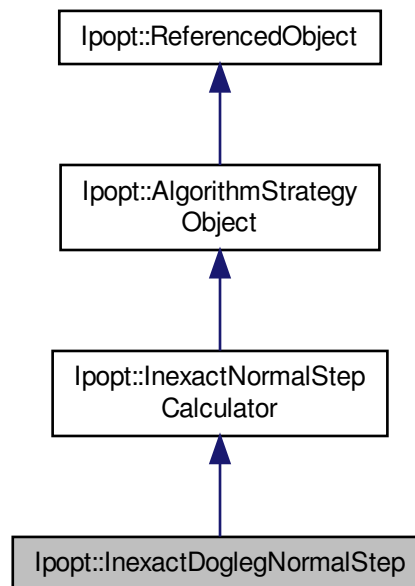

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [ComputeNormalStep](#) ([SmartPtr](#)< [Vector](#) > &normal_x, [SmartPtr](#)< [Vector](#) > &normal_s)
Method for computing the normal step.

Constructors/Destructors

- [InexactDoglegNormalStep](#) ([SmartPtr](#)< [InexactNewtonNormalStep](#) > newton_step, [SmartPtr](#)< [InexactNormalTerminationTester](#) > normal_tester=NULL)
Default onstructor.
- virtual [~InexactDoglegNormalStep](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members

3.57.1 Detailed Description

Compute the normal step using a dogleg approach.

Definition at line 20 of file IpInexactDoglegNormal.hpp.

3.57.2 Member Function Documentation

3.57.2.1 `virtual bool Ipopt::InexactDoglegNormalStep::ComputeNormalStep ( SmartPtr< Vector > & normal_x, SmartPtr< Vector > & normal_s ) [virtual]`

Method for computing the normal step.

The computed step is returned as normal_x and normal_s, for the x and s variables, respectively. These quantities are not slack-scaled. If the step cannot be computed, this method returns false.

Implements [Ipopt::InexactNormalStepCalculator](#).

The documentation for this class was generated from the following file:


- IpInexactDoglegNormal.hpp

3.58 Ipopt::InexactLSAcceptor Class Reference

Penalty function line search for the inexact step algorithm version.

```
#include <IpInexactLSAcceptor.hpp>
```

Inheritance diagram for Ipopt::InexactLSAcceptor:

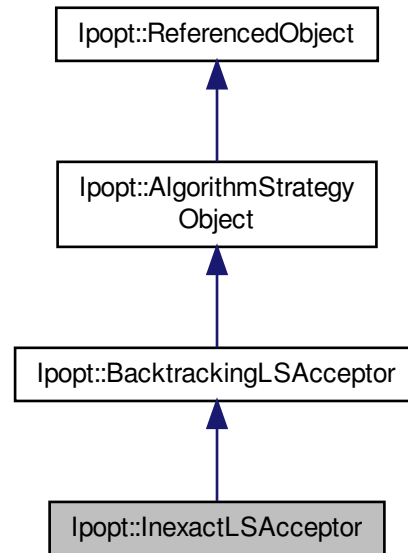

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
InitializeImpl - overloaded from [AlgorithmStrategyObject](#).
- virtual void [Reset](#) ()
Reset the acceptor.
- virtual void [InitThisLineSearch](#) (bool in_watchdog)
Initialization for the next line search.
- virtual void [PrepareRestoPhaseStart](#) ()
Method that is called before the restoration phase is called.
- virtual Number [CalculateAlphaMin](#) ()
Method returning the lower bound on the trial step sizes.
- virtual bool [CheckAcceptabilityOfTrialPoint](#) (Number alpha_primal)
Method for checking if current trial point is acceptable.
- virtual bool [TrySecondOrderCorrection](#) (Number alpha_primal_test, Number &alpha_primal, [SmartPtr](#)< [IteratesVector](#) > &actual_delta)
Try a second order correction for the constraints.
- virtual bool [TryCorrector](#) (Number alpha_primal_test, Number &alpha_primal, [SmartPtr](#)< [IteratesVector](#) > &actual_delta)
Try higher order corrector (for fast local convergence).
- virtual char [UpdateForNextIteration](#) (Number alpha_primal_test)
Method for ending the current line search.
- virtual void [StartWatchDog](#) ()

Method for setting internal data if the watchdog procedure is started.

- virtual void [StopWatchDog](#) ()

Method for setting internal data if the watchdog procedure is stopped.

- virtual Number [ComputeAlphaForY](#) (Number alpha_primal, Number alpha_dual, [SmartPtr](#)< [IteratesVector](#) > &delta)

Method for updating the equality constraint multipliers.

- virtual bool [HasComputeAlphaForY](#) () const

Method returning true if ComputeAlphaForY is implemented for this acceptor.

Constructors/Destructors

- [InexactLSAcceptor](#) ()

Constructor.

- virtual [~InexactLSAcceptor](#) ()

Default destructor.

Trial Point Accepting Methods. Used internally to check certain

acceptability criteria and used externally (by the restoration phase convergence check object, for instance)

- bool [IsAcceptableToCurrentIterate](#) (Number trial_barr, Number trial_theta, bool called_from_restoration=false) const

Checks if a trial point is acceptable to the current iterate.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)

Methods for [OptionsList](#).

Protected Member Functions

- [InexactData](#) & [InexData](#) ()

Method to easily access Inexact data.

- [InexactCq](#) & [InexCq](#) ()

Method to easily access Inexact calculated quantities.

3.58.1 Detailed Description

Penalty function line search for the inexact step algorithm version.

Definition at line 22 of file IpInexactLSAcceptor.hpp.

3.58.2 Constructor & Destructor Documentation

3.58.2.1 Ipopt::InexactLSAcceptor::InexactLSAcceptor ()

Constructor.

The [PDSysSolver](#) object only needs to be provided (i.e. not NULL) if second order correction or corrector steps are to be used.

3.58.3 Member Function Documentation

3.58.3.1 virtual void Ipopt::InexactLSAcceptor::Reset () [virtual]

Reset the acceptor.

This function should be called if all previous information should be discarded when the line search is performed the next time. For example, this method should be called if the barrier parameter is changed.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.58.3.2 virtual void Ipopt::InexactLSAcceptor::InitThisLineSearch (bool *in_watchdog*) [virtual]

Initialization for the next line search.

The flag *in_watchdog* indicates if we are currently in an active watchdog procedure. Here is where the penalty parameter is updated.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.58.3.3 virtual void Ipopt::InexactLSAcceptor::PrepareRestoPhaseStart () [virtual]

Method that is called before the restoration phase is called.

For now, we just terminate if this is called.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.58.3.4 virtual Number Ipopt::InexactLSAcceptor::CalculateAlphaMin () [virtual]

Method returning the lower bound on the trial step sizes.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.58.3.5 virtual bool Ipopt::InexactLSAcceptor::CheckAcceptabilityOfTrialPoint (Number *alpha_primal*) [virtual]

Method for checking if current trial point is acceptable.

It is assumed that the delta information in *ip_data* is the search direction used in criteria. The primal trial point has to be set before the call.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.58.3.6 virtual bool Ipopt::InexactLSAcceptor::TrySecondOrderCorrection (Number *alpha_primal_test*, Number & *alpha_primal*, SmartPtr< IteratesVector > & *actual_delta*) [virtual]

Try a second order correction for the constraints.

For the inexact version, this always returns false because a second order step is too expensive.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.58.3.7 virtual bool Ipopt::InexactLSAcceptor::TryCorrector (Number *alpha_primal_test*, Number & *alpha_primal*, SmartPtr< IteratesVector > & *actual_delta*) [virtual]

Try higher order corrector (for fast local convergence).

In contrast to a second order correction step, which tries to make an unacceptable point acceptable by improving constraint violation, this corrector step is tried even if the regular primal-dual step is acceptable.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.58.3.8 virtual char Ipopt::InexactLSAcceptor::UpdateForNextIteration (Number *alpha_primal_test*) [virtual]

Method for ending the current line search.

When it is called, the internal data should be updates. *alpha_primal_test* is the value of alpha that has been used for in the acceptance test ealier.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.58.3.9 virtual void Ipopt::InexactLSAcceptor::StartWatchDog () [virtual]

Method for setting internal data if the watchdog procedure is started.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.58.3.10 virtual void Ipopt::InexactLSAcceptor::StopWatchDog () [virtual]

Method for setting internal data if the watchdog procedure is stopped.

Implements [Ipopt::BacktrackingLSAcceptor](#).

The documentation for this class was generated from the following file:


- IpInexactLSAcceptor.hpp

3.59 Ipopt::InexactNewtonNormalStep Class Reference

Compute the "Newton" normal step from the (slack-scaled) augmented system.

```
#include <IpInexactNewtonNormal.hpp>
```

Inheritance diagram for Ipopt::InexactNewtonNormalStep:

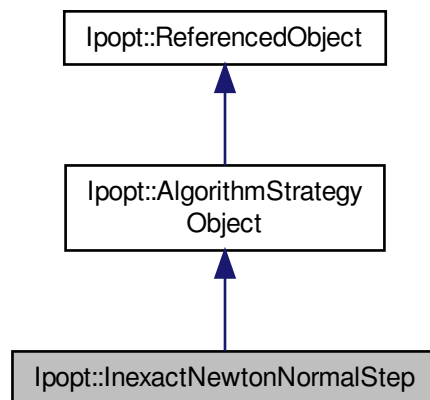

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)

overloaded from [AlgorithmStrategyObject](#)

- virtual bool [ComputeNewtonNormalStep](#) ([Vector](#) &newton_x, [Vector](#) &newton_s)
Method for computing the normal step.

Constructors/Destructors

- [InexactNewtonNormalStep](#) ([SmartPtr](#)< [AugSystemSolver](#) > aug_solver)
Default onstructor.
- virtual [~InexactNewtonNormalStep](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Protected Member Functions

- [InexactData](#) & [InexData](#) ()
Method to easily access Inexact data.
- [InexactCq](#) & [InexCq](#) ()
Method to easily access Inexact calculated quantities.

3.59.1 Detailed Description

Compute the "Newton" normal step from the (slack-scaled) augmented system.

Definition at line 21 of file IpInexactNewtonNormal.hpp.

3.59.2 Member Function Documentation

3.59.2.1 virtual bool Ipopt::InexactNewtonNormalStep::ComputeNewtonNormalStep ([Vector](#) & newton_x, [Vector](#) & newton_s)
[virtual]

Method for computing the normal step.

The computed step is returned as normal_x and normal_s, for the x and s variables, respectively. These quantities are not in the original space, but in the space scaled by the slacks. If the step cannot be computed, this method returns false.

The documentation for this class was generated from the following file:


- IpInexactNewtonNormal.hpp

3.60 Ipopt::InexactNormalStepCalculator Class Reference

Base class for computing the normal step for the inexact step calculation algorithm.

```
#include <IpInexactNormalStepCalc.hpp>
```

Inheritance diagram for Ipopt::InexactNormalStepCalculator:

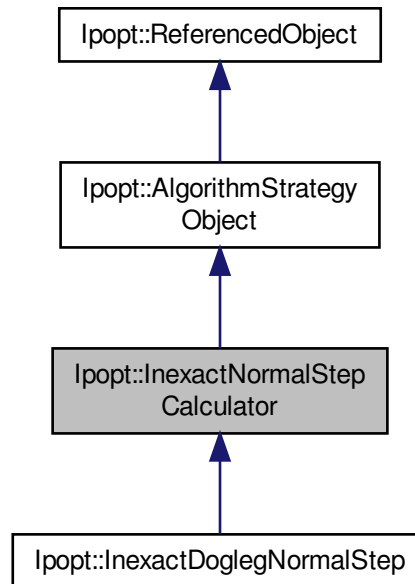

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [ComputeNormalStep](#) ([SmartPtr](#)< [Vector](#) > &normal_x, [SmartPtr](#)< [Vector](#) > &normal_s)=0
Method for computing the normal step.

Constructors/Destructors

- [InexactNormalStepCalculator](#) ()
Default onstructor.
- virtual [~InexactNormalStepCalculator](#) ()
Default destructor.

Protected Member Functions

- [InexactData](#) & [InexData](#) ()
Method to easily access Inexact data.
- [InexactCq](#) & [InexCq](#) ()
Method to easily access Inexact calculated quantities.

3.60.1 Detailed Description

Base class for computing the normal step for the inexact step calculation algorithm.

Definition at line 20 of file IpInexactNormalStepCalc.hpp.

3.60.2 Member Function Documentation

3.60.2.1 `virtual bool Ipopt::InexactNormalStepCalculator::ComputeNormalStep ( SmartPtr< Vector > & normal_x, SmartPtr< Vector > & normal_s ) [pure virtual]`

Method for computing the normal step.

The computed step is returned as normal_x and normal_s, for the x and s variables, respectively. These quantities are not slack-scaled. If the step cannot be computed, this method returns false.

Implemented in [Ipopt::InexactDoglegNormalStep](#).

The documentation for this class was generated from the following file:


- IpInexactNormalStepCalc.hpp

3.61 Ipopt::InexactNormalTerminationTester Class Reference

This class implements the termination tests for the primal-dual system.

```
#include <IpInexactNormalTerminationTester.hpp>
```

Inheritance diagram for Ipopt::InexactNormalTerminationTester:

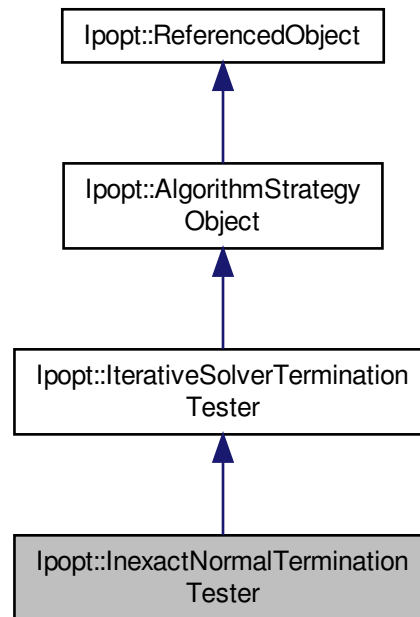

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
Implementation of the initialization method that has to be overloaded by for each derived class.
- virtual bool [InitializeSolve](#) ()
Method for initializing for the next iterative solve.
- virtual [ETerminationTest](#) [TestTermination](#) (Index ndim, const Number *sol, const Number *resid, Index iter, Number norm2_rhs)
This method checks if the current solution of the iterative linear solver is good enough (by returning the corresponding satisfied termination test), or if the Hessian should be modified.
- virtual void [Clear](#) ()
This method can be called after the Solve is over and we can delete anything that has been allocated to free memory.
- virtual Index [GetSolverIterations](#) () const
Return the number of iterative solver iteration from the most recent solve.
- void [Set_c_Avc_norm_cauchy](#) (Number c_Avc_norm_cauchy)
Method for setting the normal problem objective function value at the Cauchy step.

/Destructor

- [InexactNormalTerminationTester](#) ()
Default constructor.
- virtual [~InexactNormalTerminationTester](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members

3.61.1 Detailed Description

This class implements the termination tests for the primal-dual system.

Definition at line 20 of file `IpInexactNormalTerminationTester.hpp`.

3.61.2 Member Function Documentation

3.61.2.1 virtual bool `Ipopt::InexactNormalTerminationTester::InitializeImpl ( const OptionsList & options, const std::string & prefix )` [virtual]

Implementation of the initialization method that has to be overloaded by for each derived class.

Implements [Ipopt::IterativeSolverTerminationTester](#).

3.61.2.2 virtual bool `Ipopt::InexactNormalTerminationTester::InitializeSolve ( )` [virtual]

Method for initializing for the next iterative solve.

This must be call before the test methods are called.

Implements [Ipopt::IterativeSolverTerminationTester](#).

3.61.2.3 virtual ETerminationTest `Ipopt::InexactNormalTerminationTester::TestTermination ( Index ndim, const Number * sol, const Number * resid, Index iter, Number norm2_rhs )` [virtual]

This method checks if the current soltion of the iterative linear solver is good enough (by returning the corresponding satisfied termination test), or if the Hessian should be modified.

The input is the dimension of the augmented system, the current solution vector of the augmented system, the current residual vector.

Implements [Ipopt::IterativeSolverTerminationTester](#).

3.61.2.4 virtual void `Ipopt::InexactNormalTerminationTester::Clear ( )` [virtual]

This method can be called after the Solve is over and we can delete anything that has been allocated to free memory.

Implements [Ipopt::IterativeSolverTerminationTester](#).

3.61.2.5 void `Ipopt::InexactNormalTerminationTester::Set_c_Avc_norm_cauchy ( Number c_Avc_norm_cauchy )` [inline]

Method for setting the normal problem objective function value at the Cauchy step.

This must be called by the Dogleg object.

Definition at line 71 of file `IpInexactNormalTerminationTester.hpp`.

The documentation for this class was generated from the following file:


- `IpInexactNormalTerminationTester.hpp`

3.62 Ipopt::InexactPDSolver Class Reference

This is the implementation of the Primal-Dual System, allowing the usage of an inexact linear solver.

```
#include <IpInexactPDSolver.hpp>
```

Inheritance diagram for Ipopt::InexactPDSolver:

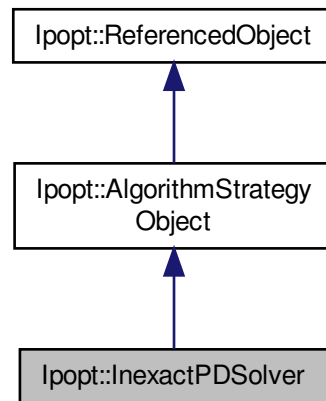

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
Implementation of the initialization method that has to be overloaded by for each derived class.
- virtual bool [Solve](#) (const [IteratesVector](#) &rhs, [IteratesVector](#) &sol)
Solve the primal dual system, given one right hand side.

/Destructor

- [InexactPDSolver](#) ([AugSystemSolver](#) &augSysSolver, [PDPerturbationHandler](#) &perturbHandler)
Constructor that takes in the Augmented System solver that is to be used inside.
- virtual [~InexactPDSolver](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members

3.62.1 Detailed Description

This is the implementation of the Primal-Dual System, allowing the usage of an inexact linear solver.

The step computed is usually for the tangential step.

Definition at line 24 of file IpInexactPDSolver.hpp.

3.62.2 Member Function Documentation

3.62.2.1 `bool Ipopt::InexactPDSolver::InitializeImpl ( const OptionsList & options, const std::string & prefix ) [virtual]`

Implementation of the initialization method that has to be overloaded by for each derived class.

Implements [Ipopt::AlgorithmStrategyObject](#).

The documentation for this class was generated from the following file:


- IpInexactPDSolver.hpp

3.63 Ipopt::InexactPDTerminationTester Class Reference

This class implements the termination tests for the primal-dual system.

```
#include <IpInexactPDTerminationTester.hpp>
```

Inheritance diagram for Ipopt::InexactPDTerminationTester:

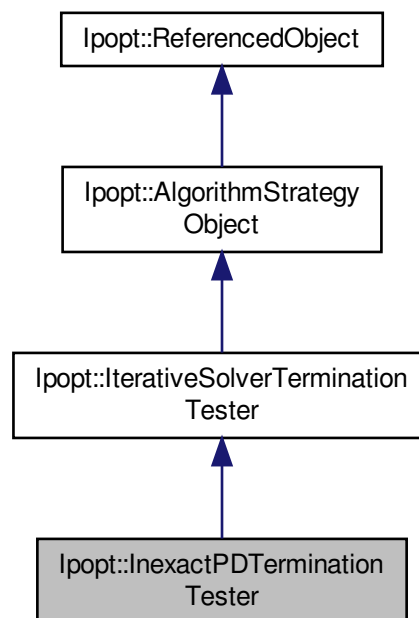

Public Member Functions

- virtual bool `InitializeImpl` (const [OptionsList](#) &options, const std::string &prefix)

Implementation of the initialization method that has to be overloaded by for each derived class.

- virtual bool [InitializeSolve](#) ()

Method for initializing for the next iterative solve.

- virtual [ETerminationTest TestTermination](#) (Index ndim, const Number *sol, const Number *resid, Index iter, Number norm2_rhs)

This method checks if the current solution of the iterative linear solver is good enough (by returning the corresponding satisfied termination test), or if the Hessian should be modified.

- virtual void [Clear](#) ()

This method can be called after the Solve is over and we can delete anything that has been allocated to free memory.

- virtual Index [GetSolverIterations](#) () const

Return the number of iterative solver iteration from the most recent solve.

/Destructor

- [InexactPDTerminationTester](#) ()

Default constructor.

- virtual [~InexactPDTerminationTester](#) ()

Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)

Methods for IpoptType.

Additional Inherited Members

3.63.1 Detailed Description

This class implements the termination tests for the primal-dual system.

Definition at line 20 of file `IpInexactPDTerminationTester.hpp`.

3.63.2 Member Function Documentation

3.63.2.1 virtual bool `Ipopt::InexactPDTerminationTester::InitializeImpl ( const OptionsList & options, const std::string & prefix )`
[virtual]

Implementation of the initialization method that has to be overloaded by for each derived class.

Implements [Ipopt::IterativeSolverTerminationTester](#).

3.63.2.2 virtual bool `Ipopt::InexactPDTerminationTester::InitializeSolve ( )` [virtual]

Method for initializing for the next iterative solve.

This must be call before the test methods are called.

Implements [Ipopt::IterativeSolverTerminationTester](#).

3.63.2.3 `virtual ETerminationTest Ipopt::InexactPDTerminationTester::TestTermination ( Index ndim, const Number * sol, const Number * resid, Index iter, Number norm2_rhs ) [virtual]`

This method checks if the current solution of the iterative linear solver is good enough (by returning the corresponding satisfied termination test), or if the Hessian should be modified.

The input is the dimension of the augmented system, the current solution vector of the augmented system, the current residual vector.

Implements [Ipopt::IterativeSolverTerminationTester](#).

3.63.2.4 `virtual void Ipopt::InexactPDTerminationTester::Clear ( ) [virtual]`

This method can be called after the Solve is over and we can delete anything that has been allocated to free memory.

Implements [Ipopt::IterativeSolverTerminationTester](#).

The documentation for this class was generated from the following file:


- IpInexactPDTerminationTester.hpp

3.64 Ipopt::InexactSearchDirCalculator Class Reference

Implementation of the search direction calculator that computes the search direction using iterative linear solvers.

```
#include <IpInexactSearchDirCalc.hpp>
```

Inheritance diagram for Ipopt::InexactSearchDirCalculator:

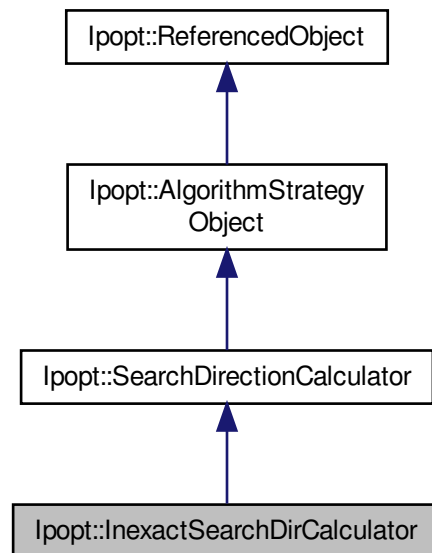

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [ComputeSearchDirection](#) ()
Method for computing the search direction.

Constructors/Destructors

- [InexactSearchDirCalculator](#) ([SmartPtr](#)< [InexactNormalStepCalculator](#) > normal_step_calculator, [SmartPtr](#)< [InexactPDSolver](#) > inexact_pd_solver)
Constructor.
- virtual [~InexactSearchDirCalculator](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members**3.64.1 Detailed Description**

Implementation of the search direction calculator that computes the search direction using iterative linear solvers.

Those steps do not necessarily satisfy the linearized KKT conditions with high accuracy.

Definition at line 24 of file `IpInexactSearchDirCalc.hpp`.

3.64.2 Member Function Documentation**3.64.2.1 virtual bool Ipopt::InexactSearchDirCalculator::ComputeSearchDirection () [virtual]**

Method for computing the search direction.

In this version, we compute a normal and a tangential component, which are stored in the [InexactData](#) object. The overall step is still stored in the [IpoptData](#) object.

Implements [Ipopt::SearchDirectionCalculator](#).

The documentation for this class was generated from the following file:


- `IpInexactSearchDirCalc.hpp`

3.65 Ipopt::InexactTSymScalingMethod Class Reference

Class for the method for computing scaling factors for symmetric matrices in triplet format, specifically for the inexact algorithm.

```
#include <IpInexactTSymScalingMethod.hpp>
```

Inheritance diagram for Ipopt::InexactTSymScalingMethod:

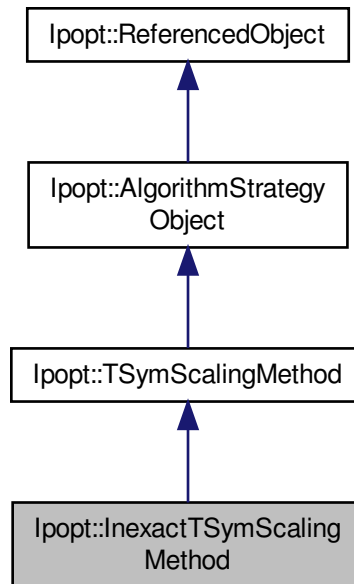

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [ComputeSymTScalingFactors](#) (Index n, Index nnz, const ipfint *airn, const ipfint *ajcn, const double *a, double *scaling_factors)
Method for computing the symmetric scaling factors, given the symmetric matrix in triplet (MA27) format.

Constructor/Destructor

- **InexactTSymScalingMethod** ()
- virtual **~InexactTSymScalingMethod** ()

Additional Inherited Members

3.65.1 Detailed Description

Class for the method for computing scaling factors for symmetric matrices in triplet format, specifically for the inexact algorithm.

The scaling is only considering the current slacks.

Definition at line 24 of file `IpInexactTSymScalingMethod.hpp`.

3.65.2 Member Function Documentation

3.65.2.1 `virtual bool Ipopt::InexactTSymScalingMethod::ComputeSymTScalingFactors ( Index n, Index nnz, const ipfint * airn, const ipfint * ajcn, const double * a, double * scaling_factors ) [virtual]`

Method for computing the symmetric scaling factors, given the symmetric matrix in triplet (MA27) format.

The documentation for this class was generated from the following file:


- `IpInexactTSymScalingMethod.hpp`

3.66 Ipopt::IpoptAdditionalCq Class Reference

Base class for additional calculated quantities that is special to a particular type of algorithm, such as the CG penalty function, or using iterative linear solvers.

```
#include <IpIpoptCalculatedQuantities.hpp>
```

Inheritance diagram for `Ipopt::IpoptAdditionalCq`:

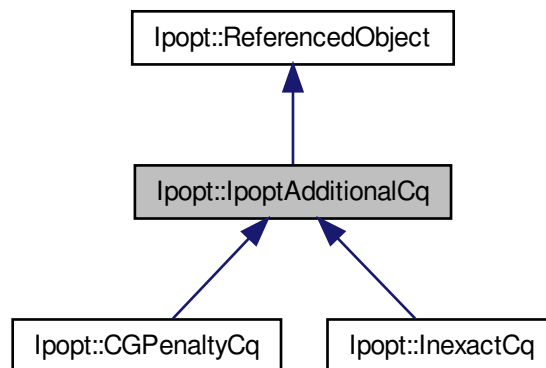

Public Member Functions

- `virtual bool Initialize (const Journalist &jnlst, const OptionsList &options, const std::string &prefix)=0`
This method is called to initialize the global algorithmic parameters.

Constructors/Destructors

- `IpoptAdditionalCq ()`
Default Constructor.
- `virtual ~IpoptAdditionalCq ()`
Default destructor.

3.66.1 Detailed Description

Base class for additional calculated quantities that is special to a particular type of algorithm, such as the CG penalty function, or using iterative linear solvers.

The regular [IpoptCalculatedQuantities](#) object should be given a derivation of this base class when it is created.

Definition at line 40 of file `IpoptCalculatedQuantities.hpp`.

3.66.2 Member Function Documentation

3.66.2.1 `virtual bool Ipopt::IpoptAdditionalCq::Initialize ( const Journalist & jnlst, const OptionsList & options, const std::string & prefix ) [pure virtual]`

This method is called to initialize the global algorithmic parameters.

The parameters are taken from the [OptionsList](#) object.

Implemented in [Ipopt::InexactCq](#), and [Ipopt::CGPenaltyCq](#).

The documentation for this class was generated from the following file:


- `IpoptCalculatedQuantities.hpp`

3.67 Ipopt::IpoptAdditionalData Class Reference

Base class for additional data that is special to a particular type of algorithm, such as the CG penalty function, or using iterative linear solvers.

```
#include <IpIpoptData.hpp>
```

Inheritance diagram for `Ipopt::IpoptAdditionalData`:

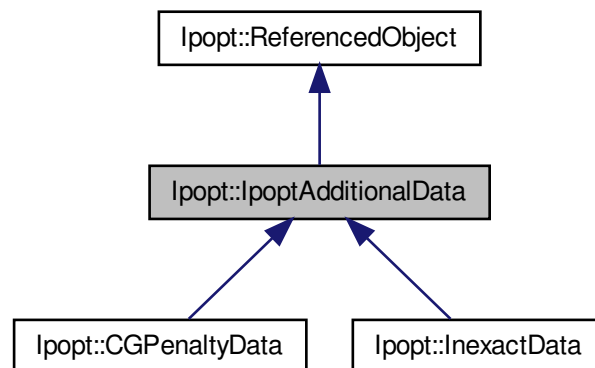

Public Member Functions

- virtual bool [Initialize](#) (const [Journalist](#) &jnlst, const [OptionsList](#) &options, const std::string &prefix)=0

This method is called to initialize the global algorithmic parameters.

- virtual bool [InitializeDataStructures](#) ()=0

Initialize Data Structures at the beginning.

- virtual void [AcceptTrialPoint](#) ()=0

Do whatever is necessary to accept a trial point as current iterate.

Constructors/Destructors

- [IpoptAdditionalData](#) ()

Default Constructor.

- virtual [~IpoptAdditionalData](#) ()

Default destructor.

3.67.1 Detailed Description

Base class for additional data that is special to a particular type of algorithm, such as the CG penalty function, or using iterative linear solvers.

The regular [IpoptData](#) object should be given a derivation of this base class when it is created.

Definition at line 28 of file `IpIpoptData.hpp`.

3.67.2 Member Function Documentation

3.67.2.1 virtual bool `Ipopt::IpoptAdditionalData::Initialize ( const Journalist & jnlst, const OptionsList & options, const std::string & prefix )` [pure virtual]

This method is called to initialize the global algorithmic parameters.

The parameters are taken from the [OptionsList](#) object.

Implemented in [Ipopt::CGPenaltyData](#), and [Ipopt::InexactData](#).

3.67.2.2 virtual bool `Ipopt::IpoptAdditionalData::InitializeDataStructures ( )` [pure virtual]

Initialize Data Structures at the beginning.

Implemented in [Ipopt::CGPenaltyData](#), and [Ipopt::InexactData](#).

3.67.2.3 virtual void `Ipopt::IpoptAdditionalData::AcceptTrialPoint ( )` [pure virtual]

Do whatever is necessary to accept a trial point as current iterate.

This is also used to finish an iteration, i.e., to release memory, and to reset any flags for a new iteration.

Implemented in [Ipopt::CGPenaltyData](#), and [Ipopt::InexactData](#).

The documentation for this class was generated from the following file:


- `IpIpoptData.hpp`

3.68 Ipopt::IpoptAlgorithm Class Reference

The main ipopt algorithm class.

```
#include <IpIpoptAlg.hpp>
```

Inheritance diagram for Ipopt::IpoptAlgorithm:

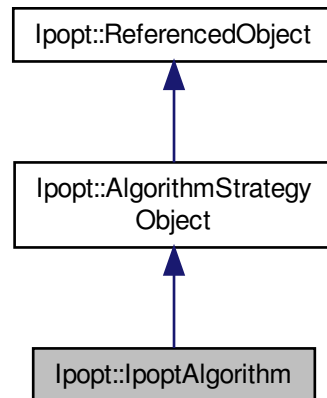

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- SolverReturn [Optimize](#) (bool isResto=false)
Main solve method.

Constructors/Destructors

- [IpoptAlgorithm](#) (const [SmartPtr](#)< [SearchDirectionCalculator](#) > &search_dir_calculator, const [SmartPtr](#)< [LineSearch](#) > &line_search, const [SmartPtr](#)< [MuUpdate](#) > &mu_update, const [SmartPtr](#)< [ConvergenceCheck](#) > &conv_check, const [SmartPtr](#)< [IterateInitializer](#) > &iterate_initializer, const [SmartPtr](#)< [IterationOutput](#) > &iter_output, const [SmartPtr](#)< [HessianUpdater](#) > &hessian_updater, const [SmartPtr](#)< [EqMultiplierCalculator](#) > &eq_multiplier_calculator=NULL)
Constructor.
- virtual [~IpoptAlgorithm](#) ()
Default destructor.

Access to internal strategy objects

- [SmartPtr](#)
< [SearchDirectionCalculator](#) > [SearchDirCalc](#) ()

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members

3.68.1 Detailed Description

The main ipopt algorithm class.

Main Ipopt algorithm class, contains the main optimize method, handles the execution of the optimization. The constructor initializes the data structures through the nlp, and the Optimize method then assumes that everything is initialized and ready to go. After an optimization is complete, the user can access the solution through the passed in ip_data structure. Multiple calls to the Optimize method are allowed as long as the structure of the problem remains the same (i.e. starting point or nlp parameter changes only).

Definition at line 45 of file IpIpoptAlg.hpp.

3.68.2 Constructor & Destructor Documentation

3.68.2.1 Ipopt::IpoptAlgorithm::IpoptAlgorithm (const SmartPtr< SearchDirectionCalculator > & search_dir_calculator, const SmartPtr< LineSearch > & line_search, const SmartPtr< MuUpdate > & mu_update, const SmartPtr< ConvergenceCheck > & conv_check, const SmartPtr< Iteratelnitializer > & iterate_initializer, const SmartPtr< IterationOutput > & iter_output, const SmartPtr< HessianUpdater > & hessian_updater, const SmartPtr< EqMultiplierCalculator > & eq_multiplier_calculator = NULL)

Constructor.

(The [IpoptAlgorithm](#) uses smart pointers for these passed-in pieces to make sure that a user of IpoptAlgorithm cannot pass in an object created on the stack!)

3.68.3 Member Function Documentation

3.68.3.1 SolverReturn Ipopt::IpoptAlgorithm::Optimize (bool isResto = false)

Main solve method.

The documentation for this class was generated from the following file:


- IpIpoptAlg.hpp

3.69 Ipopt::IpoptApplication Class Reference

This is the main application class for making calls to Ipopt.

```
#include <IpIpoptApplication.hpp>
```

Inheritance diagram for Ipopt::IpoptApplication:



Public Member Functions

- `IpoptApplication (SmartPtr< RegisteredOptions > reg_options, SmartPtr< OptionsList > options, SmartPtr< Journalist > jnlst)`
Another constructor that assumes that the code in the (default) constructor has already been executed.
- `virtual SmartPtr< IpoptApplication > clone ()`
Method for creating a new IpoptApplication that uses the same journalist and registered options, and a copy of the options list.
- `virtual ApplicationReturnStatus Initialize (std::istream &is)`
Initialization method.
- `virtual ApplicationReturnStatus Initialize (std::string params_file)`
Initialization method.
- `virtual ApplicationReturnStatus Initialize ()`
Initialize method.
- `virtual bool OpenOutputFile (std::string file_name, EJournalLevel print_level)`
Method for opening an output file with given print_level.
- `void PrintCopyrightMessage ()`
Method for printing Ipopt copyright message now instead of just before the optimization.
- `void RethrowNonIpoptException (bool dorethrow)`
Method to set whether non-ipopt non-bad_alloc exceptions are rethrown by Ipopt.

Solve methods

- `virtual ApplicationReturnStatus OptimizeTNLP (const SmartPtr< TNLP > &tnlp)`
Solve a problem that inherits from TNLP.
- `virtual ApplicationReturnStatus OptimizeNLP (const SmartPtr< NLP > &nlp)`
Solve a problem that inherits from NLP.
- `virtual ApplicationReturnStatus OptimizeNLP (const SmartPtr< NLP > &nlp, SmartPtr< AlgorithmBuilder > &alg_builder)`
Solve a problem that inherits from NLP.
- `virtual ApplicationReturnStatus ReOptimizeTNLP (const SmartPtr< TNLP > &tnlp)`
Solve a problem (that inherits from TNLP) for a repeated time.

- virtual ApplicationReturnStatus [ReOptimizeNLP](#) (const [SmartPtr](#)< [NLP](#) > &nlp)
Solve a problem (that inherits from [NLP](#)) for a repeated time.

Accessor methods

- virtual [SmartPtr](#)< [Journalist](#) > [Jnlst](#) ()
Get the [Journalist](#) for printing output.
- virtual [SmartPtr](#)
< [RegisteredOptions](#) > [RegOptions](#) ()
Get a pointer to [RegisteredOptions](#) object to add new options.
- virtual [SmartPtr](#)< [OptionsList](#) > [Options](#) ()
Get the options list for setting options.
- virtual [SmartPtr](#)< const
[OptionsList](#) > [Options](#) () const
Get the options list for setting options (const version)
- virtual [SmartPtr](#)< [SolveStatistics](#) > [Statistics](#) ()
Get the object with the statistics about the most recent optimization run.
- virtual [SmartPtr](#)< [IpoptNLP](#) > [IpoptNLPObject](#) ()
Get the [IpoptNLP](#) Object.
- [SmartPtr](#)< [IpoptData](#) > [IpoptDataObject](#) ()
Get the [IpoptData](#) Object.
- virtual [SmartPtr](#)
< [IpoptCalculatedQuantities](#) > [IpoptCQObject](#) ()
Get the [IpoptCQ](#) Object.
- [SmartPtr](#)< [IpoptAlgorithm](#) > [AlgorithmObject](#) ()
Get the [Algorithm](#) Object.

Static Public Member Functions

- static void [RegisterAllIpoptOptions](#) (const [SmartPtr](#)< [RegisteredOptions](#) > &roptions)
Method to registering all [Ipopt](#) options.

Methods for IpoptTypeInfo

- static void **RegisterOptions** ([SmartPtr](#)< [RegisteredOptions](#) > roptions)

3.69.1 Detailed Description

This is the main application class for making calls to Ipopt.

Definition at line 47 of file IpoptApplication.hpp.

3.69.2 Member Function Documentation

3.69.2.1 virtual [SmartPtr](#)<[IpoptApplication](#)> [Ipopt::IpoptApplication::clone](#) () [virtual]

Method for creating a new [IpoptApplication](#) that uses the same journalist and registered options, and a copy of the options

list.

3.69.2.2 virtual ApplicationReturnStatus Ipopt::IpoptApplication::Initialize (std::istream & *is*) [virtual]

Initialization method.

This method reads options from the input stream and initializes the journalists. It returns something other than Solve_ Succeeded if there was a problem in the initialization (such as an invalid option). You should call one of the initialization methods at some point before the first optimize call.

3.69.2.3 virtual ApplicationReturnStatus Ipopt::IpoptApplication::Initialize (std::string *params_file*) [virtual]

Initialization method.

This method reads options from the params file and initializes the journalists. It returns something other than Solve_ Succeeded if there was a problem in the initialization (such as an invalid option). You should call one of the initialization methods at some point before the first optimize call. Note: You can skip the processing of a params file by setting *params_file* to "".

3.69.2.4 virtual ApplicationReturnStatus Ipopt::IpoptApplication::Initialize () [virtual]

Initialize method.

This method reads the options file specified by the *option_file_name* option and initializes the journalists. You should call this method at some point before the first optimize call. It returns something other than Solve_ Succeeded if there was a problem in the initialization (such as an invalid option).

3.69.2.5 virtual ApplicationReturnStatus Ipopt::IpoptApplication::ReOptimizeTNLP (const SmartPtr< TNLP > & *tnlp*) [virtual]

Solve a problem (that inherits from [TNLP](#)) for a repeated time.

The OptimizeTNLP method must have been called before. The [TNLP](#) must be the same object, and the structure (number of variables and constraints and position of nonzeros in Jacobian and Hessian must be the same).

3.69.2.6 virtual ApplicationReturnStatus Ipopt::IpoptApplication::ReOptimizeNLP (const SmartPtr< NLP > & *nlp*) [virtual]

Solve a problem (that inherits from [NLP](#)) for a repeated time.

The OptimizeNLP method must have been called before. The [NLP](#) must be the same object, and the structure (number of variables and constraints and position of nonzeros in Jacobian and Hessian must be the same).

3.69.2.7 virtual bool Ipopt::IpoptApplication::OpenOutputFile (std::string *file_name*, EJournalLevel *print_level*) [virtual]

Method for opening an output file with given *print_level*.

Returns false if there was a problem.

3.69.2.8 virtual SmartPtr< SolveStatistics > Ipopt::IpoptApplication::Statistics () [virtual]

Get the object with the statistics about the most recent optimization run.

3.69.2.9 void Ipopt::IpoptApplication::PrintCopyrightMessage ()

Method for printing Ipopt copyright message now instead of just before the optimization.

If you want to have the copy right message printed earlier than by default, call this method at the convenient time.

3.69.2.10 void Ipopt::IpoptApplication::RethrowNonIpoptException (bool *dorethrow*) [inline]

Method to set whether non-ipopt non-bad_alloc exceptions are rethrown by Ipopt.

By default, non-`Ipopt` and non-`std::bad_alloc` exceptions are caught by `Ipopt`s initialization and optimization methods and the status `NonIpopt_Exception_Thrown` is returned. This function allows to enable rethrowing of such exceptions.

Definition at line 180 of file `IpIpoptApplication.hpp`.

```
3.69.2.11 static void Ipopt::IpoptApplication::RegisterAllIpoptOptions ( const SmartPtr< RegisteredOptions > & roptions )
[static]
```

Method to registering all `Ipopt` options.

The documentation for this class was generated from the following file:


- `IpIpoptApplication.hpp`

3.70 Ipopt::IpoptCalculatedQuantities Class Reference

Class for all IPOPT specific calculated quantities.

```
#include <IpIpoptCalculatedQuantities.hpp>
```

Inheritance diagram for `Ipopt::IpoptCalculatedQuantities`:

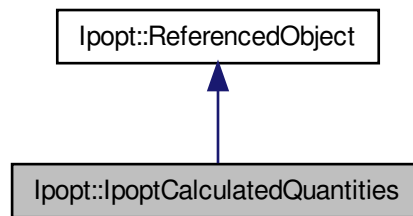

Public Member Functions

- void `SetAddCq` (`SmartPtr< IpoptAdditionalCq >` add_cq)
Method for setting pointer for additional calculated quantities.
- bool `HaveAddCq` ()
Method detecting if additional object for calculated quantities has already been set.
- bool `Initialize` (const `Journalist` &jnlst, const `OptionsList` &options, const `std::string` &prefix)
This method must be called to initialize the global algorithmic parameters.
- Number `curr_avrg_compl` ()
average of current values of the complementarities
- Number `trial_avrg_compl` ()
average of trial values of the complementarities
- Number `curr_gradBarrTDelta` ()
inner_product of current barrier obj.
- Number `CalcNormOfType` (`ENormType` NormType, `std::vector< SmartPtr< const Vector > >` vecs)

Compute the norm of a specific type of a set of vectors (uncached)

- Number [CalcNormOfType](#) (ENormType NormType, const [Vector](#) &vec1, const [Vector](#) &vec2)

Compute the norm of a specific type of two vectors (uncached)

- ENormType [constr_viol_normtype](#) () const

Norm type used for calculating constraint violation.

- bool [IsSquareProblem](#) () const

Method returning true if this is a square problem.

- [SmartPtr](#)< [IpoptNLP](#) > & [GetIpoptNLP](#) ()

Method returning the [IpoptNLP](#) object.

Constructors/Destructors

- [IpoptCalculatedQuantities](#) (const [SmartPtr](#)< [IpoptNLP](#) > &ip_nlp, const [SmartPtr](#)< [IpoptData](#) > &ip_data)

Constructor.

- virtual [~IpoptCalculatedQuantities](#) ()

Default destructor.

Slacks

- [SmartPtr](#)< const [Vector](#) > [curr_slack_x_L](#) ()

Slacks for x_L (at current iterate)

- [SmartPtr](#)< const [Vector](#) > [curr_slack_x_U](#) ()

Slacks for x_U (at current iterate)

- [SmartPtr](#)< const [Vector](#) > [curr_slack_s_L](#) ()

Slacks for s_L (at current iterate)

- [SmartPtr](#)< const [Vector](#) > [curr_slack_s_U](#) ()

Slacks for s_U (at current iterate)

- [SmartPtr](#)< const [Vector](#) > [trial_slack_x_L](#) ()

Slacks for x_L (at trial point)

- [SmartPtr](#)< const [Vector](#) > [trial_slack_x_U](#) ()

Slacks for x_U (at trial point)

- [SmartPtr](#)< const [Vector](#) > [trial_slack_s_L](#) ()

Slacks for s_L (at trial point)

- [SmartPtr](#)< const [Vector](#) > [trial_slack_s_U](#) ()

Slacks for s_U (at trial point)

- Index [AdjustedTrialSlacks](#) ()

Indicating whether or not we "fudged" the slacks.

- void [ResetAdjustedTrialSlacks](#) ()

Reset the flags for "fudged" slacks.

Objective function

- virtual Number [curr_f](#) ()

Value of objective function (at current point)

- virtual Number [unscaled_curr_f](#) ()

Unscaled value of the objective function (at the current point)

- virtual Number [trial_f](#) ()

Value of objective function (at trial point)

- virtual Number [unscaled_trial_f](#) ()

Unscaled value of the objective function (at the trial point)

- [SmartPtr](#)< const [Vector](#) > [curr_grad_f](#) ()

Gradient of objective function (at current point)

- `SmartPtr< const Vector > trial_grad_f ()`

Gradient of objective function (at trial point)

Barrier Objective Function

- virtual Number `curr_barrier_obj ()`

Barrier Objective Function Value (at current iterate with current mu)

- virtual Number `trial_barrier_obj ()`

Barrier Objective Function Value (at trial point with current mu)

- `SmartPtr< const Vector > curr_grad_barrier_obj_x ()`

Gradient of barrier objective function with respect to x (at current point with current mu)

- `SmartPtr< const Vector > curr_grad_barrier_obj_s ()`

Gradient of barrier objective function with respect to s (at current point with current mu)

- `SmartPtr< const Vector > grad_kappa_times_damping_x ()`

Gradient of the damping term with respect to x (times kappa_d)

- `SmartPtr< const Vector > grad_kappa_times_damping_s ()`

Gradient of the damping term with respect to s (times kappa_d)

Constraints

- `SmartPtr< const Vector > curr_c ()`

c(x) (at current point)

- `SmartPtr< const Vector > unscaled_curr_c ()`

unscaled c(x) (at current point)

- `SmartPtr< const Vector > trial_c ()`

c(x) (at trial point)

- `SmartPtr< const Vector > unscaled_trial_c ()`

unscaled c(x) (at trial point)

- `SmartPtr< const Vector > curr_d ()`

d(x) (at current point)

- `SmartPtr< const Vector > unscaled_curr_d ()`

unscaled d(x) (at current point)

- `SmartPtr< const Vector > trial_d ()`

d(x) (at trial point)

- `SmartPtr< const Vector > curr_d_minus_s ()`

d(x) - s (at current point)

- `SmartPtr< const Vector > trial_d_minus_s ()`

d(x) - s (at trial point)

- `SmartPtr< const Matrix > curr_jac_c ()`

Jacobian of c (at current point)

- `SmartPtr< const Matrix > trial_jac_c ()`

Jacobian of c (at trial point)

- `SmartPtr< const Matrix > curr_jac_d ()`

Jacobian of d (at current point)

- `SmartPtr< const Matrix > trial_jac_d ()`

Jacobian of d (at trial point)

- `SmartPtr< const Vector > curr_jac_cT_times_vec (const Vector &vec)`

Product of Jacobian (evaluated at current point) of C transpose with general vector.

- `SmartPtr< const Vector > trial_jac_cT_times_vec (const Vector &vec)`

Product of Jacobian (evaluated at trial point) of C transpose with general vector.

- `SmartPtr< const Vector > curr_jac_dT_times_vec (const Vector &vec)`

- Product of Jacobian (evaluated at current point) of D transpose with general vector.*
- `SmartPtr< const Vector > trial_jac_dT_times_vec (const Vector &vec)`
- Product of Jacobian (evaluated at trial point) of D transpose with general vector.*
- `SmartPtr< const Vector > curr_jac_cT_times_curr_y_c ()`
- Product of Jacobian (evaluated at current point) of C transpose with current y_c.*
- `SmartPtr< const Vector > trial_jac_cT_times_trial_y_c ()`
- Product of Jacobian (evaluated at trial point) of C transpose with trial y_c.*
- `SmartPtr< const Vector > curr_jac_dT_times_curr_y_d ()`
- Product of Jacobian (evaluated at current point) of D transpose with current y_d.*
- `SmartPtr< const Vector > trial_jac_dT_times_trial_y_d ()`
- Product of Jacobian (evaluated at trial point) of D transpose with trial y_d.*
- `SmartPtr< const Vector > curr_jac_c_times_vec (const Vector &vec)`
- Product of Jacobian (evaluated at current point) of C with general vector.*
- `SmartPtr< const Vector > curr_jac_d_times_vec (const Vector &vec)`
- Product of Jacobian (evaluated at current point) of D with general vector.*
- `virtual Number curr_constraint_violation ()`
- Constraint Violation (at current iterate).*
- `virtual Number trial_constraint_violation ()`
- Constraint Violation (at trial point).*
- `virtual Number curr_nlp_constraint_violation (ENormType NormType)`
- Real constraint violation in a given norm (at current iterate).*
- `virtual Number unscaled_curr_nlp_constraint_violation (ENormType NormType)`
- Unscaled real constraint violation in a given norm (at current iterate).*
- `virtual Number unscaled_trial_nlp_constraint_violation (ENormType NormType)`
- Unscaled real constraint violation in a given norm (at trial iterate).*

Hessian matrices

- `SmartPtr< const SymMatrix > curr_exact_hessian ()`
- exact Hessian at current iterate (uncached)*

primal-dual error and its components

- `SmartPtr< const Vector > curr_grad_lag_x ()`
- x-part of gradient of Lagrangian function (at current point)*
- `SmartPtr< const Vector > trial_grad_lag_x ()`
- x-part of gradient of Lagrangian function (at trial point)*
- `SmartPtr< const Vector > curr_grad_lag_s ()`
- s-part of gradient of Lagrangian function (at current point)*
- `SmartPtr< const Vector > trial_grad_lag_s ()`
- s-part of gradient of Lagrangian function (at trial point)*
- `SmartPtr< const Vector > curr_grad_lag_with_damping_x ()`
- x-part of gradient of Lagrangian function (at current point) including linear damping term*
- `SmartPtr< const Vector > curr_grad_lag_with_damping_s ()`
- s-part of gradient of Lagrangian function (at current point) including linear damping term*
- `SmartPtr< const Vector > curr_compl_x_L ()`
- Complementarity for x_L (for current iterate)*
- `SmartPtr< const Vector > curr_compl_x_U ()`
- Complementarity for x_U (for current iterate)*
- `SmartPtr< const Vector > curr_compl_s_L ()`
- Complementarity for s_L (for current iterate)*

- [SmartPtr](#)< const [Vector](#) > [curr_compl_s_U](#) ()
Complementarity for s_U (for current iterate)
- [SmartPtr](#)< const [Vector](#) > [trial_compl_x_L](#) ()
Complementarity for x_L (for trial iterate)
- [SmartPtr](#)< const [Vector](#) > [trial_compl_x_U](#) ()
Complementarity for x_U (for trial iterate)
- [SmartPtr](#)< const [Vector](#) > [trial_compl_s_L](#) ()
Complementarity for s_L (for trial iterate)
- [SmartPtr](#)< const [Vector](#) > [trial_compl_s_U](#) ()
Complementarity for s_U (for trial iterate)
- [SmartPtr](#)< const [Vector](#) > [curr_relaxed_compl_x_L](#) ()
Relaxed complementarity for x_L (for current iterate and current μ)
- [SmartPtr](#)< const [Vector](#) > [curr_relaxed_compl_x_U](#) ()
Relaxed complementarity for x_U (for current iterate and current μ)
- [SmartPtr](#)< const [Vector](#) > [curr_relaxed_compl_s_L](#) ()
Relaxed complementarity for s_L (for current iterate and current μ)
- [SmartPtr](#)< const [Vector](#) > [curr_relaxed_compl_s_U](#) ()
Relaxed complementarity for s_U (for current iterate and current μ)
- virtual Number [curr_primal_infeasibility](#) (ENormType NormType)
Primal infeasibility in a given norm (at current iterate).
- virtual Number [trial_primal_infeasibility](#) (ENormType NormType)
Primal infeasibility in a given norm (at trial point)
- virtual Number [curr_dual_infeasibility](#) (ENormType NormType)
Dual infeasibility in a given norm (at current iterate)
- virtual Number [trial_dual_infeasibility](#) (ENormType NormType)
Dual infeasibility in a given norm (at trial iterate)
- virtual Number [unscaled_curr_dual_infeasibility](#) (ENormType NormType)
Unscaled dual infeasibility in a given norm (at current iterate)
- virtual Number [curr_complementarity](#) (Number μ , ENormType NormType)
Complementarity (for all complementarity conditions together) in a given norm (at current iterate)
- virtual Number [trial_complementarity](#) (Number μ , ENormType NormType)
Complementarity (for all complementarity conditions together) in a given norm (at trial iterate)
- virtual Number [unscaled_curr_complementarity](#) (Number μ , ENormType NormType)
*Complementarity (for all complementarity conditions together) in a given norm (at current iterate) without *NLP* scaling.*
- Number [CalcCentralityMeasure](#) (const [Vector](#) &compl_x_L, const [Vector](#) &compl_x_U, const [Vector](#) &compl_s_L, const [Vector](#) &compl_s_U)
Centrality measure (in spirit of the -infinity-neighborhood.
- virtual Number [curr_centrality_measure](#) ()
Centrality measure at current point.
- virtual Number [curr_nlp_error](#) ()
*Total optimality error for the original *NLP* at the current iterate, using scaling factors based on multipliers.*
- virtual Number [unscaled_curr_nlp_error](#) ()
*Total optimality error for the original *NLP* at the current iterate, but using no scaling based on multipliers, and no scaling for the *NLP*.*
- virtual Number [curr_barrier_error](#) ()
Total optimality error for the barrier problem at the current iterate, using scaling factors based on multipliers.
- virtual Number [curr_primal_dual_system_error](#) (Number μ)
Norm of the primal-dual system for a given μ (at current iterate).
- virtual Number [trial_primal_dual_system_error](#) (Number μ)
Norm of the primal-dual system for a given μ (at trial iterate).

Computing fraction-to-the-boundary step sizes

- Number [primal_frac_to_the_bound](#) (Number tau, const [Vector](#) &delta_x, const [Vector](#) &delta_s)
Fraction to the boundary from (current) primal variables x and s for a given step.
- Number [curr_primal_frac_to_the_bound](#) (Number tau)
Fraction to the boundary from (current) primal variables x and s for internal (current) step.
- Number [dual_frac_to_the_bound](#) (Number tau, const [Vector](#) &delta_z_L, const [Vector](#) &delta_z_U, const [Vector](#) &delta_v_L, const [Vector](#) &delta_v_U)
Fraction to the boundary from (current) dual variables z and v for a given step.
- Number [uncached_dual_frac_to_the_bound](#) (Number tau, const [Vector](#) &delta_z_L, const [Vector](#) &delta_z_U, const [Vector](#) &delta_v_L, const [Vector](#) &delta_v_U)
Fraction to the boundary from (current) dual variables z and v for a given step, without caching.
- Number [curr_dual_frac_to_the_bound](#) (Number tau)
Fraction to the boundary from (current) dual variables z and v for internal (current) step.
- Number [uncached_slack_frac_to_the_bound](#) (Number tau, const [Vector](#) &delta_x_L, const [Vector](#) &delta_x_U, const [Vector](#) &delta_s_L, const [Vector](#) &delta_s_U)
Fraction to the boundary from (current) slacks for a given step in the slacks.

Sigma matrices

- [SmartPtr](#)< const [Vector](#) > [curr_sigma_x](#) ()
- [SmartPtr](#)< const [Vector](#) > [curr_sigma_s](#) ()

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

3.70.1 Detailed Description

Class for all IPOPT specific calculated quantities.

Definition at line 81 of file IpoptCalculatedQuantities.hpp.

3.70.2 Member Function Documentation

3.70.2.1 void Ipopt::IpoptCalculatedQuantities::SetAddCq ([SmartPtr](#)< [IpoptAdditionalCq](#) > add_cq) [inline]

Method for setting pointer for additional calculated quantities.

This needs to be called before Initialized.

Definition at line 96 of file IpoptCalculatedQuantities.hpp.

3.70.2.2 bool Ipopt::IpoptCalculatedQuantities::Initialize (const [Journalist](#) & jnlst, const [OptionsList](#) & options, const std::string & prefix)

This method must be called to initialize the global algorithmic parameters.

The parameters are taken from the [OptionsList](#) object.

3.70.2.3 virtual Number Ipopt::IpoptCalculatedQuantities::curr_constraint_violation () [virtual]

Constraint Violation (at current iterate).

This value should be used in the line search, and not [curr_primal_infeasibility\(\)](#). What type of norm is used depends on constr_viol_normtype

3.70.2.4 `virtual Number Ipopt::IpoptCalculatedQuantities::trial_constraint_violation ( ) [virtual]`

Constraint Violation (at trial point).

This value should be used in the line search, and not `curr_primal_infeasibility()`. What type of norm is used depends on `constr_viol_normtype`

3.70.2.5 `virtual Number Ipopt::IpoptCalculatedQuantities::curr_nlp_constraint_violation ( ENormType NormType ) [virtual]`

Real constraint violation in a given norm (at current iterate).

This considers the inequality constraints without slacks.

3.70.2.6 `virtual Number Ipopt::IpoptCalculatedQuantities::unscaled_curr_nlp_constraint_violation ( ENormType NormType ) [virtual]`

Unscaled real constraint violation in a given norm (at current iterate).

This considers the inequality constraints without slacks.

3.70.2.7 `virtual Number Ipopt::IpoptCalculatedQuantities::unscaled_trial_nlp_constraint_violation ( ENormType NormType ) [virtual]`

Unscaled real constraint violation in a given norm (at trial iterate).

This considers the inequality constraints without slacks.

3.70.2.8 `virtual Number Ipopt::IpoptCalculatedQuantities::curr_primal_infeasibility ( ENormType NormType ) [virtual]`

Primal infeasibility in a given norm (at current iterate).

3.70.2.9 `virtual Number Ipopt::IpoptCalculatedQuantities::unscaled_curr_complementarity ( Number mu, ENormType NormType ) [virtual]`

Complementarity (for all complementarity conditions together) in a given norm (at current iterate) without `NLP` scaling.

3.70.2.10 `Number Ipopt::IpoptCalculatedQuantities::CalcCentralityMeasure ( const Vector & compl_x_L, const Vector & compl_x_U, const Vector & compl_s_L, const Vector & compl_s_U )`

Centrality measure (in spirit of the -infinity-neighborhood).

3.70.2.11 `virtual Number Ipopt::IpoptCalculatedQuantities::curr_nlp_error ( ) [virtual]`

Total optimality error for the original `NLP` at the current iterate, using scaling factors based on multipliers.

Note that here the constraint violation is measured without slacks (`nlp_constraint_violation`)

3.70.2.12 `virtual Number Ipopt::IpoptCalculatedQuantities::unscaled_curr_nlp_error ( ) [virtual]`

Total optimality error for the original `NLP` at the current iterate, but using no scaling based on multipliers, and no scaling for the `NLP`.

Note that here the constraint violation is measured without slacks (`nlp_constraint_violation`)

3.70.2.13 `virtual Number Ipopt::IpoptCalculatedQuantities::curr_barrier_error ( ) [virtual]`

Total optimality error for the barrier problem at the current iterate, using scaling factors based on multipliers.

3.70.2.14 `virtual Number Ipopt::IpoptCalculatedQuantities::curr_primal_dual_system_error ( Number mu ) [virtual]`

Norm of the primal-dual system for a given mu (at current iterate).

The norm is defined as the sum of the 1-norms of dual infeasibility, primal infeasibility, and complementarity, all divided by the number of elements of the vectors of which the norm is taken.

3.70.2.15 `virtual Number Ipopt::IpoptCalculatedQuantities::trial_primal_dual_system_error ( Number mu ) [virtual]`

Norm of the primal-dual system for a given mu (at trial iterate).

The norm is defined as the sum of the 1-norms of dual infeasibility, primal infeasibility, and complementarity, all divided by the number of elements of the vectors of which the norm is taken.

3.70.2.16 `Number Ipopt::IpoptCalculatedQuantities::uncached_slack_frac_to_the_bound ( Number tau, const Vector & delta_x_L, const Vector & delta_x_U, const Vector & delta_s_L, const Vector & delta_s_U )`

Fraction to the boundary from (current) slacks for a given step in the slacks.

Usually, one will use the `primal_frac_to_the_bound` method to compute the primal fraction to the boundary step size, but if it is cheaper to provide the steps in the slacks directly (e.g. when the primal step sizes are only temporary), the this method is more efficient. This method does not cache computations.

3.70.2.17 `Number Ipopt::IpoptCalculatedQuantities::curr_gradBarrTDelta ( )`

inner_product of current barrier obj.

fn. gradient with current search direction

3.70.2.18 `SmartPtr<IpoptNLP> & Ipopt::IpoptCalculatedQuantities::GetIpoptNLP ( ) [inline]`

Method returning the `IpoptNLP` object.

This should only be used with care!

Definition at line 447 of file `IpIpoptCalculatedQuantities.hpp`.

3.70.2.19 `static void Ipopt::IpoptCalculatedQuantities::RegisterOptions ( SmartPtr< RegisteredOptions > roptions ) [static]`

Methods for `IpoptType`.

Called by `IpoptType` to register the options

The documentation for this class was generated from the following file:


- `IpIpoptCalculatedQuantities.hpp`

3.71 Ipopt::IpoptData Class Reference

Class to organize all the data required by the algorithm.

```
#include <IpIpoptData.hpp>
```

Inheritance diagram for Ipopt::IpoptData:



Public Member Functions

- bool [InitializeDataStructures](#) ([IpoptNLP](#) &ip_nlp, bool want_x, bool want_y_c, bool want_y_d, bool want_z_L, bool want_z_U)
Initialize Data Structures.
- bool [Initialize](#) (const [Journalist](#) &jnlst, const [OptionsList](#) &options, const std::string &prefix)
This method must be called to initialize the global algorithmic parameters.
- Number [cpu_time_start](#) () const
Cpu time counter at the beginning of the optimization.
- [TimingStatistics](#) & [TimingStats](#) ()
Return Timing Statistics Object.
- bool [HaveAddData](#) ()
Check if additional data has been set.
- [IpoptAdditionalData](#) & [AdditionalData](#) ()
Get access to additional data object.
- void [SetAddData](#) ([SmartPtr](#)< [IpoptAdditionalData](#) > add_data)
Set a new pointer for additional Ipopt data.
- void [setPDPert](#) (Number pd_pert_x, Number pd_pert_s, Number pd_pert_c, Number pd_pert_d)
Set the perturbation of the primal-dual system.
- void [getPDPert](#) (Number &pd_pert_x, Number &pd_pert_s, Number &pd_pert_c, Number &pd_pert_d)
Get the current perturbation of the primal-dual system.

Constructors/Destructors

- [IpoptData](#) ([SmartPtr](#)< [IpoptAdditionalData](#) > add_data=NULL, Number [cpu_time_start](#)=-1.)
Constructor.
- virtual [~IpoptData](#) ()
Default destructor.

Get Methods for Iterates

- [SmartPtr](#)< const [IteratesVector](#) > [curr](#) () const
Current point.

- `SmartPtr< const IteratesVector > trial () const`
Get the current point in a copied container that is non-const.
- `void set_trial (SmartPtr< IteratesVector > &trial)`
Get Trial point in a copied container that is non-const.
- `void SetTrialPrimalVariablesFromStep (Number alpha, const Vector &delta_x, const Vector &delta_s)`
Set the values of the primal trial variables (x and s) from provided Step with step length alpha.
- `void SetTrialEqMultipliersFromStep (Number alpha, const Vector &delta_y_c, const Vector &delta_y_d)`
Set the values of the trial values for the equality constraint multipliers (y_c and y_d) from provided step with step length alpha.
- `void SetTrialBoundMultipliersFromStep (Number alpha, const Vector &delta_z_L, const Vector &delta_z_U, const Vector &delta_v_L, const Vector &delta_v_U)`
Set the value of the trial values for the bound multipliers (z_L, z_U, v_L, v_U) from provided step with step length alpha.
- `SmartPtr< const IteratesVector > delta () const`
ToDo: I may need to add versions of set_trial like the following, but I am not sure.
- `void set_delta (SmartPtr< IteratesVector > &delta)`
Set the current delta - like the trial point, this method copies the pointer for efficiency (no copy and to keep cache tags the same) so after you call set, you cannot modify the data.
- `void set_delta (SmartPtr< const IteratesVector > &delta)`
Set the current delta - like the trial point, this method copies the pointer for efficiency (no copy and to keep cache tags the same) so after you call set, you cannot modify the data.
- `SmartPtr< const IteratesVector > delta_aff () const`
Affine Delta.
- `void set_delta_aff (SmartPtr< IteratesVector > &delta_aff)`
Set the affine delta - like the trial point, this method copies the pointer for efficiency (no copy and to keep cache tags the same) so after you call set, you cannot modify the data.
- `SmartPtr< const SymMatrix > W ()`
Hessian or Hessian approximation (do not hold on to it, it might be changed)
- `void Set_W (SmartPtr< const SymMatrix > W)`
Set Hessian approximation.

("Main") Primal-dual search direction. Those fields are

used to store the search directions computed from solving the primal-dual system, and can be used in the line search.

They are overwritten in every iteration, so do not hold on to the pointers (make copies instead)

- `bool HaveDeltas () const`
Returns true, if the primal-dual step have been already computed for the current iteration.
- `void SetHaveDeltas (bool have_deltas)`
Method for setting the HaveDeltas flag.

Affine-scaling step. Those fields can be used to store

the affine scaling step.

For example, if the method for computing the current barrier parameter computes the affine scaling steps, then the corrector step in the line search does not have to recompute those solutions of the linear system.

- `bool HaveAffineDeltas () const`
Returns true, if the affine-scaling step have been already computed for the current iteration.
- `void SetHaveAffineDeltas (bool have_affine_deltas)`
Method for setting the HaveDeltas flag.

Public Methods for updating iterates

- `void CopyTrialToCurrent ()`

Copy the trial values to the current values.

- void [AcceptTrialPoint](#) ()

Set the current iterate values from the trial values.

General algorithmic data

- Index [iter_count](#) () const
- void [Set_iter_count](#) (Index iter_count)
- Number [curr_mu](#) () const
- void [Set_mu](#) (Number mu)
- bool [Mulinitialized](#) () const
- Number [curr_tau](#) () const
- void [Set_tau](#) (Number tau)
- bool [Taulinitialized](#) () const
- void [SetFreeMuMode](#) (bool free_mu_mode)
- bool [FreeMuMode](#) () const
- void [Set_tiny_step_flag](#) (bool flag)

Setting the flag that indicates if a tiny step (below machine precision) has been detected.

- bool [tiny_step_flag](#) ()

- Number [tol](#) () const

Overall convergence tolerance.

- void [Set_tol](#) (Number tol)

Set a new value for the tolerance.

Information gathered for iteration output

- Number [info_regu_x](#) () const
- void [Set_info_regu_x](#) (Number regu_x)
- Number [info_alpha_primal](#) () const
- void [Set_info_alpha_primal](#) (Number alpha_primal)
- char [info_alpha_primal_char](#) () const
- void [Set_info_alpha_primal_char](#) (char info_alpha_primal_char)
- Number [info_alpha_dual](#) () const
- void [Set_info_alpha_dual](#) (Number alpha_dual)
- Index [info_ls_count](#) () const
- void [Set_info_ls_count](#) (Index ls_count)
- bool [info_skip_output](#) () const
- void [Append_info_string](#) (const std::string &add_str)
- const std::string & [info_string](#) () const
- void [Set_info_skip_output](#) (bool info_skip_output)
- *Set this to true, if the next time when output is written, the summary line should not be printed.*
- Number [info_last_output](#) ()
- *gives time when the last summary output line was printed*
- void [Set_info_last_output](#) (Number info_last_output)
- *sets time when the last summary output line was printed*
- int [info_iters_since_header](#) ()
- *gives number of iteration summaries actually printed since last summary header was printed*
- void [Inc_info_iters_since_header](#) ()
- *increases number of iteration summaries actually printed since last summary header was printed*
- void [Set_info_iters_since_header](#) (int info_iters_since_header)
- *sets number of iteration summaries actually printed since last summary header was printed*
- void [ResetInfo](#) ()
- *Reset all info fields.*

Static Public Member Functions

- static void [RegisterOptions](#) (const [SmartPtr](#)< [RegisteredOptions](#) > &options)
Methods for IpoptType.

3.71.1 Detailed Description

Class to organize all the data required by the algorithm.

Internally, once this Data object has been initialized, all internal curr_ vectors must always be set (so that prototypes are available). The current values can only be set from the trial values. The trial values can be set by copying from a vector or by adding some fraction of a step to the current values. This object also stores steps, which allows to easily communicate the step from the step computation object to the line search object.

Definition at line 83 of file IpoptData.hpp.

3.71.2 Member Function Documentation

3.71.2.1 bool Ipopt::IpoptData::Initialize (const [Journalist](#) & jnlst, const [OptionsList](#) & options, const std::string & prefix)

This method must be called to initialize the global algorithmic parameters.

The parameters are taken from the [OptionsList](#) object.

3.71.2.2 [SmartPtr](#)< const [IteratesVector](#) > Ipopt::IpoptData::trial () const [inline]

Get the current point in a copied container that is non-const.

The entries in the container cannot be modified, but the container can be modified to point to new entries. Get Trial point

Definition at line 698 of file IpoptData.hpp.

3.71.2.3 void Ipopt::IpoptData::set_trial ([SmartPtr](#)< [IteratesVector](#) > & trial) [inline]

Get Trial point in a copied container that is non-const.

The entries in the container can not be modified, but the container can be modified to point to new entries. Set the trial point - this method copies the pointer for efficiency (no copy and to keep cache tags the same) so after you call set you cannot modify the data again

Definition at line 740 of file IpoptData.hpp.

3.71.2.4 [SmartPtr](#)< const [IteratesVector](#) > Ipopt::IpoptData::delta () const [inline]

ToDo: I may need to add versions of set_trial like the following, but I am not sure.

get the current delta

Definition at line 706 of file IpoptData.hpp.

3.71.2.5 void Ipopt::IpoptData::set_delta ([SmartPtr](#)< const [IteratesVector](#) > & delta) [inline]

Set the current delta - like the trial point, this method copies the pointer for efficiency (no copy and to keep cache tags the same) so after you call set, you cannot modify the data.

This is the version that is happy with a pointer to const [IteratesVector](#).

Definition at line 780 of file IpoptData.hpp.

3.71.2.6 bool Ipopt::IpoptData::HaveDeltas () const [inline]

Returns true, if the primal-dual step have been already computed for the current iteration.

This flag is reset after every call of [AcceptTrialPoint\(\)](#). If the search direction is computed during the computation of the barrier parameter, the method computing the barrier parameter should call `SetHaveDeltas(true)` to tell the [IpoptAlgorithm](#) object that it doesn't need to recompute the primal-dual step.

Definition at line 227 of file `IpoptData.hpp`.

3.71.2.7 void Ipopt::IpoptData::SetHaveDeltas (bool have_deltas) [inline]

Method for setting the HaveDeltas flag.

This method should be called if some method computes the primal-dual step (and stores it in the `delta_` fields of [IpoptData](#)) at an early part of the iteration. If that flag is set to true, the [IpoptAlgorithm](#) object will not recompute the step.

Definition at line 237 of file `IpoptData.hpp`.

3.71.2.8 bool Ipopt::IpoptData::HaveAffineDeltas () const [inline]

Returns true, if the affine-scaling step have been already computed for the current iteration.

This flag is reset after every call of [AcceptTrialPoint\(\)](#). If the search direction is computed during the computation of the barrier parameter, the method computing the barrier parameter should call `SetHaveDeltas(true)` to tell the line search does not have to recompute them in case it wants to do a corrector step.

Definition at line 257 of file `IpoptData.hpp`.

3.71.2.9 void Ipopt::IpoptData::SetHaveAffineDeltas (bool have_affine_deltas) [inline]

Method for setting the HaveDeltas flag.

This method should be called if some method computes the primal-dual step (and stores it in the `delta_` fields of [IpoptData](#)) at an early part of the iteration. If that flag is set to true, the [IpoptAlgorithm](#) object will not recompute the step.

Definition at line 267 of file `IpoptData.hpp`.

3.71.2.10 void Ipopt::IpoptData::AcceptTrialPoint ()

Set the current iterate values from the trial values.

3.71.2.11 Number Ipopt::IpoptData::tol () const [inline]

Overall convergence tolerance.

It is used in the convergence test, but also in some other parts of the algorithm that depend on the specified tolerance, such as the minimum value for the barrier parameter. Obtain the tolerance.

Definition at line 352 of file `IpoptData.hpp`.

3.71.2.12 void Ipopt::IpoptData::Set_tol (Number tol) [inline]

Set a new value for the tolerance.

One should be very careful when using this, since changing the predefined tolerance might have unexpected consequences. This method is for example used in the restoration convergence checker to tighten the restoration phase convergence tolerance, if the restoration phase converged to a point that has not a large value for the constraint violation.

Definition at line 364 of file `IpoptData.hpp`.

3.71.2.13 Number Ipopt::IpoptData::cpu_time_start () const [inline]

Cpu time counter at the beginning of the optimization.

This is useful to see how much CPU time has been spent in this optimization run.

Definition at line 373 of file IpoptData.hpp.

3.71.2.14 void Ipopt::IpoptData::Set_info_skip_output (bool info_skip_output) [inline]

Set this to true, if the next time when output is written, the summary line should not be printed.

Definition at line 434 of file IpoptData.hpp.

The documentation for this class was generated from the following file:

- IpoptData.hpp

3.72 Ipopt::IpoptException Class Reference

This is the base class for all exceptions.

```
#include <IpException.hpp>
```

Public Member Functions

- void [ReportException](#) (const [Journalist](#) &jnlst, EJournalLevel level=J_ERROR) const
Method to report the exception to a journalist.

Constructors/Destructors

- [IpoptException](#) (std::string msg, std::string file_name, Index line_number, std::string type="IpoptException")
Constructor.
- [IpoptException](#) (const [IpoptException](#) ©)
Copy Constructor.
- virtual [~IpoptException](#) ()
Default destructor.

3.72.1 Detailed Description

This is the base class for all exceptions.

The easiest way to use this class is by means of the following macros:

```
DECLARE_STD_EXCEPTION (ExceptionType);
```

This macro defines a new class with the name ExceptionType, inherited from the base class [IpoptException](#). After this, exceptions of this type can be thrown using

```
THROW_EXCEPTION (ExceptionType, Message);
```

where Message is a std::string with a message that gives an indication of what caused the exception. Exceptions can also be thrown using the macro

```
ASSERT_EXCEPTION(Condition, ExceptionType, Message);
```

where Conditions is an expression. If Condition evaluates to false, then the exception of the type ExceptionType is thrown with Message.

When an exception is caught, the method ReportException can be used to write the information about the exception to the [Journalist](#), using the level J_ERROR and the category J_MAIN.

Definition at line 57 of file IpException.hpp.

The documentation for this class was generated from the following file:


- IpException.hpp

3.73 Ipopt::IpoptNLP Class Reference

This is the abstract base class for classes that map the traditional [NLP](#) into something that is more useful by Ipopt.

```
#include <IpIpoptNLP.hpp>
```

Inheritance diagram for Ipopt::IpoptNLP:

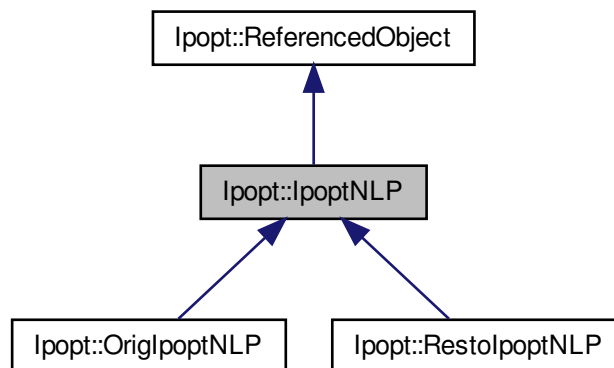

Public Member Functions

- virtual bool [Initialize](#) (const [Journalist](#) &jnlst, const [OptionsList](#) &options, const std::string &prefix)
Initialization method.
- virtual bool [InitializeStructures](#) ([SmartPtr](#)< [Vector](#) > &x, bool init_x, [SmartPtr](#)< [Vector](#) > &y_c, bool init_y_c, [SmartPtr](#)< [Vector](#) > &y_d, bool init_y_d, [SmartPtr](#)< [Vector](#) > &z_L, bool init_z_L, [SmartPtr](#)< [Vector](#) > &z_U, bool init_z_U, [SmartPtr](#)< [Vector](#) > &v_L, [SmartPtr](#)< [Vector](#) > &v_U)=0
Initialize (create) structures for the iteration data.
- virtual bool [GetWarmStartIterate](#) ([IteratesVector](#) &warm_start_iterate)=0
Method accessing the GetWarmStartIterate of the [NLP](#).

- virtual void **GetSpaces** (SmartPtr< const VectorSpace > &x_space, SmartPtr< const VectorSpace > &c_space, SmartPtr< const VectorSpace > &d_space, SmartPtr< const VectorSpace > &x_l_space, SmartPtr< const MatrixSpace > &px_l_space, SmartPtr< const VectorSpace > &x_u_space, SmartPtr< const MatrixSpace > &px_u_space, SmartPtr< const VectorSpace > &d_l_space, SmartPtr< const MatrixSpace > &pd_l_space, SmartPtr< const VectorSpace > &d_u_space, SmartPtr< const MatrixSpace > &pd_u_space, SmartPtr< const MatrixSpace > &Jac_c_space, SmartPtr< const MatrixSpace > &Jac_d_space, SmartPtr< const SymMatrixSpace > &Hess_lagrangian_space)=0

Accessor method for vector/matrix spaces pointers.

- virtual void **AdjustVariableBounds** (const Vector &new_x_L, const Vector &new_x_U, const Vector &new_d_L, const Vector &new_d_U)=0

Method for adapting the variable bounds.

- SmartPtr< NLPScalingObject > **NLP_scaling** () const

Returns the scaling strategy object.

Constructors/Destructors

- **IpoptNLP** (const SmartPtr< NLPScalingObject > nlp_scaling)
- virtual **~IpoptNLP** ()

Default destructor.

Possible Exceptions

- **DECLARE_STD_EXCEPTION** (Eval_Error)

thrown if there is any error evaluating values from the nlp

- virtual Number **f** (const Vector &x)=0

Accessor methods for model data.

- virtual SmartPtr< const Vector > **grad_f** (const Vector &x)=0

Gradient of the objective.

- virtual SmartPtr< const Vector > **c** (const Vector &x)=0

Equality constraint residual.

- virtual SmartPtr< const Matrix > **jac_c** (const Vector &x)=0

Jacobian Matrix for equality constraints.

- virtual SmartPtr< const Vector > **d** (const Vector &x)=0

Inequality constraint residual (reformulated as equalities with slacks).

- virtual SmartPtr< const Matrix > **jac_d** (const Vector &x)=0

Jacobian Matrix for inequality constraints.

- virtual SmartPtr< const SymMatrix > **h** (const Vector &x, Number obj_factor, const Vector &yc, const Vector &yd)=0

Hessian of the Lagrangian.

- virtual SmartPtr< const Vector > **x_L** () const =0

Lower bounds on x.

- virtual SmartPtr< const Matrix > **Px_L** () const =0

Permutation matrix (x_L -> x)

- virtual SmartPtr< const Vector > **x_U** () const =0

Upper bounds on x.

- virtual SmartPtr< const Matrix > **Px_U** () const =0

Permutation matrix (x_U -> x).

- virtual SmartPtr< const Vector > **d_L** () const =0

Lower bounds on d.

- virtual [SmartPtr](#)< const [Matrix](#) > [Pd_L](#) () const =0

Permutation matrix (d_L -> d)

- virtual [SmartPtr](#)< const [Vector](#) > [d_U](#) () const =0

Upper bounds on d.

- virtual [SmartPtr](#)< const [Matrix](#) > [Pd_U](#) () const =0

Permutation matrix (d_U -> d).

- virtual [SmartPtr](#)< const [SymMatrixSpace](#) > [HessianMatrixSpace](#) () const =0

Accessor method to obtain the [MatrixSpace](#) for the Hessian matrix (or it's approximation)

Counters for the number of function evaluations.

- virtual Index [f_evals](#) () const =0
- virtual Index [grad_f_evals](#) () const =0
- virtual Index [c_evals](#) () const =0
- virtual Index [jac_c_evals](#) () const =0
- virtual Index [d_evals](#) () const =0
- virtual Index [jac_d_evals](#) () const =0
- virtual Index [h_evals](#) () const =0

Special method for dealing with the fact that the

restoration phase objective function depends on the barrier parameter

- virtual bool [objective_depends_on_mu](#) () const
Method for telling the [IpoptCalculatedQuantities](#) class whether the objective function depends on the barrier function.
- virtual Number [f](#) (const [Vector](#) &x, Number mu)=0
Replacement for the default objective function method which knows about the barrier parameter.
- virtual [SmartPtr](#)< const [Vector](#) > [grad_f](#) (const [Vector](#) &x, Number mu)=0
Replacement for the default objective gradient method which knows about the barrier parameter.
- virtual [SmartPtr](#)< const [SymMatrix](#) > [h](#) (const [Vector](#) &x, Number obj_factor, const [Vector](#) &yc, const [Vector](#) &yd, Number mu)=0
Replacement for the default Lagrangian Hessian method which knows about the barrier parameter.
- virtual [SmartPtr](#)< const [SymMatrix](#) > [uninitialized_h](#) ()=0
Provides a Hessian matrix from the correct matrix space with uninitialized values.

solution routines

- virtual void [FinalizeSolution](#) (SolverReturn status, const [Vector](#) &x, const [Vector](#) &z_L, const [Vector](#) &z_U, const [Vector](#) &c, const [Vector](#) &d, const [Vector](#) &y_c, const [Vector](#) &y_d, Number obj_value, const [IpoptData](#) *ip_data, [IpoptCalculatedQuantities](#) *ip_cq)=0
- virtual bool [IntermediateCallBack](#) (AlgorithmMode mode, Index iter, Number obj_value, Number inf_pr, Number inf_du, Number mu, Number d_norm, Number regularization_size, Number alpha_du, Number alpha_pr, Index ls_trials, [SmartPtr](#)< const [IpoptData](#) > ip_data, [SmartPtr](#)< [IpoptCalculatedQuantities](#) > ip_cq)=0

3.73.1 Detailed Description

This is the abstract base class for classes that map the traditional [NLP](#) into something that is more useful by Ipopt.

This class takes care of storing the calculated model results, handles cacheing, and (some day) takes care of addition of slacks.

Definition at line 28 of file [IpIpoptNLP.hpp](#).

3.73.2 Member Function Documentation

3.73.2.1 `virtual bool Ipopt::IpoptNLP::Initialize ( const Journalist & jnlst, const OptionsList & options, const std::string & prefix ) [inline], [virtual]`

Initialization method.

Set the internal options and initialize internal data structures.

Reimplemented in [Ipopt::OrigIpoptNLP](#), and [Ipopt::RestIpoptNLP](#).

Definition at line 45 of file `IpoptNLP.hpp`.

3.73.2.2 `virtual Number Ipopt::IpoptNLP::f ( const Vector & x ) [pure virtual]`

Accessor methods for model data.

Objective value

Implemented in [Ipopt::RestIpoptNLP](#), and [Ipopt::OrigIpoptNLP](#).

3.73.2.3 `virtual void Ipopt::IpoptNLP::GetSpaces (SmartPtr< const VectorSpace > & x_space, SmartPtr< const VectorSpace > & c_space, SmartPtr< const VectorSpace > & d_space, SmartPtr< const VectorSpace > & x_l_space, SmartPtr< const MatrixSpace > & px_l_space, SmartPtr< const VectorSpace > & x_u_space, SmartPtr< const MatrixSpace > & px_u_space, SmartPtr< const VectorSpace > & d_l_space, SmartPtr< const MatrixSpace > & pd_l_space, SmartPtr< const VectorSpace > & d_u_space, SmartPtr< const MatrixSpace > & pd_u_space, SmartPtr< const MatrixSpace > & Jac_c_space, SmartPtr< const MatrixSpace > & Jac_d_space, SmartPtr< const SymMatrixSpace > & Hess_lagrangian_space) [pure virtual]`

Accessor method for vector/matrix spaces pointers.

Implemented in [Ipopt::RestIpoptNLP](#), and [Ipopt::OrigIpoptNLP](#).

3.73.2.4 `virtual void Ipopt::IpoptNLP::AdjustVariableBounds ( const Vector & new_x_L, const Vector & new_x_U, const Vector & new_d_L, const Vector & new_d_U ) [pure virtual]`

Method for adapting the variable bounds.

This is called if slacks are becoming too small

Implemented in [Ipopt::RestIpoptNLP](#), and [Ipopt::OrigIpoptNLP](#).

3.73.2.5 `virtual bool Ipopt::IpoptNLP::objective_depends_on_mu ( ) const [inline], [virtual]`

Method for telling the [IpoptCalculatedQuantities](#) class whether the objective function depends on the barrier function.

This is only used for the restoration phase [NLP](#) formulation. Probably only [RestIpoptNLP](#) should overwrite this.

Reimplemented in [Ipopt::RestIpoptNLP](#).

Definition at line 180 of file `IpoptNLP.hpp`.

3.73.2.6 `virtual SmartPtr<const SymMatrix> Ipopt::IpoptNLP::uninitialized_h ( ) [pure virtual]`

Provides a Hessian matrix from the correct matrix space with uninitialized values.

This can be used in `LeastSquareMults` to obtain a "zero Hessian".

Implemented in [Ipopt::RestIpoptNLP](#), and [Ipopt::OrigIpoptNLP](#).

The documentation for this class was generated from the following file:


- `IpoptNLP.hpp`

3.74 Ipopt::IterateInitializer Class Reference

Base class for all methods for initializing the iterates.

```
#include <IpIterateInitializer.hpp>
```

Inheritance diagram for Ipopt::IterateInitializer:



Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [SetInitialIterates](#) ()=0
Compute the initial iterates and set the into the curr field of the ip_data object.

Constructors/Destructors

- [IterateInitializer](#) ()
Default Constructor.
- virtual [~IterateInitializer](#) ()
Default destructor.

Additional Inherited Members

3.74.1 Detailed Description

Base class for all methods for initializing the iterates.

Definition at line 22 of file `IpIterateInitializer.hpp`.

3.74.2 Member Function Documentation

3.74.2.1 virtual bool Ipopt::IterateInitializer::SetInitialIterates () [pure virtual]

Compute the initial iterates and set the into the curr field of the ip_data object.

Implemented in [Ipopt::DefaultIterateInitializer](#), [Ipopt::RestolterateInitializer](#), and [Ipopt::WarmStartIterateInitializer](#).

The documentation for this class was generated from the following file:


- `IpIterateInitializer.hpp`

3.75 Ipopt::IteratesVector Class Reference

Specialized [CompoundVector](#) class specifically for the algorithm iterates.

```
#include <IpIteratesVector.hpp>
```

Inheritance diagram for Ipopt::IteratesVector:

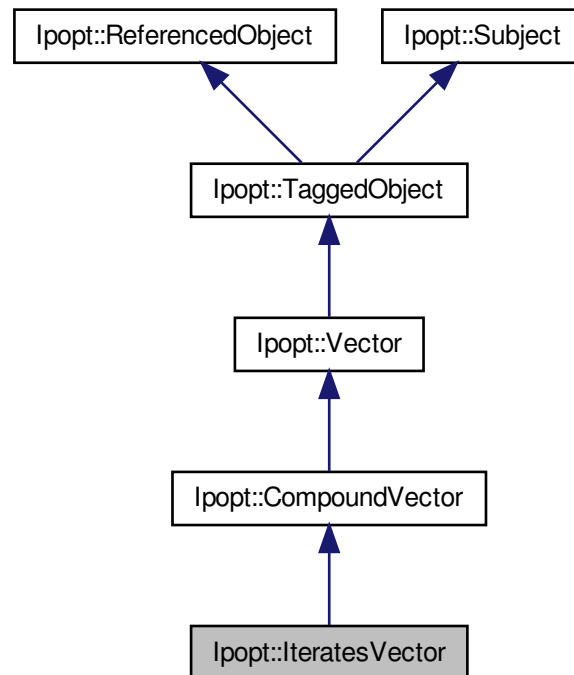

Public Member Functions

- [IteratesVector](#) (const [IteratesVectorSpace](#) *owner_space, bool create_new)
Constructors / Destructors.
- [SmartPointer< IteratesVector > MakeNewIteratesVector](#) (bool create_new=true) const
Make New methods.
- [SmartPointer< IteratesVector > MakeNewIteratesVectorCopy](#) () const
Use this method to create a new iterates vector with a copy of all the data.
- [SmartPointer< IteratesVector > MakeNewContainer](#) () const
Use this method to create a new iterates vector container.
- [SmartPointer< const Vector > x](#) () const
Iterates Set/Get Methods.
- [SmartPointer< Vector > x_NonConst](#) ()

Get the *x* iterate (non-const) - this can only be called if the vector was created internally, or the `Set_x_NonConst` method was used.

- `SmartPtr< Vector > create_new_x ()`
Create a new vector in the *x* entry.
- `SmartPtr< Vector > create_new_x_copy ()`
Create a new vector in the *x* entry and copy the current values into it.
- `void Set_x (const Vector &vec)`
Set the *x* iterate (const).
- `void Set_x_NonConst (Vector &vec)`
Set the *x* iterate (non-const).
- `SmartPtr< const Vector > s () const`
Get the *s* iterate (const)
- `SmartPtr< Vector > s_NonConst ()`
Get the *s* iterate (non-const) - this can only be called if the vector was created internally, or the `Set_s_NonConst` method was used.
- `SmartPtr< Vector > create_new_s ()`
Create a new vector in the *s* entry.
- `SmartPtr< Vector > create_new_s_copy ()`
Create a new vector in the *s* entry and copy the current values into it.
- `void Set_s (const Vector &vec)`
Set the *s* iterate (const).
- `void Set_s_NonConst (Vector &vec)`
Set the *s* iterate (non-const).
- `SmartPtr< const Vector > y_c () const`
Get the *y_c* iterate (const)
- `SmartPtr< Vector > y_c_NonConst ()`
Get the *y_c* iterate (non-const) - this can only be called if the vector was created internally, or the `Set_y_c_NonConst` method was used.
- `SmartPtr< Vector > create_new_y_c ()`
Create a new vector in the *y_c* entry.
- `SmartPtr< Vector > create_new_y_c_copy ()`
Create a new vector in the *y_c* entry and copy the current values into it.
- `void Set_y_c (const Vector &vec)`
Set the *y_c* iterate (const).
- `void Set_y_c_NonConst (Vector &vec)`
Set the *y_c* iterate (non-const).
- `SmartPtr< const Vector > y_d () const`
Get the *y_d* iterate (const)
- `SmartPtr< Vector > y_d_NonConst ()`
Get the *y_d* iterate (non-const) - this can only be called if the vector was created internally, or the `Set_y_d_NonConst` method was used.
- `SmartPtr< Vector > create_new_y_d ()`
Create a new vector in the *y_d* entry.
- `SmartPtr< Vector > create_new_y_d_copy ()`
Create a new vector in the *y_d* entry and copy the current values into it.
- `void Set_y_d (const Vector &vec)`
Set the *y_d* iterate (const).
- `void Set_y_d_NonConst (Vector &vec)`

- Set the *y_d* iterate (non-const).
- `SmartPtr< const Vector > z_L () const`
 - Get the *z_L* iterate (const)
- `SmartPtr< Vector > z_L_NonConst ()`
 - Get the *z_L* iterate (non-const) - this can only be called if the vector was created internally, or the `Set_z_L_NonConst` method was used.
- `SmartPtr< Vector > create_new_z_L ()`
 - Create a new vector in the *z_L* entry.
- `SmartPtr< Vector > create_new_z_L_copy ()`
 - Create a new vector in the *z_L* entry and copy the current values into it.
- `void Set_z_L (const Vector &vec)`
 - Set the *z_L* iterate (const).
- `void Set_z_L_NonConst (Vector &vec)`
 - Set the *z_L* iterate (non-const).
- `SmartPtr< const Vector > z_U () const`
 - Get the *z_U* iterate (const)
- `SmartPtr< Vector > z_U_NonConst ()`
 - Get the *z_U* iterate (non-const) - this can only be called if the vector was created internally, or the `Set_z_U_NonConst` method was used.
- `SmartPtr< Vector > create_new_z_U ()`
 - Create a new vector in the *z_U* entry.
- `SmartPtr< Vector > create_new_z_U_copy ()`
 - Create a new vector in the *z_U* entry and copy the current values into it.
- `void Set_z_U (const Vector &vec)`
 - Set the *z_U* iterate (const).
- `void Set_z_U_NonConst (Vector &vec)`
 - Set the *z_U* iterate (non-const).
- `SmartPtr< const Vector > v_L () const`
 - Get the *v_L* iterate (const)
- `SmartPtr< Vector > v_L_NonConst ()`
 - Get the *v_L* iterate (non-const) - this can only be called if the vector was created internally, or the `Set_v_L_NonConst` method was used.
- `SmartPtr< Vector > create_new_v_L ()`
 - Create a new vector in the *v_L* entry.
- `SmartPtr< Vector > create_new_v_L_copy ()`
 - Create a new vector in the *v_L* entry and copy the current values into it.
- `void Set_v_L (const Vector &vec)`
 - Set the *v_L* iterate (const).
- `void Set_v_L_NonConst (Vector &vec)`
 - Set the *v_L* iterate (non-const).
- `SmartPtr< const Vector > v_U () const`
 - Get the *v_U* iterate (const)
- `SmartPtr< Vector > v_U_NonConst ()`
 - Get the *v_U* iterate (non-const) - this can only be called if the vector was created internally, or the `Set_v_U_NonConst` method was used.
- `SmartPtr< Vector > create_new_v_U ()`
 - Create a new vector in the *v_U* entry.
- `SmartPtr< Vector > create_new_v_U_copy ()`

- *Create a new vector in the v_U entry and copy the current values into it.*
- void [Set_v_U](#) (const [Vector](#) &vec)
- *Set the v_U iterate (const).*
- void [Set_v_U_NonConst](#) ([Vector](#) &vec)
- *Set the v_U iterate (non-const).*
- void [Set_primal](#) (const [Vector](#) &x, const [Vector](#) &s)
- *Set the primal variables all in one shot.*
- void [Set_eq_mult](#) (const [Vector](#) &y_c, const [Vector](#) &y_d)
- *Set the eq multipliers all in one shot.*
- void [Set_bound_mult](#) (const [Vector](#) &z_L, const [Vector](#) &z_U, const [Vector](#) &v_L, const [Vector](#) &v_U)
- *Set the bound multipliers all in one shot.*
- [TaggedObject::Tag](#) [GetTagSum](#) () const
- *Get a sum of the tags of the contained items.*

Additional Inherited Members

3.75.1 Detailed Description

Specialized [CompoundVector](#) class specifically for the algorithm iterates.

This class inherits from [CompoundVector](#) and is a specialized class for handling the iterates of the Ipopt Algorithm, that is, x, s, y_c, y_d, z_L, z_U, v_L, and v_U. It inherits from [CompoundVector](#) so it can behave like a CV in most calculations, but it has fixed dimensions and cannot be customized

Definition at line 27 of file `IpIteratesVector.hpp`.

3.75.2 Member Function Documentation

3.75.2.1 [SmartPointer<IteratesVector>](#) Ipopt::IteratesVector::MakeNewIteratesVector (bool create_new = true) const

Make New methods.

Use this method to create a new iterates vector. The MakeNew method on the [Vector](#) class also works, but it does not give the create_new option.

3.75.2.2 [SmartPointer<IteratesVector>](#) Ipopt::IteratesVector::MakeNewContainer () const

Use this method to create a new iterates vector container.

This creates a new NonConst container, but the elements inside the iterates vector may be const. Therefore, the container can be modified to point to new entries, but the existing entries may or may not be modifiable.

3.75.2.3 [SmartPointer<const Vector>](#) Ipopt::IteratesVector::x () const [inline]

Iterates Set/Get Methods.

Get the x iterate (const)

Definition at line 67 of file `IpIteratesVector.hpp`.

3.75.2.4 [SmartPointer<Vector>](#) Ipopt::IteratesVector::x_NonConst () [inline]

Get the x iterate (non-const) - this can only be called if the vector was created internally, or the Set_x_NonConst method was used.

Definition at line 75 of file `IpIteratesVector.hpp`.

3.75.2.5 SmartPtr<Vector> Ipopt::IteratesVector::create_new_x_copy () [inline]

Create a new vector in the x entry and copy the current values into it.

Definition at line 86 of file IpIteratesVector.hpp.

3.75.2.6 void Ipopt::IteratesVector::Set_x (const Vector & vec) [inline]

Set the x iterate (const).

Sets the pointer, does NOT copy data.

Definition at line 96 of file IpIteratesVector.hpp.

3.75.2.7 void Ipopt::IteratesVector::Set_x_NonConst (Vector & vec) [inline]

Set the x iterate (non-const).

Sets the pointer, does NOT copy data.

Definition at line 103 of file IpIteratesVector.hpp.

3.75.2.8 SmartPtr<Vector> Ipopt::IteratesVector::s_NonConst () [inline]

Get the s iterate (non-const) - this can only be called if the vector was created internally, or the Set_s_NonConst method was used.

Definition at line 117 of file IpIteratesVector.hpp.

3.75.2.9 SmartPtr<Vector> Ipopt::IteratesVector::create_new_s_copy () [inline]

Create a new vector in the s entry and copy the current values into it.

Definition at line 128 of file IpIteratesVector.hpp.

3.75.2.10 void Ipopt::IteratesVector::Set_s (const Vector & vec) [inline]

Set the s iterate (const).

Sets the pointer, does NOT copy data.

Definition at line 138 of file IpIteratesVector.hpp.

3.75.2.11 void Ipopt::IteratesVector::Set_s_NonConst (Vector & vec) [inline]

Set the s iterate (non-const).

Sets the pointer, does NOT copy data.

Definition at line 145 of file IpIteratesVector.hpp.

3.75.2.12 SmartPtr<Vector> Ipopt::IteratesVector::y_c_NonConst () [inline]

Get the y_c iterate (non-const) - this can only be called if the vector was created internally, or the Set_y_c_NonConst method was used.

Definition at line 159 of file IpIteratesVector.hpp.

3.75.2.13 SmartPtr<Vector> Ipopt::IteratesVector::create_new_y_c_copy () [inline]

Create a new vector in the y_c entry and copy the current values into it.

Definition at line 170 of file IpIteratesVector.hpp.

3.75.2.14 `void Ipopt::IteratesVector::Set_y_c( const Vector & vec ) [inline]`

Set the y_c iterate (const).

Sets the pointer, does NOT copy data.

Definition at line 180 of file IpIteratesVector.hpp.

3.75.2.15 `void Ipopt::IteratesVector::Set_y_c_NonConst( Vector & vec ) [inline]`

Set the y_c iterate (non-const).

Sets the pointer, does NOT copy data.

Definition at line 187 of file IpIteratesVector.hpp.

3.75.2.16 `SmartPtr<Vector> Ipopt::IteratesVector::y_d_NonConst( ) [inline]`

Get the y_d iterate (non-const) - this can only be called if the vector was created internally, or the Set_y_d_NonConst method was used.

Definition at line 201 of file IpIteratesVector.hpp.

3.75.2.17 `SmartPtr<Vector> Ipopt::IteratesVector::create_new_y_d_copy( ) [inline]`

Create a new vector in the y_d entry and copy the current values into it.

Definition at line 212 of file IpIteratesVector.hpp.

3.75.2.18 `void Ipopt::IteratesVector::Set_y_d( const Vector & vec ) [inline]`

Set the y_d iterate (const).

Sets the pointer, does NOT copy data.

Definition at line 222 of file IpIteratesVector.hpp.

3.75.2.19 `void Ipopt::IteratesVector::Set_y_d_NonConst( Vector & vec ) [inline]`

Set the y_d iterate (non-const).

Sets the pointer, does NOT copy data.

Definition at line 229 of file IpIteratesVector.hpp.

3.75.2.20 `SmartPtr<Vector> Ipopt::IteratesVector::z_L_NonConst( ) [inline]`

Get the z_L iterate (non-const) - this can only be called if the vector was created internally, or the Set_z_L_NonConst method was used.

Definition at line 243 of file IpIteratesVector.hpp.

3.75.2.21 `SmartPtr<Vector> Ipopt::IteratesVector::create_new_z_L_copy( ) [inline]`

Create a new vector in the z_L entry and copy the current values into it.

Definition at line 254 of file IpIteratesVector.hpp.

3.75.2.22 `void Ipopt::IteratesVector::Set_z_L( const Vector & vec ) [inline]`

Set the z_L iterate (const).

Sets the pointer, does NOT copy data.

Definition at line 264 of file IpIteratesVector.hpp.

3.75.2.23 `void Ipopt::IteratesVector::Set_z_L_NonConst ( Vector & vec ) [inline]`

Set the z_L iterate (non-const).

Sets the pointer, does NOT copy data.

Definition at line 271 of file IpIteratesVector.hpp.

3.75.2.24 `SmartPointer<Vector> Ipopt::IteratesVector::z_U_NonConst ( ) [inline]`

Get the z_U iterate (non-const) - this can only be called if the vector was created internally, or the Set_z_U_NonConst method was used.

Definition at line 285 of file IpIteratesVector.hpp.

3.75.2.25 `SmartPointer<Vector> Ipopt::IteratesVector::create_new_z_U_copy ( ) [inline]`

Create a new vector in the z_U entry and copy the current values into it.

Definition at line 296 of file IpIteratesVector.hpp.

3.75.2.26 `void Ipopt::IteratesVector::Set_z_U ( const Vector & vec ) [inline]`

Set the z_U iterate (const).

Sets the pointer, does NOT copy data.

Definition at line 306 of file IpIteratesVector.hpp.

3.75.2.27 `void Ipopt::IteratesVector::Set_z_U_NonConst ( Vector & vec ) [inline]`

Set the z_U iterate (non-const).

Sets the pointer, does NOT copy data.

Definition at line 313 of file IpIteratesVector.hpp.

3.75.2.28 `SmartPointer<Vector> Ipopt::IteratesVector::v_L_NonConst ( ) [inline]`

Get the v_L iterate (non-const) - this can only be called if the vector was created internally, or the Set_v_L_NonConst method was used.

Definition at line 327 of file IpIteratesVector.hpp.

3.75.2.29 `SmartPointer<Vector> Ipopt::IteratesVector::create_new_v_L_copy ( ) [inline]`

Create a new vector in the v_L entry and copy the current values into it.

Definition at line 338 of file IpIteratesVector.hpp.

3.75.2.30 `void Ipopt::IteratesVector::Set_v_L ( const Vector & vec ) [inline]`

Set the v_L iterate (const).

Sets the pointer, does NOT copy data.

Definition at line 348 of file IpIteratesVector.hpp.

3.75.2.31 `void Ipopt::IteratesVector::Set_v_L_NonConst ( Vector & vec ) [inline]`

Set the v_L iterate (non-const).

Sets the pointer, does NOT copy data.

Definition at line 355 of file IpIteratesVector.hpp.

3.75.2.32 SmartPtr<Vector> Ipopt::IteratesVector::v_U_NonConst () [inline]

Get the v_U iterate (non-const) - this can only be called if the vector was created internally, or the Set_v_U_NonConst method was used.

Definition at line 369 of file IpIteratesVector.hpp.

3.75.2.33 SmartPtr<Vector> Ipopt::IteratesVector::create_new_v_U_copy () [inline]

Create a new vector in the v_U entry and copy the current values into it.

Definition at line 380 of file IpIteratesVector.hpp.

3.75.2.34 void Ipopt::IteratesVector::Set_v_U (const Vector & vec) [inline]

Set the v_U iterate (const).

Sets the pointer, does NOT copy data.

Definition at line 390 of file IpIteratesVector.hpp.

3.75.2.35 void Ipopt::IteratesVector::Set_v_U_NonConst (Vector & vec) [inline]

Set the v_U iterate (non-const).

Sets the pointer, does NOT copy data.

Definition at line 397 of file IpIteratesVector.hpp.

3.75.2.36 void Ipopt::IteratesVector::Set_primal (const Vector & x, const Vector & s) [inline]

Set the primal variables all in one shot.

Sets the pointers, does NOT copy data

Definition at line 404 of file IpIteratesVector.hpp.

3.75.2.37 void Ipopt::IteratesVector::Set_eq_mult (const Vector & y_c, const Vector & y_d) [inline]

Set the eq multipliers all in one shot.

Sets the pointers, does not copy data.

Definition at line 417 of file IpIteratesVector.hpp.

3.75.2.38 void Ipopt::IteratesVector::Set_bound_mult (const Vector & z_L, const Vector & z_U, const Vector & v_L, const Vector & v_U) [inline]

Set the bound multipliers all in one shot.

Sets the pointers, does not copy data.

Definition at line 430 of file IpIteratesVector.hpp.

3.75.2.39 TaggedObject::Tag Ipopt::IteratesVector::GetTagSum () const [inline]

Get a sum of the tags of the contained items.

There is no guarantee that this is unique, but there is a high chance it is unique and it can be used for debug checks relatively reliably.

Definition at line 450 of file IpIteratesVector.hpp.

The documentation for this class was generated from the following file:


- IpIteratesVector.hpp

3.76 Ipopt::IteratesVectorSpace Class Reference

[Vector](#) Space for the [IteratesVector](#) class.

```
#include <IpIteratesVector.hpp>
```

Inheritance diagram for Ipopt::IteratesVectorSpace:

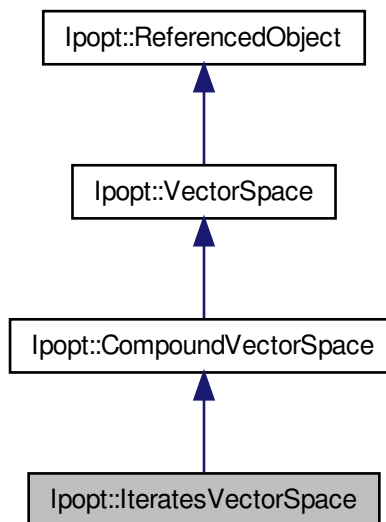

Public Member Functions

- virtual void [SetCompSpace](#) (Index icomp, const [VectorSpace](#) &vec_space)
This method hides the [CompoundVectorSpace::SetCompSpace](#) method since the components of the Iterates are fixed at construction.

Constructors/Destructors.

- [IteratesVectorSpace](#) (const [VectorSpace](#) &x_space, const [VectorSpace](#) &s_space, const [VectorSpace](#) &y_c_space, const [VectorSpace](#) &y_d_space, const [VectorSpace](#) &z_L_space, const [VectorSpace](#) &z_U_space, const [VectorSpace](#) &v_L_space, const [VectorSpace](#) &v_U_space)
Constructor that takes the spaces for each of the iterates.
- virtual [~IteratesVectorSpace](#) ()
- virtual [IteratesVector](#) * [MakeNewIteratesVector](#) (bool create_new=true) const

Method for creating vectors .

- const [SmartPtr](#)< const [IteratesVector](#) > [MakeNewIteratesVector](#) (const [Vector](#) &x, const [Vector](#) &s, const [Vector](#) &y_c, const [Vector](#) &y_d, const [Vector](#) &z_L, const [Vector](#) &z_U, const [Vector](#) &v_L, const [Vector](#) &v_U)

Use this method to create a new const [IteratesVector](#).

- virtual [CompoundVector](#) * [MakeNewCompoundVector](#) (bool create_new=true) const
This method overloads [CompoundVectorSpace::MakeNewCompoundVector](#) to make sure that we get a vector of the correct type.
- virtual [Vector](#) * [MakeNew](#) () const
This method creates a new vector (and allocates space in all the contained vectors).

3.76.1 Detailed Description

[Vector](#) Space for the [IteratesVector](#) class.

This is a specialized vector space for the [IteratesVector](#) class.

Definition at line 532 of file [IpIteratesVector.hpp](#).

3.76.2 Constructor & Destructor Documentation

3.76.2.1 `Ipopt::IteratesVectorSpace::IteratesVectorSpace ( const VectorSpace & x_space, const VectorSpace & s_space, const VectorSpace & y_c_space, const VectorSpace & y_d_space, const VectorSpace & z_L_space, const VectorSpace & z_U_space, const VectorSpace & v_L_space, const VectorSpace & v_U_space )`

Constructor that takes the spaces for each of the iterates.

Warning! None of these can be NULL !

3.76.3 Member Function Documentation

3.76.3.1 `virtual IteratesVector* Ipopt::IteratesVectorSpace::MakeNewIteratesVector ( bool create_new = true ) const`
[inline], [virtual]

Method for creating vectors .

Use this to create a new [IteratesVector](#). You can pass-in create_new = false if you only want a container and do not want vectors allocated.

Definition at line 555 of file [IpIteratesVector.hpp](#).

3.76.3.2 `const SmartPtr<const IteratesVector> Ipopt::IteratesVectorSpace::MakeNewIteratesVector ( const Vector & x, const Vector & s, const Vector & y_c, const Vector & y_d, const Vector & z_L, const Vector & z_U, const Vector & v_L, const Vector & v_U )` [inline]

Use this method to create a new const [IteratesVector](#).

You must pass in valid pointers for all of the entries.

Definition at line 563 of file [IpIteratesVector.hpp](#).

3.76.3.3 `virtual Vector* Ipopt::IteratesVectorSpace::MakeNew ( ) const` [inline], [virtual]

This method creates a new vector (and allocates space in all the contained vectors).

This is really only used for code that does not know what type of vector it is dealing with - for example, this method is called from [Vector::MakeNew\(\)](#)

Reimplemented from [Ipopt::CompoundVectorSpace](#).

Definition at line 595 of file IpIteratesVector.hpp.

The documentation for this class was generated from the following file:


- IpIteratesVector.hpp

3.77 Ipopt::IterationOutput Class Reference

Base class for objects that do the output summary per iteration.

```
#include <IpIterationOutput.hpp>
```

Inheritance diagram for Ipopt::IterationOutput:

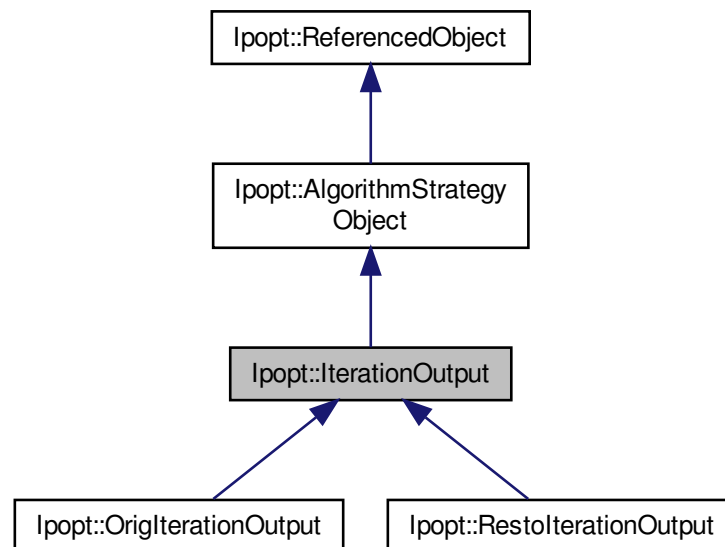

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
overloaded from [AlgorithmStrategyObject](#)
- virtual void [WriteOutput](#) ()=0
Method to do all the summary output per iteration.

Constructors/Destructors

- [IterationOutput](#) ()

Default Constructor.

- virtual [~IterationOutput](#) ()

Default destructor.

Protected Types

- enum [InfPrOutput](#)
enumeration for different inf_pr output options

Additional Inherited Members

3.77.1 Detailed Description

Base class for objects that do the output summary per iteration.

Definition at line 22 of file `IpIterationOutput.hpp`.

3.77.2 Member Function Documentation

3.77.2.1 virtual void Ipopt::IterationOutput::WriteOutput () [pure virtual]

Method to do all the summary output per iteration.

This include the one-line summary output as well as writing the details about the iterates if desired

Implemented in [Ipopt::RestIterationOutput](#), and [Ipopt::OrigIterationOutput](#).

The documentation for this class was generated from the following file:


- `IpIterationOutput.hpp`

3.78 Ipopt::IterativePardisoSolverInterface Class Reference

Interface to the linear solver Pardiso, derived from [SparseSymLinearSolverInterface](#).

```
#include <IpIterativePardisoSolverInterface.hpp>
```

Inheritance diagram for Ipopt::IterativePardisoSolverInterface:

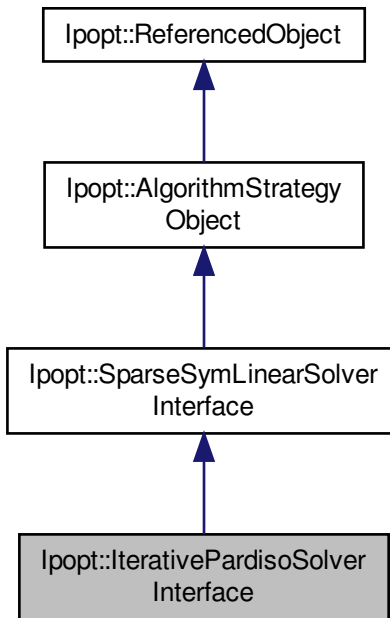

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)

Constructor/Destructor

- [IterativePardisoSolverInterface](#) ([IterativeSolverTerminationTester](#) &normal_tester, [IterativeSolverTerminationTester](#) &pd_tester)
Constructor.
- virtual [~IterativePardisoSolverInterface](#) ()
Destructor.

Methods for requesting solution of the linear system.

- virtual ESymSolverStatus [InitializeStructure](#) (Index dim, Index nonzeros, const Index *ia, const Index *ja)
Method for initializing internal structures.
- virtual double * [GetValuesArrayPtr](#) ()
Method returning an internal array into which the nonzero elements are to be stored.
- virtual ESymSolverStatus [MultiSolve](#) (bool new_matrix, const Index *ia, const Index *ja, Index nrhs, double *rhs_vals, bool check_NegEVals, Index numberOfNegEVals)
Solve operation for multiple right hand sides.
- virtual Index [NumberOfNegEVals](#) () const

Number of negative eigenvalues detected during last factorization.

- virtual bool [IncreaseQuality](#) ()
Request to increase quality of solution for next solve.
- virtual bool [ProvidesInertia](#) () const
Query whether inertia is computed by linear solver.
- [EMatrixFormat](#) [MatrixFormat](#) () const
Query of requested matrix type that the linear solver understands.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members

3.78.1 Detailed Description

Interface to the linear solver Pardiso, derived from [SparseSymLinearSolverInterface](#).

For details, see description of [SparseSymLinearSolverInterface](#) base class.

Definition at line 25 of file `IpIterativePardisoSolverInterface.hpp`.

3.78.2 Member Function Documentation

3.78.2.1 virtual ESymSolverStatus Ipopt::IterativePardisoSolverInterface::InitializeStructure (Index *dim*, Index *nonzeros*, const Index * *ia*, const Index * *ja*) [virtual]

Method for initializing internal structures.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.78.2.2 virtual double* Ipopt::IterativePardisoSolverInterface::GetValuesArrayPtr () [virtual]

Method returning an internal array into which the nonzero elements are to be stored.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.78.2.3 virtual ESymSolverStatus Ipopt::IterativePardisoSolverInterface::MultiSolve (bool *new_matrix*, const Index * *ia*, const Index * *ja*, Index *nrhs*, double * *rhs_vals*, bool *check_NegEVals*, Index *numberOfNegEVals*) [virtual]

Solve operation for multiple right hand sides.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.78.2.4 virtual bool Ipopt::IterativePardisoSolverInterface::ProvidesInertia () const [inline],[virtual]

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 78 of file `IpIterativePardisoSolverInterface.hpp`.

The documentation for this class was generated from the following file:


- IpIterativePardisoSolverInterface.hpp

3.79 Ipopt::IterativeSolverTerminationTester Class Reference

This base class is for the termination tests for the iterative linear solver in the inexact version of Ipopt.

```
#include <IpIterativeSolverTerminationTester.hpp>
```

Inheritance diagram for Ipopt::IterativeSolverTerminationTester:

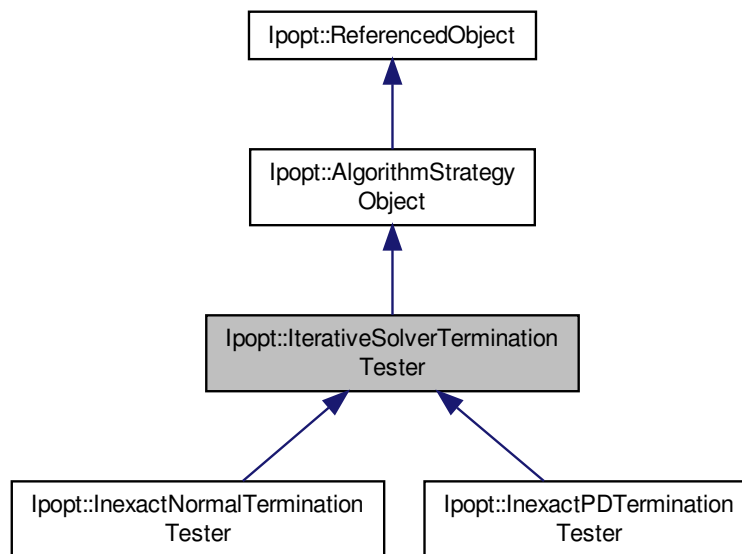

Public Types

- enum [ETerminationTest](#) {
[CONTINUE](#), [TEST_1_SATISFIED](#), [TEST_2_SATISFIED](#), [TEST_3_SATISFIED](#),
[MODIFY_HESSIAN](#), [OTHER_SATISFIED](#) }

Enum to report result of termination test.

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
Implementation of the initialization method that has to be overloaded by for each derived class.
- virtual bool [InitializeSolve](#) ()=0
Method for initializing for the next iterative solve.
- virtual [ETerminationTest](#) [TestTermination](#) (Index ndim, const Number *sol, const Number *resid, Index iter, Number norm2_rhs)=0
This method checks if the current solution of the iterative linear solver is good enough (by returning the corresponding satisfied termination test), or if the Hessian should be modified.

- virtual void [Clear](#) ()=0
This method can be called after the Solve is over and we can delete anything that has been allocated to free memory.
- const [Journalist](#) & [GetJnlst](#) () const
An easy way to get the journalist if accessed from the outside.
- virtual Index [GetSolverIterations](#) () const =0
Return the number of iterative solver iteration from the most recent solve.

/Destructor

- [IterativeSolverTerminationTester](#) ()
Default constructor.
- virtual [~IterativeSolverTerminationTester](#) ()
Default destructor.

Protected Member Functions

- void [GetVectors](#) (Index ndim, const Number *array, [SmartPtr](#)< const [Vector](#) > &comp_x, [SmartPtr](#)< const [Vector](#) > &comp_s, [SmartPtr](#)< const [Vector](#) > &comp_c, [SmartPtr](#)< const [Vector](#) > &comp_d)
Method for copying a long augmented system array into Vectors in Ipopt notation.
- [InexactData](#) & [InexData](#) ()
Method to easily access Inexact data.
- [InexactCq](#) & [InexCq](#) ()
Method to easily access Inexact calculated quantities.

3.79.1 Detailed Description

This base class is for the termination tests for the iterative linear solver in the inexact version of Ipopt.

Definition at line 21 of file `IpIterativeSolverTerminationTester.hpp`.

3.79.2 Member Enumeration Documentation**3.79.2.1 enum Ipopt::IterativeSolverTerminationTester::ETerminationTest**

Enum to report result of termination test.

Enumerator:

- CONTINUE** The current solution is not yet good enough.
- TEST_1_SATISFIED** Termination Test 1 is satisfied.
- TEST_2_SATISFIED** Termination Test 2 is satisfied.
- TEST_3_SATISFIED** Termination Test 3 is satisfied.
- MODIFY_HESSIAN** Hessian matrix should be modified.
- OTHER_SATISFIED** Some other termination criterion satisfied.

Definition at line 25 of file `IpIterativeSolverTerminationTester.hpp`.

3.79.3 Member Function Documentation

3.79.3.1 `virtual bool Ipopt::IterativeSolverTerminationTester::InitializeImpl ( const OptionsList & options, const std::string & prefix ) [pure virtual]`

Implementation of the initialization method that has to be overloaded by for each derived class.

Implements [Ipopt::AlgorithmStrategyObject](#).

Implemented in [Ipopt::InexactNormalTerminationTester](#), and [Ipopt::InexactPDTerminationTester](#).

3.79.3.2 `virtual bool Ipopt::IterativeSolverTerminationTester::InitializeSolve ( ) [pure virtual]`

Method for initializing for the next iterative solve.

This must be call before the test methods are called.

Implemented in [Ipopt::InexactNormalTerminationTester](#), and [Ipopt::InexactPDTerminationTester](#).

3.79.3.3 `virtual ETerminationTest Ipopt::IterativeSolverTerminationTester::TestTermination ( Index ndim, const Number * sol, const Number * resid, Index iter, Number norm2_rhs ) [pure virtual]`

This method checks if the current soltion of the iterative linear solver is good enough (by returning the corresponding satisfied termination test), or if the Hessian should be modified.

The input is the dimension of the augmented system, the current solution vector of the augmented system, the current residual vector.

Implemented in [Ipopt::InexactNormalTerminationTester](#), and [Ipopt::InexactPDTerminationTester](#).

3.79.3.4 `virtual void Ipopt::IterativeSolverTerminationTester::Clear ( ) [pure virtual]`

This method can be called after the Solve is over and we can delete anything that has been allocated to free memory.

Implemented in [Ipopt::InexactNormalTerminationTester](#), and [Ipopt::InexactPDTerminationTester](#).

The documentation for this class was generated from the following file:


- `IpIterativeSolverTerminationTester.hpp`

3.80 Ipopt::IterativeWsmpSolverInterface Class Reference

Interface to the linear solver WISMP, derived from [SparseSymLinearSolverInterface](#).

```
#include <IpIterativeWsmpSolverInterface.hpp>
```

Inheritance diagram for Ipopt::IterativeWsmvSolverInterface:

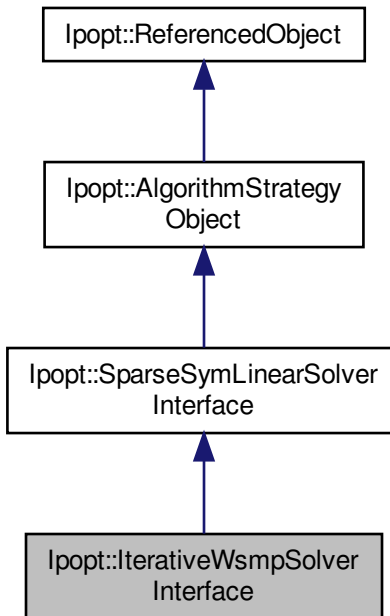

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)

Constructor/Destructor

- [IterativeWsmvSolverInterface](#) ()
Constructor.
- virtual [~IterativeWsmvSolverInterface](#) ()
Destructor.

Methods for requesting solution of the linear system.

- virtual ESymSolverStatus [InitializeStructure](#) (Index dim, Index nonzeros, const Index *ia, const Index *ja)
Method for initializing internal structures.
- virtual double * [GetValuesArrayPtr](#) ()
Method returning an internal array into which the nonzero elements are to be stored.
- virtual ESymSolverStatus [MultiSolve](#) (bool new_matrix, const Index *ia, const Index *ja, Index nrhs, double *rhs_vals, bool check_NegEVals, Index numberOfNegEVals)
Solve operation for multiple right hand sides.
- virtual Index [NumberOfNegEVals](#) () const
Number of negative eigenvalues detected during last factorization.

- virtual bool [IncreaseQuality](#) ()
Request to increase quality of solution for next solve.
- virtual bool [ProvidesInertia](#) () const
Query whether inertia is computed by linear solver.
- [EMatrixFormat](#) [MatrixFormat](#) () const
Query of requested matrix type that the linear solver understands.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members

3.80.1 Detailed Description

Interface to the linear solver WISMP, derived from [SparseSymLinearSolverInterface](#).

For details, see description of [SparseSymLinearSolverInterface](#) base class.

Definition at line 23 of file `IpIterativeWsmSolverInterface.hpp`.

3.80.2 Member Function Documentation

3.80.2.1 virtual ESymSolverStatus Ipopt::IterativeWsmSolverInterface::InitializeStructure (Index *dim*, Index *nonzeros*, const Index * *ia*, const Index * *ja*) [virtual]

Method for initializing internal structures.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.80.2.2 virtual double* Ipopt::IterativeWsmSolverInterface::GetValuesArrayPtr () [virtual]

Method returning an internal array into which the nonzero elements are to be stored.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.80.2.3 virtual ESymSolverStatus Ipopt::IterativeWsmSolverInterface::MultiSolve (bool *new_matrix*, const Index * *ia*, const Index * *ja*, Index *nrhs*, double * *rhs_vals*, bool *check_NegEvals*, Index *numberOfNegEvals*) [virtual]

Solve operation for multiple right hand sides.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.80.2.4 virtual bool Ipopt::IterativeWsmSolverInterface::ProvidesInertia () const [inline], [virtual]

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 75 of file `IpIterativeWsmSolverInterface.hpp`.

The documentation for this class was generated from the following file:


- `IpIterativeWsmSolverInterface.hpp`

3.81 Ipopt::Journal Class Reference

[Journal](#) class (part of the [Journalist](#) implementation.).

```
#include <IpJournalist.hpp>
```

Inheritance diagram for Ipopt::Journal:

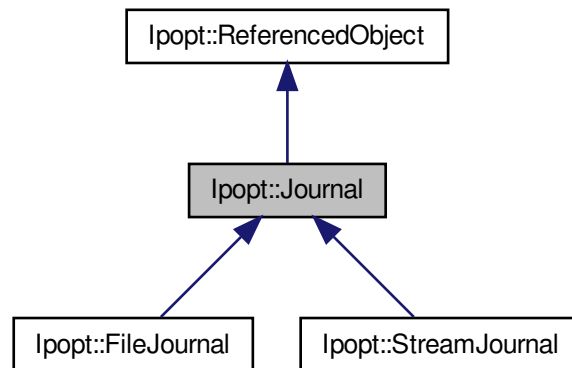

Public Member Functions

- [Journal](#) (const std::string &name, EJournalLevel default_level)
Constructor.
- virtual [~Journal](#) ()
Destructor.
- virtual std::string [Name](#) ()
Get the name of the [Journal](#).
- virtual void [SetPrintLevel](#) (EJournalCategory category, EJournalLevel level)
Set the print level for a particular category.
- virtual void [SetAllPrintLevels](#) (EJournalLevel level)
Set the print level for all category.

Journal Output Methods. These methods are called by the

[Journalist](#) who first checks if the output print level and category are acceptable.

Calling the Print methods explicitly (instead of through the [Journalist](#) will output the message regardless of print level and category. You should use the [Journalist](#) to print & flush instead

- virtual bool [IsAccepted](#) (EJournalCategory category, EJournalLevel level) const
Ask if a particular print level/category is accepted by the journal.
- virtual void [Print](#) (EJournalCategory category, EJournalLevel level, const char *str)
Print to the designated output location.
- virtual void [Printf](#) (EJournalCategory category, EJournalLevel level, const char *pformat, va_list ap)
Printf to the designated output location.
- virtual void [FlushBuffer](#) ()
Flush output buffer.

Protected Member Functions

Implementation version of Print methods. Derived classes

should overload the Impl methods.

- virtual void [PrintImpl](#) (EJournalCategory category, EJournalLevel level, const char *str)=0
Print to the designated output location.
- virtual void [PrintfImpl](#) (EJournalCategory category, EJournalLevel level, const char *pformat, va_list ap)=0
Printf to the designated output location.
- virtual void [FlushBufferImpl](#) ()=0
Flush output buffer.

3.81.1 Detailed Description

[Journal](#) class (part of the [Journalist](#) implementation.).

This class is the base class for all Journals. It controls the acceptance criteria for print statements etc. Derived classes like the [FileJournal](#) - output those messages to specific locations

Definition at line 273 of file IpJournalist.hpp.

3.81.2 Constructor & Destructor Documentation

3.81.2.1 Ipopt::Journal::Journal (const std::string & name, EJournalLevel default_level)

Constructor.

3.81.2.2 virtual Ipopt::Journal::~Journal () [virtual]

Destructor.

3.81.3 Member Function Documentation

3.81.3.1 virtual void Ipopt::Journal::SetPrintLevel (EJournalCategory category, EJournalLevel level) [virtual]

Set the print level for a particular category.

3.81.3.2 virtual void Ipopt::Journal::SetAllPrintLevels (EJournalLevel level) [virtual]

Set the print level for all category.

3.81.3.3 virtual void Ipopt::Journal::FlushBuffer () [inline],[virtual]

Flush output buffer.

Definition at line 325 of file IpJournalist.hpp.

3.81.3.4 virtual void Ipopt::Journal::FlushBufferImpl () [protected],[pure virtual]

Flush output buffer.

Implemented in [Ipopt::StreamJournal](#), and [Ipopt::FileJournal](#).

The documentation for this class was generated from the following file:


- IpJournalist.hpp

3.82 Ipopt::Journalist Class Reference

Class responsible for all message output.

```
#include <IpJournalist.hpp>
```

Inheritance diagram for Ipopt::Journalist:



Public Member Functions

Constructor / Desructor.

- [Journalist](#) ()
Constructor.
- virtual [~Journalist](#) ()
Destructor...

Author Methods.

These methods are used by authoring code, or code that wants to report some information.

- virtual void [Printf](#) (EJournalLevel level, EJournalCategory category, const char *format,...) const
Method to print a formatted string.
- virtual void [PrintStringOverLines](#) (EJournalLevel level, EJournalCategory category, Index indent_spaces, Index max_length, const std::string &line) const
Method to print a long string including indentation.
- virtual void [PrintfIndented](#) (EJournalLevel level, EJournalCategory category, Index indent_level, const char *format,...) const
Method to print a formatted string with indentation.
- virtual void [VPrintf](#) (EJournalLevel level, EJournalCategory category, const char *pformat, va_list ap) const
Method to print a formatted string using the va_list argument.
- virtual void [VPrintfIndented](#) (EJournalLevel level, EJournalCategory category, Index indent_level, const char *pformat, va_list ap) const
Method to print a formatted string with indentation, using the va_list argument.
- virtual bool [ProduceOutput](#) (EJournalLevel level, EJournalCategory category) const
Method that returns true if there is a [Journal](#) that would write output for the given JournalLevel and JournalCategory.
- virtual void [FlushBuffer](#) () const
Method that flushes the current buffer for all Journalists.

Reader Methods.

These methods are used by the reader.

The reader will setup the journalist with each output file and the acceptance criteria for that file.

Use these methods to setup the journals (files or other output). These are the internal objects that keep track of the print levels for each category. Then use the internal [Journal](#) objects to set specific print levels for each category (or keep defaults).

- virtual bool [AddJournal](#) (const [SmartPtr](#)< [Journal](#) > jrnI)
Add a new journal.
- virtual [SmartPtr](#)< [Journal](#) > [AddFileJournal](#) (const std::string &location_name, const std::string &fname, E-JournalLevel default_level=J_WARNING)
Add a new [FileJournal](#).
- virtual [SmartPtr](#)< [Journal](#) > [GetJournal](#) (const std::string &location_name)
Get an existing journal.
- virtual void [DeleteAllJournals](#) ()
Delete all journals curenly known by the journalist.

3.82.1 Detailed Description

Class responsible for all message output.

This class is responsible for all messaging and output. The "printing" code or "author" should send ALL messages to the [Journalist](#), indicating an appropriate category and print level. The journalist then decides, based on reader specified acceptance criteria, which message is actually printed in which journals. This allows the printing code to send everything, while the "reader" can decide what they really want to see.

Authors: Authors use the Journals: You can add as many Journals as you like to the [Journalist](#) with the [AddJournal](#) or the [AddFileJournal](#) methods. Each one represents a different printing location (or file). Then, you can call the "print" methods of the [Journalist](#) to output information to each of the journals.

Acceptance Criteria: Each print message should be flagged appropriately with an [EJournalCategory](#) and [EJournalLevel](#).

The [AddFileJournal](#) method returns a pointer to the newly created [Journal](#) object (if successful) so you can set Acceptance criteria for that particular location.

Definition at line 134 of file [IpJournalist.hpp](#).

3.82.2 Constructor & Destructor Documentation**3.82.2.1 Ipopt::Journalist::Journalist ()**

Constructor.

3.82.2.2 virtual Ipopt::Journalist::~~Journalist () [virtual]

Destructor...

3.82.3 Member Function Documentation**3.82.3.1 virtual void Ipopt::Journalist::PrintStringOverLines ([EJournalLevel](#) level, [EJournalCategory](#) category, Index indent_spaces, Index max_length, const std::string & line) const [virtual]**

Method to print a long string including indentation.

The string is printed starting at the current position. If the position (counting started at the current position) exceeds `max_length`, a new line is inserted, and `indent_spaces` many spaces are printed before the string is continued. This is for example used during the printing of the option documentation.

3.82.3.2 `virtual void Ipopt::Journalist::VPrintf ( EJournalLevel level, EJournalCategory category, const char * pformat, va_list ap ) const` [virtual]

Method to print a formatted string using the `va_list` argument.

3.82.3.3 `virtual void Ipopt::Journalist::VPrintfIndented ( EJournalLevel level, EJournalCategory category, Index indent_level, const char * pformat, va_list ap ) const` [virtual]

Method to print a formatted string with indentation, using the `va_list` argument.

3.82.3.4 `virtual bool Ipopt::Journalist::ProduceOutput ( EJournalLevel level, EJournalCategory category ) const` [virtual]

Method that returns true if there is a [Journal](#) that would write output for the given `JournalLevel` and `JournalCategory`.

This is useful if expensive computation would be required for a particular output. The author code can check with this method if the computations are indeed required.

3.82.3.5 `virtual void Ipopt::Journalist::FlushBuffer ( ) const` [virtual]

Method that flushes the current buffer for all Journalists.

Calling this method after one optimization run helps to avoid cluttering output with that produced by other parts of the program (e.g. written in Fortran)

3.82.3.6 `virtual bool Ipopt::Journalist::AddJournal ( const SmartPtr< Journal > jrn1 )` [virtual]

Add a new journal.

The `location_name` is a string identifier, which can be used to obtain the pointer to the new [Journal](#) at a later point using the `GetJournal` method. The `default_level` is used to initialize the * printing level for all categories.

3.82.3.7 `virtual SmartPtr<Journal> Ipopt::Journalist::AddFileJournal ( const std::string & location_name, const std::string & fname, EJournalLevel default_level = J_WARNING )` [virtual]

Add a new [FileJournal](#).

`fname` is the name of the * file to which this [Journal](#) corresponds. Use `fname="stdout"` * for stdout, and use `fname="stderr"` for stderr. This method * returns the [Journal](#) pointer so you can set specific acceptance criteria. It returns NULL if there was a problem creating a new [Journal](#).

Parameters

<i>location_name</i>	journal identifier
<i>fname</i>	file name
<i>default_level</i>	default journal level

3.82.3.8 `virtual SmartPtr<Journal> Ipopt::Journalist::GetJournal ( const std::string & location_name )` [virtual]

Get an existing journal.

You can use this method to change the acceptance criteria at runtime.

3.82.3.9 `virtual void Ipopt::Journalist::DeleteAllJournals ( )` [virtual]

Delete all journals curently known by the journalist.

The documentation for this class was generated from the following file:


- IpJournalist.hpp

3.83 Ipopt::LeastSquareMultipliers Class Reference

Class for calculator for the least-square equality constraint multipliers.

```
#include <IpLeastSquareMults.hpp>
```

Inheritance diagram for Ipopt::LeastSquareMultipliers:

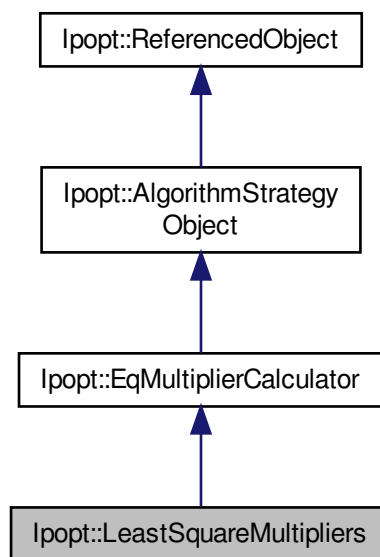

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [CalculateMultipliers](#) ([Vector](#) &y_c, [Vector](#) &y_d)
This method computes the least-square estimates for y_c and y_d at the current point.

Constructors/Destructors

- [LeastSquareMultipliers](#) ([AugSystemSolver](#) &augSysSolver)
Constructor.
- virtual [~LeastSquareMultipliers](#) ()
Default destructor.

Additional Inherited Members

3.83.1 Detailed Description

Class for calculator for the least-square equality constraint multipliers.

The Calculate method of this class computes the least-square estimate for the `y_c` and `y_d` multipliers, based on the current values of the gradient of the Lagrangian.

Definition at line 23 of file `IpLeastSquareMults.hpp`.

3.83.2 Constructor & Destructor Documentation

3.83.2.1 Ipopt::LeastSquareMultipliers::LeastSquareMultipliers (AugSystemSolver & augSysSolver)

Constructor.

It needs to be given the strategy object for solving the augmented system.

3.83.3 Member Function Documentation

3.83.3.1 virtual bool Ipopt::LeastSquareMultipliers::CalculateMultipliers (Vector & y_c, Vector & y_d) [virtual]

This method computes the least-square estimates for `y_c` and `y_d` at the current point.

The return value is false, if the least square system could not be solved (the linear system is singular).

Implements [Ipopt::EqMultiplierCalculator](#).

The documentation for this class was generated from the following file:


- `IpLeastSquareMults.hpp`

3.84 Ipopt::LimMemQuasiNewtonUpdater Class Reference

Implementation of the [HessianUpdater](#) for limit-memory quasi-Newton approximation of the Lagrangian Hessian.

```
#include <IpLimMemQuasiNewtonUpdater.hpp>
```

Inheritance diagram for Ipopt::LimMemQuasiNewtonUpdater:

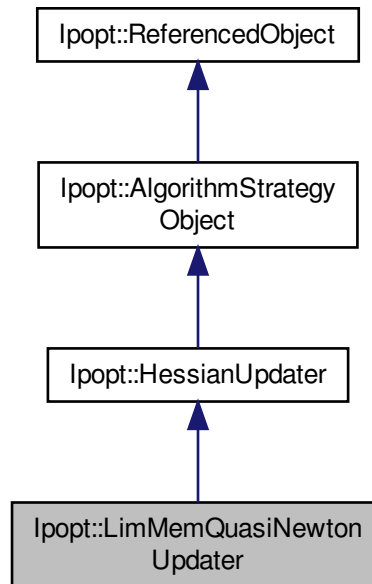

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual void [UpdateHessian](#) ()
Update the Hessian based on the current information in IpData.

Constructors/Destructors

- [LimMemQuasiNewtonUpdater](#) (bool update_for_resto)
Default Constructor.
- virtual [~LimMemQuasiNewtonUpdater](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)
Methods for [OptionsList](#).

Additional Inherited Members

3.84.1 Detailed Description

Implementation of the [HessianUpdater](#) for limit-memory quasi-Newton approximation of the Lagrangian Hessian.

Definition at line 25 of file IpLimMemQuasiNewtonUpdater.hpp.

The documentation for this class was generated from the following file:


- IpLimMemQuasiNewtonUpdater.hpp

3.85 Ipopt::LineSearch Class Reference

Base class for line search objects.

```
#include <IpLineSearch.hpp>
```

Inheritance diagram for Ipopt::LineSearch:

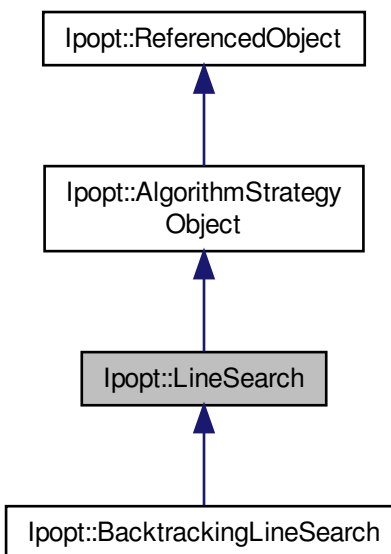

Public Member Functions

- virtual void [FindAcceptableTrialPoint](#) ()=0
Perform the line search.
- virtual void [Reset](#) ()=0
Reset the line search.
- virtual void [SetRigorousLineSearch](#) (bool rigorous)=0
Set flag indicating whether a very rigorous line search should be performed.
- virtual bool [CheckSkippedLineSearch](#) ()=0

Check if the line search procedure didn't accept a new iterate during the last call of [FindAcceptableTrialPoint\(\)](#).

- virtual bool [ActivateFallbackMechanism](#) ()=0

This method should be called if the optimization process requires the line search object to switch to some fallback mechanism (like the restoration phase), when the regular optimization procedure cannot be continued (for example, because the search direction could not be computed).

Constructors/Destructors

- [LineSearch](#) ()

Default Constructor.

- virtual [~LineSearch](#) ()

Default destructor.

Additional Inherited Members

3.85.1 Detailed Description

Base class for line search objects.

Definition at line 20 of file IpLineSearch.hpp.

3.85.2 Member Function Documentation

3.85.2.1 virtual void Ipopt::LineSearch::FindAcceptableTrialPoint () [pure virtual]

Perform the line search.

As search direction the delta in the data object is used

Implemented in [Ipopt::BacktrackingLineSearch](#).

3.85.2.2 virtual void Ipopt::LineSearch::Reset () [pure virtual]

Reset the line search.

This function should be called if all previous information should be discarded when the line search is performed the next time. For example, this method should be called after the barrier parameter is changed.

Implemented in [Ipopt::BacktrackingLineSearch](#).

3.85.2.3 virtual void Ipopt::LineSearch::SetRigorousLineSearch (bool rigorous) [pure virtual]

Set flag indicating whether a very rigorous line search should be performed.

If this flag is set to true, the line search algorithm might decide to abort the line search and not to accept a new iterate. If the line search decided not to accept a new iterate, the return value of [CheckSkippedLineSearch\(\)](#) is true at the next call. For example, in the non-monotone barrier parameter update procedure, the filter algorithm should not switch to the restoration phase in the free mode; instead, the algorithm should switch to the fixed mode.

Implemented in [Ipopt::BacktrackingLineSearch](#).

3.85.2.4 virtual bool Ipopt::LineSearch::ActivateFallbackMechanism () [pure virtual]

This method should be called if the optimization process requires the line search object to switch to some fallback mechanism (like the restoration phase), when the regular optimization procedure cannot be continued (for example, because the search direction could not be computed).

This will cause the line search object to immediately proceed with this mechanism when [FindAcceptableTrialPoint\(\)](#) is call. This method returns false if no fallback mechanism is available.

Implemented in [Ipopt::BacktrackingLineSearch](#).

The documentation for this class was generated from the following file:


- IpLineSearch.hpp

3.86 Ipopt::LoqoMuOracle Class Reference

Implementation of the LOQO formula for computing the barrier parameter.

```
#include <IpLoqoMuOracle.hpp>
```

Inheritance diagram for Ipopt::LoqoMuOracle:

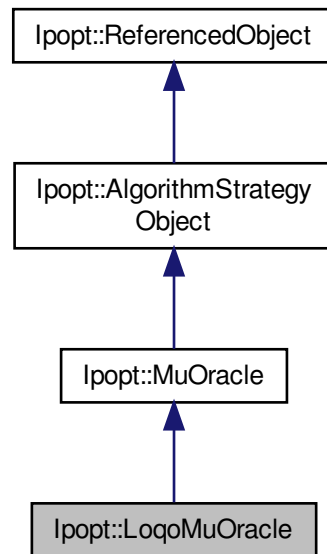

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
Initialize method - overloaded from [AlgorithmStrategyObject](#).
- virtual bool [CalculateMu](#) (Number mu_min, Number mu_max, Number &new_mu)
Method for computing the value of the barrier parameter that could be used in the current iteration (using the LOQO formula).

Constructors/Destructors

- [LoqoMuOracle](#) ()

- *Default Constructor.*
• virtual [~LoqoMuOracle](#) ()
Default destructor.

Additional Inherited Members

3.86.1 Detailed Description

Implementation of the LOQO formula for computing the barrier parameter.

Definition at line 20 of file IpLoqoMuOracle.hpp.

The documentation for this class was generated from the following file:


- IpLoqoMuOracle.hpp

3.87 Ipopt::LowRankAugSystemSolver Class Reference

Solver for the augmented system with [LowRankUpdateSymMatrix](#) Hessian matrices.

```
#include <IpLowRankAugSystemSolver.hpp>
```

Inheritance diagram for Ipopt::LowRankAugSystemSolver:

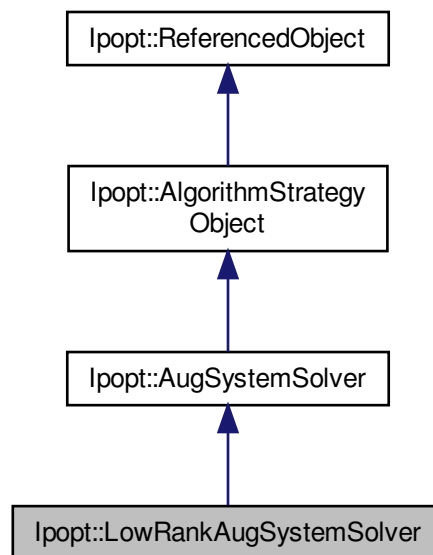

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)

- virtual ESymSolverStatus [Solve](#) (const [SymMatrix](#) *W, double W_factor, const [Vector](#) *D_x, double delta_x, const [Vector](#) *D_s, double delta_s, const [Matrix](#) *J_c, const [Vector](#) *D_c, double delta_c, const [Matrix](#) *J_d, const [Vector](#) *D_d, double delta_d, const [Vector](#) &rhs_x, const [Vector](#) &rhs_s, const [Vector](#) &rhs_c, const [Vector](#) &rhs_d, [Vector](#) &sol_x, [Vector](#) &sol_s, [Vector](#) &sol_c, [Vector](#) &sol_d, bool check_NegEVals, Index numberOfNegEVals)
Set up the augmented system and solve it for a given right hand side.
- virtual Index [NumberOfNegEVals](#) () const
Number of negative eigenvalues detected during last solve.
- virtual bool [ProvidesInertia](#) () const
Query whether inertia is computed by linear solver.
- virtual bool [IncreaseQuality](#) ()
Request to increase quality of solution for next solve.

Constructors/Destructors

- [LowRankAugSystemSolver](#) ([AugSystemSolver](#) &aug_system_solver)
Constructor using only a linear solver object.
- virtual [~LowRankAugSystemSolver](#) ()
Default destructor.

Additional Inherited Members

3.87.1 Detailed Description

Solver for the augmented system with [LowRankUpdateSymMatrix](#) Hessian matrices.

This version works with the Sherman-Morrison formula and multiple backsolves.

Definition at line 24 of file IpLowRankAugSystemSolver.hpp.

3.87.2 Member Function Documentation

3.87.2.1 virtual Index Ipopt::LowRankAugSystemSolver::NumberOfNegEVals () const [virtual]

Number of negative eigenvalues detected during last solve.

Returns the number of negative eigenvalues of the most recent factorized matrix. This must not be called if the linear solver does not compute this quantities (see ProvidesInertia).

Implements [Ipopt::AugSystemSolver](#).

3.87.2.2 virtual bool Ipopt::LowRankAugSystemSolver::ProvidesInertia () const [virtual]

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implements [Ipopt::AugSystemSolver](#).

3.87.2.3 virtual bool Ipopt::LowRankAugSystemSolver::IncreaseQuality () [virtual]

Request to increase quality of solution for next solve.

Ask underlying linear solver to increase quality of solution for the next solve (e.g. increase pivot tolerance). Returns false, if this is not possible (e.g. maximal pivot tolerance already used.)

Implements [Ipopt::AugSystemSolver](#).

The documentation for this class was generated from the following file:


- IpLowRankAugSystemSolver.hpp

3.88 Ipopt::LowRankSSAugSystemSolver Class Reference

Solver for the augmented system with [LowRankUpdateSymMatrix](#) Hessian matrices.

```
#include <IpLowRankSSAugSystemSolver.hpp>
```

Inheritance diagram for Ipopt::LowRankSSAugSystemSolver:

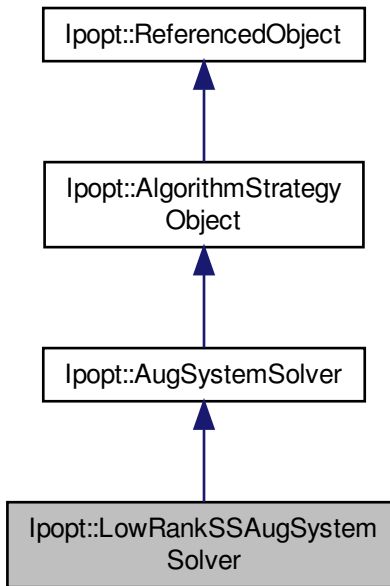

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual ESymSolverStatus [Solve](#) (const [SymMatrix](#) *W, double W_factor, const [Vector](#) *D_x, double delta_x, const [Vector](#) *D_s, double delta_s, const [Matrix](#) *J_c, const [Vector](#) *D_c, double delta_c, const [Matrix](#) *J_d, const [Vector](#) *D_d, double delta_d, const [Vector](#) &rhs_x, const [Vector](#) &rhs_s, const [Vector](#) &rhs_c, const [Vector](#) &rhs_d, [Vector](#) &sol_x, [Vector](#) &sol_s, [Vector](#) &sol_c, [Vector](#) &sol_d, bool check_NegEVals, Index numberOfNegEVals)
Set up the augmented system and solve it for a given right hand side.
- virtual Index [NumberOfNegEVals](#) () const
Number of negative eigenvalues detected during last solve.
- virtual bool [ProvidesInertia](#) () const
Query whether inertia is computed by linear solver.
- virtual bool [IncreaseQuality](#) ()
Request to increase quality of solution for next solve.

Constructors/Destructors

- [LowRankSSAugSystemSolver](#) ([AugSystemSolver](#) &aug_system_solver, Index max_rank)
Constructor using an existing augmented system solver.
- virtual [~LowRankSSAugSystemSolver](#) ()
Default destructor.

Additional Inherited Members**3.88.1 Detailed Description**

Solver for the augmented system with [LowRankUpdateSymMatrix](#) Hessian matrices.

This version works with only one backsolve (so it is better for iterative linear solvers), by augmenting the regular augmented system.

Definition at line 27 of file IpLowRankSSAugSystemSolver.hpp.

3.88.2 Constructor & Destructor Documentation**3.88.2.1 Ipopt::LowRankSSAugSystemSolver::LowRankSSAugSystemSolver ([AugSystemSolver](#) & *aug_system_solver*, Index *max_rank*)**

Constructor using an existing augmented system solver.

the max_rank argument is the maximal rank that can appear.

3.88.3 Member Function Documentation**3.88.3.1 virtual Index Ipopt::LowRankSSAugSystemSolver::NumberOfNegEVals () const [virtual]**

Number of negative eigenvalues detected during last solve.

Returns the number of negative eigenvalues of the most recent factorized matrix. This must not be called if the linear solver does not compute this quantities (see ProvidesInertia).

Implements [Ipopt::AugSystemSolver](#).

3.88.3.2 virtual bool Ipopt::LowRankSSAugSystemSolver::ProvidesInertia () const [virtual]

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implements [Ipopt::AugSystemSolver](#).

3.88.3.3 virtual bool Ipopt::LowRankSSAugSystemSolver::IncreaseQuality () [virtual]

Request to increase quality of solution for next solve.

Ask underlying linear solver to increase quality of solution for the next solve (e.g. increase pivot tolerance). Returns false, if this is not possible (e.g. maximal pivot tolerance already used.)

Implements [Ipopt::AugSystemSolver](#).

The documentation for this class was generated from the following file:


- IpLowRankSSAugSystemSolver.hpp

3.89 Ipopt::LowRankUpdateSymMatrix Class Reference

Class for symmetric matrices, represented as low-rank updates.

```
#include <IpLowRankUpdateSymMatrix.hpp>
```

Inheritance diagram for Ipopt::LowRankUpdateSymMatrix:

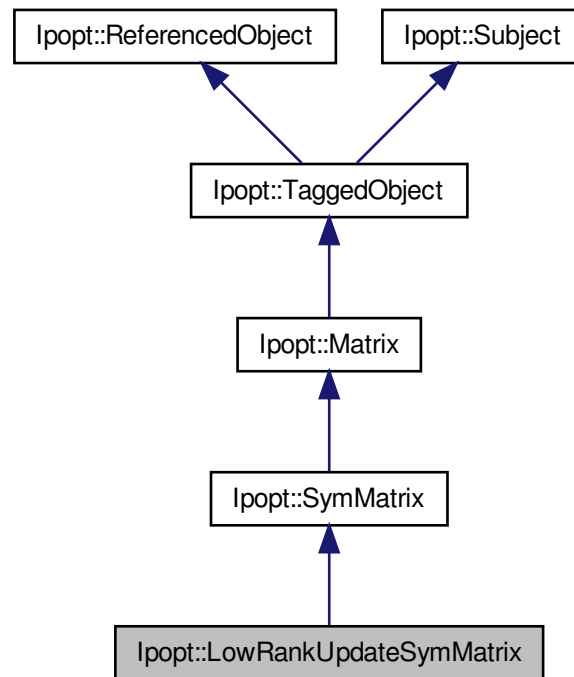

Public Member Functions

- void **SetDiag** (const **Vector** &D)
*Method for setting the diagonal elements (as a **Vector**).*
- **SmartPtr**< const **Vector** > **GetDiag** () const
Method for getting the diagonal elements.
- void **SetV** (const **MultiVectorMatrix** &V)
Method for setting the positive low-rank update part.
- **SmartPtr**< const **MultiVectorMatrix** > **GetV** () const
Method for getting the positive low-rank update part.
- void **SetU** (const **MultiVectorMatrix** &U)
Method for setting the negative low-rank update part.
- **SmartPtr**< const **MultiVectorMatrix** > **GetU** () const
Method for getting the negative low-rank update part.
- **SmartPtr**< const **Matrix** > **P_LowRank** () const

Return the expansion matrix to lift the low-rank update to the higher-dimensional space.

- [SmartPtr](#)< const [VectorSpace](#) > [LowRankVectorSpace](#) () const

Return the vector space in with the low-rank update vectors live.

- bool [ReducedDiag](#) () const

Flag indicating whether the diagonal term lives in the smaller space (from P_LowRank) or in the full space.

Constructors / Destructors

- [LowRankUpdateSymMatrix](#) (const [LowRankUpdateSymMatrixSpace](#) *owner_space)

Constructor, given the corresponding matrix space.

- [~LowRankUpdateSymMatrix](#) ()

Destructor.

Protected Member Functions

Methods overloaded from matrix

- virtual void [MultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const

Matrix-vector multiply.

- virtual bool [IsValidNumbersImpl](#) () const

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

- virtual void [ComputeRowAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const

Compute the max-norm of the rows in the matrix.

- virtual void [ComputeColAMaxImpl](#) ([Vector](#) &cols_norms, bool init) const

Since the matrix is symmetric, the row and column max norms are identical.

- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const

Print detailed information about the matrix.

Additional Inherited Members

3.89.1 Detailed Description

Class for symmetric matrices, represented as low-rank updates.

The matrix M is represented as $M = P_LR(D + V V^T - U U^T)P_LR^T$ (if reduced_diag is true), or $M = D + P_LR(V V^T - U U^T)P_LR^T$ (if reduced_diag is false). D is a diagonal matrix, and V and U are MultiVectorMatrices, and P_LR is an [ExpansionMatrix](#). The vectors in the low-rank update (before expansion) live in the LowRankVectorSpace. If P_LR is NULL, P_LR is assumed to be the identity matrix. If V or U is NULL, it is assume to be a matrix of zero columns.

Definition at line 31 of file IpLowRankUpdateSymMatrix.hpp.

3.89.2 Constructor & Destructor Documentation

3.89.2.1 Ipopt::LowRankUpdateSymMatrix::LowRankUpdateSymMatrix (const LowRankUpdateSymMatrixSpace * owner_space)

Constructor, given the corresponding matrix space.

3.89.3 Member Function Documentation

3.89.3.1 void Ipopt::LowRankUpdateSymMatrix::SetDiag (const Vector & D) [inline]

Method for setting the diagonal elements (as a [Vector](#)).

Definition at line 46 of file IpLowRankUpdateSymMatrix.hpp.

3.89.3.2 SmartPtr<const Vector> Ipopt::LowRankUpdateSymMatrix::GetDiag () const [inline]

Method for getting the diagonal elements.

Definition at line 53 of file IpLowRankUpdateSymMatrix.hpp.

3.89.3.3 void Ipopt::LowRankUpdateSymMatrix::SetV (const MultiVectorMatrix & V) [inline]

Method for setting the positive low-rank update part.

Definition at line 59 of file IpLowRankUpdateSymMatrix.hpp.

3.89.3.4 SmartPtr<const MultiVectorMatrix> Ipopt::LowRankUpdateSymMatrix::GetV () const [inline]

Method for getting the positive low-rank update part.

Definition at line 66 of file IpLowRankUpdateSymMatrix.hpp.

3.89.3.5 void Ipopt::LowRankUpdateSymMatrix::SetU (const MultiVectorMatrix & U) [inline]

Method for setting the negative low-rank update part.

Definition at line 72 of file IpLowRankUpdateSymMatrix.hpp.

3.89.3.6 SmartPtr<const MultiVectorMatrix> Ipopt::LowRankUpdateSymMatrix::GetU () const [inline]

Method for getting the negative low-rank update part.

Definition at line 79 of file IpLowRankUpdateSymMatrix.hpp.

3.89.3.7 SmartPtr<const Matrix> Ipopt::LowRankUpdateSymMatrix::P_LowRank () const [inline]

Return the expansion matrix to lift the low-rank update to the higher-dimensional space.

Definition at line 237 of file IpLowRankUpdateSymMatrix.hpp.

3.89.3.8 SmartPtr<const VectorSpace> Ipopt::LowRankUpdateSymMatrix::LowRankVectorSpace () const [inline]

Return the vector space in with the low-rank update vectors live.

Definition at line 243 of file IpLowRankUpdateSymMatrix.hpp.

3.89.3.9 bool Ipopt::LowRankUpdateSymMatrix::ReducedDiag () const [inline]

Flag indicating whether the diagonal term lives in the smaller space (from P_LowRank) or in the full space.

Definition at line 249 of file IpLowRankUpdateSymMatrix.hpp.

3.89.3.10 virtual void Ipopt::LowRankUpdateSymMatrix::MultVectorImpl (Number *alpha*, const Vector & x, Number *beta*, Vector & y) const [protected], [virtual]

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.89.3.11 `virtual bool Ipopt::LowRankUpdateSymMatrix::IsValidNumbersImpl ( ) const` `[protected]`, `[virtual]`

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Reimplemented from [Ipopt::Matrix](#).

3.89.3.12 `virtual void Ipopt::LowRankUpdateSymMatrix::ComputeRowAMaxImpl ( Vector & rows_norms, bool init ) const` `[protected]`, `[virtual]`

Compute the max-norm of the rows in the matrix.

The result is stored in rows_norms. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.89.3.13 `virtual void Ipopt::LowRankUpdateSymMatrix::PrintImpl ( const Journalist & jnlst, EJournalLevel level, EJournalCategory category, const std::string & name, Index indent, const std::string & prefix ) const` `[protected]`, `[virtual]`

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

The documentation for this class was generated from the following file:


- IpLowRankUpdateSymMatrix.hpp

3.90 Ipopt::LowRankUpdateSymMatrixSpace Class Reference

This is the matrix space for [LowRankUpdateSymMatrix](#).

```
#include <IpLowRankUpdateSymMatrix.hpp>
```

Inheritance diagram for Ipopt::LowRankUpdateSymMatrixSpace:

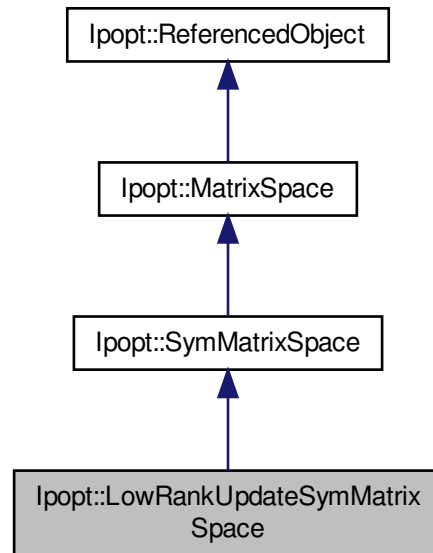

Public Member Functions

- virtual [SymMatrix](#) * [MakeNewSymMatrix](#) () const
Overloaded MakeNew method for the [SymMatrixSpace](#) base class.
- [LowRankUpdateSymMatrix](#) * [MakeNewLowRankUpdateSymMatrix](#) () const
Method for creating a new matrix of this specific type.

Constructors / Destructors

- [LowRankUpdateSymMatrixSpace](#) (Index dim, [SmartPtr](#)< const [Matrix](#) > P_LowRank, [SmartPtr](#)< const [VectorSpace](#) > LowRankVectorSpace, bool reduced_diag)
Constructor, given the dimension of the matrix.
- virtual [~LowRankUpdateSymMatrixSpace](#) ()
Destructor.

3.90.1 Detailed Description

This is the matrix space for [LowRankUpdateSymMatrix](#).

Definition at line 151 of file [IpLowRankUpdateSymMatrix.hpp](#).

3.90.2 Constructor & Destructor Documentation

3.90.2.1 `Ipopt::LowRankUpdateSymMatrixSpace::LowRankUpdateSymMatrixSpace ( Index dim, SmartPtr< const Matrix > P_LowRank, SmartPtr< const VectorSpace > LowRankVectorSpace, bool reduced_diag ) [inline]`

Constructor, given the dimension of the matrix.

Definition at line 157 of file `IpLowRankUpdateSymMatrix.hpp`.

3.90.3 Member Function Documentation

3.90.3.1 `LowRankUpdateSymMatrix* Ipopt::LowRankUpdateSymMatrixSpace::MakeNewLowRankUpdateSymMatrix ( ) const [inline]`

Method for creating a new matrix of this specific type.

Definition at line 183 of file `IpLowRankUpdateSymMatrix.hpp`.

The documentation for this class was generated from the following file:


- `IpLowRankUpdateSymMatrix.hpp`

3.91 Ipopt::Ma27TSolverInterface Class Reference

Interface to the symmetric linear solver MA27, derived from [SparseSymLinearSolverInterface](#).

```
#include <IpMa27TSolverInterface.hpp>
```

Inheritance diagram for `Ipopt::Ma27TSolverInterface`:

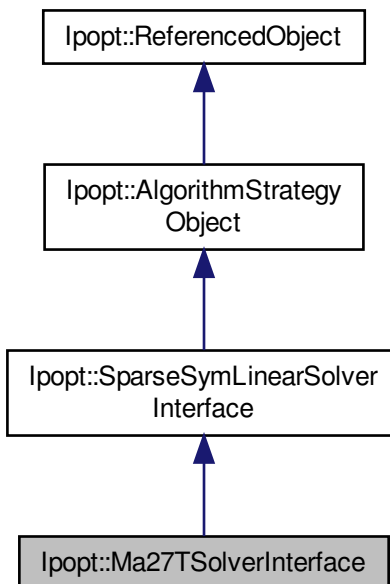

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)

Constructor/Destructor

- [Ma27TSolverInterface](#) ()
Constructor.
- virtual [~Ma27TSolverInterface](#) ()
Destructor.

Methods for requesting solution of the linear system.

- virtual ESymSolverStatus [InitializeStructure](#) (Index dim, Index nonzeros, const Index *airn, const Index *ajcn)
Method for initializing internal stuctures.
- virtual double * [GetValuesArrayPtr](#) ()
Method returng an internal array into which the nonzero elements (in the same order as airn and ajcn) are to be stored by the calling routine before a call to MultiSolve with a new_matrix=true.
- virtual ESymSolverStatus [MultiSolve](#) (bool new_matrix, const Index *airn, const Index *ajcn, Index nrhs, double *rhs_vals, bool check_NegEVals, Index numberOfNegEVals)
Solve operation for multiple right hand sides.
- virtual Index [NumberOfNegEVals](#) () const
Number of negative eigenvalues detected during last factorization.
- virtual bool [IncreaseQuality](#) ()
Request to increase quality of solution for next solve.
- virtual bool [ProvidesInertia](#) () const
Query whether inertia is computed by linear solver.
- [EMatrixFormat](#) [MatrixFormat](#) () const
Query of requested matrix type that the linear solver understands.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members

3.91.1 Detailed Description

Interface to the symmetric linear solver MA27, derived from [SparseSymLinearSolverInterface](#).

Definition at line 19 of file IpMa27TSolverInterface.hpp.

3.91.2 Member Function Documentation

- 3.91.2.1 virtual ESymSolverStatus Ipopt::Ma27TSolverInterface::InitializeStructure (Index *dim*, Index *nonzeros*, const Index * *airn*, const Index * *ajcn*) [virtual]

Method for initializing internal stuctures.

Here, `ndim` gives the number of rows and columns of the matrix, `nonzeros` give the number of nonzero elements, and `airn` and `ajcn` give the positions of the nonzero elements.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.91.2.2 `virtual double* Ipopt::Ma27TSolverInterface::GetValuesArrayPtr ( ) [virtual]`

Method returning an internal array into which the nonzero elements (in the same order as `airn` and `ajcn`) are to be stored by the calling routine before a call to `MultiSolve` with a `new_matrix=true`.

The returned array must have space for at least nonzero elements.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.91.2.3 `virtual ESymSolverStatus Ipopt::Ma27TSolverInterface::MultiSolve ( bool new_matrix, const Index * airn, const Index * ajcn, Index nrhs, double * rhs_vals, bool check_NegEVals, Index numberOfNegEVals ) [virtual]`

Solve operation for multiple right hand sides.

Overloaded from [SparseSymLinearSolverInterface](#).

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.91.2.4 `virtual Index Ipopt::Ma27TSolverInterface::NumberOfNegEVals ( ) const [virtual]`

Number of negative eigenvalues detected during last factorization.

Returns the number of negative eigenvalues of the most recent factorized matrix. This must not be called if the linear solver does not compute this quantities (see `ProvidesInertia`).

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.91.2.5 `virtual bool Ipopt::Ma27TSolverInterface::IncreaseQuality ( ) [virtual]`

Request to increase quality of solution for next solve.

Ask linear solver to increase quality of solution for the next solve (e.g. increase pivot tolerance). Returns false, if this is not possible (e.g. maximal pivot tolerance already used.)

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.91.2.6 `virtual bool Ipopt::Ma27TSolverInterface::ProvidesInertia ( ) const [inline],[virtual]`

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 86 of file `IpMa27TSolverInterface.hpp`.

The documentation for this class was generated from the following file:


- `IpMa27TSolverInterface.hpp`

3.92 Ipopt::Ma28TDependencyDetector Class Reference

Base class for all derived algorithms for detecting linearly dependent rows in the constraint Jacobian.

```
#include <IpMa28TDependencyDetector.hpp>
```

Inheritance diagram for Ipopt::Ma28TDependencyDetector:

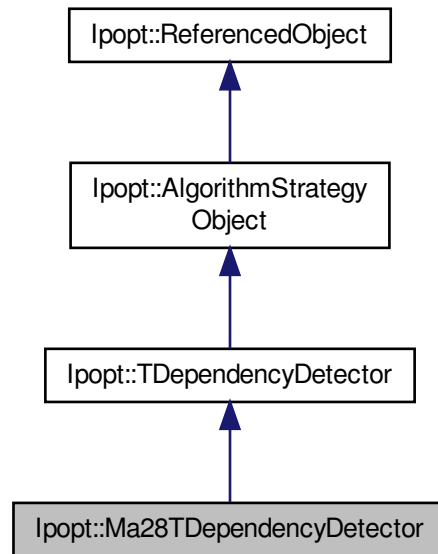

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
Has to be called to initialize and reset these objects.
- virtual bool [DetermineDependentRows](#) (Index n_rows, Index n_cols, Index n_jac_nz, Number *jac_c_vals, Index *jac_c_iRow, Index *jac_c_jCol, std::list< Index > &c_deps)
Method determining the number of linearly dependent rows in the matrix and the indices of those rows.

Constructor/Destructor

- **Ma28TDependencyDetector** ()
- virtual **~Ma28TDependencyDetector** ()

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
This must be called to make the options for this class known.

Additional Inherited Members

3.92.1 Detailed Description

Base class for all derived algorithms for detecting linearly dependent rows in the constraint Jacobian.

Definition at line 19 of file IpMa28TDependencyDetector.hpp.

3.92.2 Member Function Documentation

3.92.2.1 `virtual bool Ipopt::Ma28TDependencyDetector::InitializeImpl ( const OptionsList & options, const std::string & prefix )`
`[virtual]`

Has to be called to initialize and reset these objects.

Implements [Ipopt::TDependencyDetector](#).

3.92.2.2 `virtual bool Ipopt::Ma28TDependencyDetector::DetermineDependentRows ( Index n_rows, Index n_cols, Index n_jac_nz, Number * jac_c_vals, Index * jac_c_iRow, Index * jac_c_jCol, std::list< Index > & c_deps )` `[virtual]`

Method determining the number of linearly dependent rows in the matrix and the indices of those rows.

We assume that the matrix is available in "Triplet" format (MA28 format), and that the arrays given to this method can be modified internally, i.e., they are not used by the calling program anymore after this call. This method returns false if there was a problem with the underlying linear solver.

Implements [Ipopt::TDependencyDetector](#).

The documentation for this class was generated from the following file:


- `IpMa28TDependencyDetector.hpp`

3.93 Ipopt::Ma57TSolverInterface Class Reference

Interface to the symmetric linear solver MA57, derived from [SparseSymLinearSolverInterface](#).

```
#include <IpMa57TSolverInterface.hpp>
```

Inheritance diagram for Ipopt::Ma57TSolverInterface:

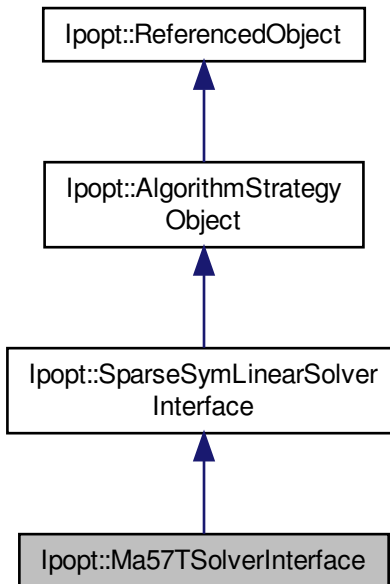

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)

Constructor/Destructor

- [Ma57TSolverInterface](#) ()
Constructor.
- virtual [~Ma57TSolverInterface](#) ()
Destructor.

Methods for requesting solution of the linear system.

- virtual ESymSolverStatus [InitializeStructure](#) (Index dim, Index nonzeros, const Index *airn, const Index *ajcn)
Method for initializing internal structures.
- virtual double * [GetValuesArrayPtr](#) ()
Method returning an internal array into which the nonzero elements (in the same order as airn and ajcn) are to be stored by the calling routine before a call to MultiSolve with a new_matrix=true.
- virtual ESymSolverStatus [MultiSolve](#) (bool new_matrix, const Index *airn, const Index *ajcn, Index nrhs, double *rhs_vals, bool check_NegEVals, Index numberOfNegEVals)
Solve operation for multiple right hand sides.
- virtual Index [NumberOfNegEVals](#) () const
Number of negative eigenvalues detected during last factorization.

- virtual bool [IncreaseQuality](#) ()
Request to increase quality of solution for next solve.
- virtual bool [ProvidesInertia](#) () const
Query whether inertia is computed by linear solver.
- [EMatrixFormat](#) [MatrixFormat](#) () const
Query of requested matrix type that the linear solver understands.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members

3.93.1 Detailed Description

Interface to the symmetric linear solver MA57, derived from [SparseSymLinearSolverInterface](#).

Definition at line 27 of file IpMa57TSolverInterface.hpp.

3.93.2 Member Function Documentation

3.93.2.1 virtual ESymSolverStatus Ipopt::Ma57TSolverInterface::InitializeStructure (Index *dim*, Index *nonzeros*, const Index * *airn*, const Index * *ajcn*) [virtual]

Method for initializing internal structures.

Here, ndim gives the number of rows and columns of the matrix, nonzeros give the number of nonzero elements, and airn and ajcn give the positions of the nonzero elements.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.93.2.2 virtual double* Ipopt::Ma57TSolverInterface::GetValuesArrayPtr () [virtual]

Method returning an internal array into which the nonzero elements (in the same order as airn and ajcn) are to be stored by the calling routine before a call to MultiSolve with a new_matrix=true.

The returned array must have space for at least nonzero elements.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.93.2.3 virtual ESymSolverStatus Ipopt::Ma57TSolverInterface::MultiSolve (bool *new_matrix*, const Index * *airn*, const Index * *ajcn*, Index *nrhs*, double * *rhs_vals*, bool *check_NegEVals*, Index *numberOfNegEVals*) [virtual]

Solve operation for multiple right hand sides.

Overloaded from [SparseSymLinearSolverInterface](#).

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.93.2.4 virtual Index Ipopt::Ma57TSolverInterface::NumberOfNegEVals () const [virtual]

Number of negative eigenvalues detected during last factorization.

Returns the number of negative eigenvalues of the most recent factorized matrix. This must not be called if the linear solver does not compute this quantities (see ProvidesInertia).

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.93.2.5 `virtual bool Ipopt::Ma57TSolverInterface::IncreaseQuality ( ) [virtual]`

Request to increase quality of solution for next solve.

Ask linear solver to increase quality of solution for the next solve (e.g. increase pivot tolerance). Returns false, if this is not possible (e.g. maximal pivot tolerance already used.)

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.93.2.6 `virtual bool Ipopt::Ma57TSolverInterface::ProvidesInertia ( ) const [inline],[virtual]`

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 96 of file IpMa57TSolverInterface.hpp.

The documentation for this class was generated from the following file:

- IpMa57TSolverInterface.hpp

3.94 ma77_control_d Struct Reference

3.94.1 Detailed Description

Definition at line 38 of file hsl_ma77d.h.

The documentation for this struct was generated from the following file:

- hsl_ma77d.h

3.95 ma77_info_d Struct Reference

3.95.1 Detailed Description

Definition at line 98 of file hsl_ma77d.h.

The documentation for this struct was generated from the following file:


- hsl_ma77d.h

3.96 Ipopt::Ma77SolverInterface Class Reference

Base class for interfaces to symmetric indefinite linear solvers for sparse matrices.

```
#include <IpMa77SolverInterface.hpp>
```

Inheritance diagram for Ipopt::Ma77SolverInterface:

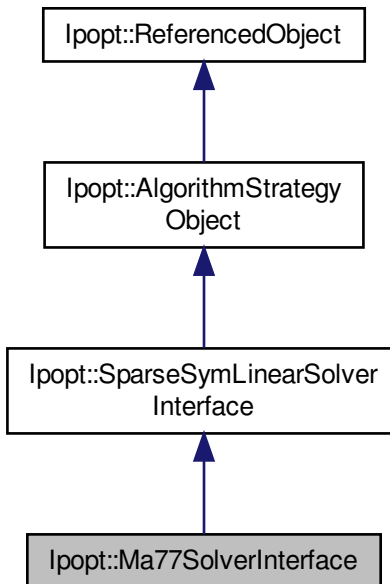

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)

Methods for requesting solution of the linear system.

- ESymSolverStatus [InitializeStructure](#) (Index dim, Index nonzeros, const Index *ia, const Index *ja)
Method for initializing internal structures.
- double * [GetValuesArrayPtr](#) ()
Method returning an internal array into which the nonzero elements (in the same order as ja) will be stored by the calling routine before a call to MultiSolve with a new_matrix=true (or after a return of MultiSolve with SYMSOLV_CALL_AGA-IN).
- ESymSolverStatus [MultiSolve](#) (bool new_matrix, const Index *ia, const Index *ja, Index nrhs, double *rhs_vals, bool check_NegEVals, Index numberOfNegEVals)
Solve operation for multiple right hand sides.
- Index [NumberOfNegEVals](#) () const
Number of negative eigenvalues detected during last factorization.
- bool [IncreaseQuality](#) ()
Request to increase quality of solution for next solve.
- bool [ProvidesInertia](#) () const
Query whether inertia is computed by linear solver.

- [EMatrixFormat](#) [MatrixFormat](#) () const
Query of requested matrix type that the linear solver understands.

Methods related to the detection of linearly dependent

rows in a matrix

- bool [ProvidesDegeneracyDetection](#) () const
Query whether the indices of linearly dependent rows/columns can be determined by this linear solver.
- [ESymSolverStatus](#) [DetermineDependentRows](#) (const Index *ia, const Index *ja, std::list< Index > &c_deps)
This method determines the list of row indices of the linearly dependent rows.

Additional Inherited Members

3.96.1 Detailed Description

Base class for interfaces to symmetric indefinite linear solvers for sparse matrices.

This defines the general interface to linear solvers for sparse symmetric indefinite matrices. The matrices can be provided either in "triplet format" (like for Harwell's MA27 solver), or in compressed sparse row (CSR) format for the lower triangular part of the symmetric matrix.

The solver should be able to compute the inertia of the matrix, or more specifically, the number of negative eigenvalues in the factorized matrix.

This interface is used by the calling objective in the following way:

1. The `InitializeImpl` method is called at the very beginning (for every optimization run), which allows the linear solver object to retrieve options given in the [OptionsList](#) (such as pivot tolerances etc). At this point, some internal data can also be initialized.
1. The calling class calls `MatrixFormat` to find out which matrix representation the linear solver requires. The possible options are `Triplet_Format`, as well as `CSR_Format_0_Offset` and `CSR_Format_1_Offset`. The difference between the last two is that for `CSR_Format_0_Offset` the counting of the element position in the `ia` and `ja` arrays starts are 0 (C-style numbering), whereas for the other one it starts at 1 (Fortran-style numbering).
1. After this, the `InitializeStructure` method is called (once). Here, the structure of the matrix is provided. If the linear solver requires a symbolic preprocessing phase that can be done without knowledge of the matrix element values, it can be done here.
1. The calling class will request an array for storing the actual values for a matrix using the `GetValuesArrayPtr` method. This array must be at least as large as the number of nonzeros in the matrix (as given to this class by the `InitializeStructure` method call). After a call of this method, the calling class will fill this array with the actual values of the matrix.
1. Every time lateron, when actual solves of a linear system is requested, the calling class will call the `MultiSolve` to request the solve, possibly for multiple right-hand sides. The flag `new_matrix` then indicates if the values of the matrix have changed and if a factorization is required, or if an old factorization can be used to do the solve.

Note that the `GetValuesArrayPtr` method will be called before every call of `MultiSolve` with `new_matrix=true`, or before a renewed call of `MultiSolve` if the most previous return value was `SYMSOLV_CALL_AGAIN`.

1. The calling class might request with `NumberOfNegEVals` the number of the negative eigenvalues for the original matrix that were detected during the most recently performed factorization.

1. The calling class might ask the linear solver to increase the quality of the solution. For example, if the linear solver uses a pivot tolerance, a larger value should be used for the next solve (which might require a refactorization).
1. Finally, when the destructor is called, the internal storage, also in the linear solver, should be released.

Note, if the matrix is given in triplet format, entries might be listed multiple times, in which case the corresponding elements have to be added.

A note for warm starts: If the option "warm_start_same_structure" is specified with "yes", the algorithm assumes that a problem with the same sparsity structure is solved for a repeated time. In that case, the linear solver might reuse information from the previous optimization. See [Ma27TSolverInterface](#) for an example.

Definition at line 103 of file IpMa77SolverInterface.hpp.

3.96.2 Member Function Documentation

3.96.2.1 `ESymSolverStatus Ipopt::Ma77SolverInterface::InitializeStructure ( Index dim, Index nonzeros, const Index * ia, const Index * ja ) [virtual]`

Method for initializing internal structures.

Here, *ndim* gives the number of rows and columns of the matrix, *nonzeros* give the number of nonzero elements, and *ia* and *ja* give the positions of the nonzero elements, given in the matrix format determined by `MatrixFormat`.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.96.2.2 `double* Ipopt::Ma77SolverInterface::GetValuesArrayPtr ( ) [inline],[virtual]`

Method returning an internal array into which the nonzero elements (in the same order as *ja*) will be stored by the calling routine before a call to `MultiSolve` with a new_matrix=true (or after a return of `MultiSolve` with `SYMSOLV_CALL_AGAIN`).

The returned array must have space for at least nonzero elements.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 152 of file IpMa77SolverInterface.hpp.

3.96.2.3 `ESymSolverStatus Ipopt::Ma77SolverInterface::MultiSolve ( bool new_matrix, const Index * ia, const Index * ja, Index nrhs, double * rhs_vals, bool check_NegEvals, Index numberOfNegEvals ) [virtual]`

Solve operation for multiple right hand sides.

Solves the linear system $A * x = b$ with multiple right hand sides, where A is the symmetric indefinite matrix. Here, *ia* and *ja* give the positions of the values (in the required matrix data format). The actual values of the matrix will have been given to this object by copying them into the array provided by `GetValuesArrayPtr`. *ia* and *ja* are identical to the ones given to `InitializeStructure`. The flag *new_matrix* is set to true, if the values of the matrix has changed, and a refactorization is required.

The return code is `SYMSOLV_SUCCESS` if the factorization and solves were successful, `SYMSOLV_SINGULAR` if the linear system is singular, and `SYMSOLV_WRONG_INERTIA` if *check_NegEvals* is true and the number of negative eigenvalues in the matrix does not match *numberOfNegEvals*. If `SYMSOLV_CALL_AGAIN` is returned, then the calling function will request the pointer for the array for storing a again (with `GetValuesPtr`), write the values of the nonzero elements into it, and call this `MultiSolve` method again with the same right-hand sides. (This can be done, for example, if the linear solver realized it does not have sufficient memory and needs to redo the factorization; e.g., for MA27.)

The number of right-hand sides is given by *nrhs*, the values of the right-hand sides are given in *rhs_vals* (one full right-hand side stored immediately after the other), and solutions are to be returned in the same array.

check_NegEvals will not be chosen true, if [ProvidesInertia\(\)](#) returns false.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.96.2.4 Index `Ipopt::Ma77SolverInterface::NumberOfNegEvals ( ) const` `[inline],[virtual]`

Number of negative eigenvalues detected during last factorization.

Returns the number of negative eigenvalues of the most recent factorized matrix. This must not be called if the linear solver does not compute this quantities (see `ProvidesInertia`).

Implements [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 203 of file `IpMa77SolverInterface.hpp`.

3.96.2.5 `bool Ipopt::Ma77SolverInterface::IncreaseQuality ( )` `[virtual]`

Request to increase quality of solution for next solve.

The calling class asks linear solver to increase quality of solution for the next solve (e.g. increase pivot tolerance). Returns false, if this is not possible (e.g. maximal pivot tolerance already used.)

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.96.2.6 `bool Ipopt::Ma77SolverInterface::ProvidesInertia ( ) const` `[inline],[virtual]`

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 222 of file `IpMa77SolverInterface.hpp`.

3.96.2.7 `bool Ipopt::Ma77SolverInterface::ProvidesDegeneracyDetection ( ) const` `[inline],[virtual]`

Query whether the indices of linearly dependent rows/columns can be determined by this linear solver.

Reimplemented from [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 241 of file `IpMa77SolverInterface.hpp`.

3.96.2.8 `ESymSolverStatus Ipopt::Ma77SolverInterface::DetermineDependentRows ( const Index * ia, const Index * ja, std::list< Index > & c_deps )` `[inline],[virtual]`

This method determines the list of row indices of the linearly dependent rows.

Reimplemented from [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 247 of file `IpMa77SolverInterface.hpp`.

The documentation for this class was generated from the following file:

- `IpMa77SolverInterface.hpp`

3.97 ma86_control_d Struct Reference

3.97.1 Detailed Description

Definition at line 27 of file `hsl_ma86d.h`.

The documentation for this struct was generated from the following file:

- `hsl_ma86d.h`

3.98 ma86_info_d Struct Reference

3.98.1 Detailed Description

Definition at line 70 of file hsl_ma86d.h.

The documentation for this struct was generated from the following file:


- hsl_ma86d.h

3.99 Ipopt::Ma86SolverInterface Class Reference

Base class for interfaces to symmetric indefinite linear solvers for sparse matrices.

```
#include <IpMa86SolverInterface.hpp>
```

Inheritance diagram for Ipopt::Ma86SolverInterface:

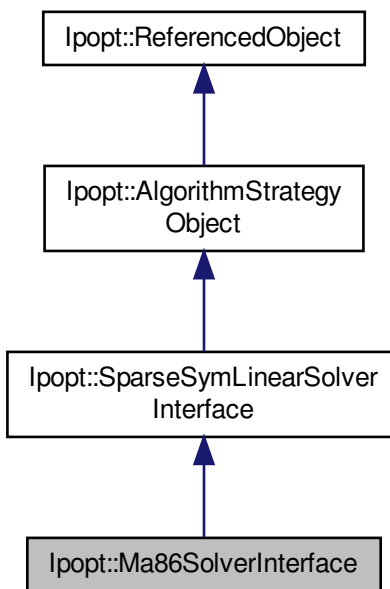

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)

Methods for requesting solution of the linear system.

- ESymSolverStatus [InitializeStructure](#) (Index dim, Index nonzeros, const Index *ia, const Index *ja)
Method for initializing internal stuctures.

- double * [GetValuesArrayPtr](#) ()
Method returning an internal array into which the nonzero elements (in the same order as ja) will be stored by the calling routine before a call to MultiSolve with a new_matrix=true (or after a return of MultiSolve with SYMSOLVE_CAL- L_AGAIN).
- ESymSolverStatus [MultiSolve](#) (bool new_matrix, const Index *ia, const Index *ja, Index nrhs, double *rhs_vals, bool check_NegEVals, Index numberOfNegEVals)
Solve operation for multiple right hand sides.
- Index [NumberOfNegEVals](#) () const
Number of negative eigenvalues detected during last factorization.
- bool [IncreaseQuality](#) ()
Request to increase quality of solution for next solve.
- bool [ProvidesInertia](#) () const
Query whether inertia is computed by linear solver.
- [EMatrixFormat](#) [MatrixFormat](#) () const
Query of requested matrix type that the linear solver understands.

Methods related to the detection of linearly dependent

rows in a matrix

- bool [ProvidesDegeneracyDetection](#) () const
Query whether the indices of linearly dependent rows/columns can be determined by this linear solver.
- ESymSolverStatus [DetermineDependentRows](#) (const Index *ia, const Index *ja, std::list< Index > &c_deps)
This method determines the list of row indices of the linearly dependent rows.

Additional Inherited Members

3.99.1 Detailed Description

Base class for interfaces to symmetric indefinite linear solvers for sparse matrices.

This defines the general interface to linear solvers for sparse symmetric indefinite matrices. The matrices can be provided either in "triplet format" (like for Harwell's MA27 solver), or in compressed sparse row (CSR) format for the lower triangular part of the symmetric matrix.

The solver should be able to compute the inertia of the matrix, or more specifically, the number of negative eigenvalues in the factorized matrix.

This interface is used by the calling objective in the following way:

1. The InitializeImpl method is called at the very beginning (for every optimization run), which allows the linear solver object to retrieve options given in the [OptionsList](#) (such as pivot tolerances etc). At this point, some internal data can also be initialized.
1. The calling class calls MatrixFormat to find out which matrix representation the linear solver requires. The possible options are Triplet_Format, as well as CSR_Format_0_Offset and CSR_Format_1_Offset. The difference between the last two is that for CSR_Format_0_Offset the counting of the element position in the ia and ja arrays starts are 0 (C-style numbering), whereas for the other one it starts at 1 (Fortran-style numbering).
1. After this, the InitializeStructure method is called (once). Here, the structure of the matrix is provided. If the linear solver requires a symbolic preprocessing phase that can be done without knowledge of the matrix element values, it can be done here.

1. The calling class will request an array for storing the actual values for a matrix using the `GetValuesArrayPtr` method. This array must be at least as large as the number of nonzeros in the matrix (as given to this class by the `InitializeStructure` method call). After a call of this method, the calling class will fill this array with the actual values of the matrix.
1. Every time lateron, when actual solves of a linear system is requested, the calling class will call the `MultiSolve` to request the solve, possibly for multiple right-hand sides. The flag `new_matrix` then indicates if the values of the matrix have changed and if a factorization is required, or if an old factorization can be used to do the solve.

Note that the `GetValuesArrayPtr` method will be called before every call of `MultiSolve` with `new_matrix=true`, or before a renewed call of `MultiSolve` if the most previous return value was `SYMSOLV_CALL_AGAIN`.

1. The calling class might request with `NumberOfNegEVals` the number of the negative eigenvalues for the original matrix that were detected during the most recently performed factorization.
1. The calling class might ask the linear solver to increase the quality of the solution. For example, if the linear solver uses a pivot tolerance, a larger value should be used for the next solve (which might require a refactorization).
1. Finally, when the destructor is called, the internal storage, also in the linear solver, should be released.

Note, if the matrix is given in triplet format, entries might be listed multiple times, in which case the corresponding elements have to be added.

A note for warm starts: If the option "warm_start_same_structure" is specified with "yes", the algorithm assumes that a problem with the same sparsity structure is solved for a repeated time. In that case, the linear solver might reuse information from the previous optimization. See [Ma27TSolverInterface](#) for an example.

Definition at line 104 of file `IpMa86SolverInterface.hpp`.

3.99.2 Member Function Documentation

3.99.2.1 `ESymSolverStatus Ipopt::Ma86SolverInterface::InitializeStructure ( Index dim, Index nonzeros, const Index * ia, const Index * ja ) [virtual]`

Method for initializing internal structures.

Here, `ndim` gives the number of rows and columns of the matrix, `nonzeros` give the number of nonzero elements, and `ia` and `ja` give the positions of the nonzero elements, given in the matrix format determined by `MatrixFormat`.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.99.2.2 `double* Ipopt::Ma86SolverInterface::GetValuesArrayPtr ( ) [inline],[virtual]`

Method returning an internal array into which the nonzero elements (in the same order as `ja`) will be stored by the calling routine before a call to `MultiSolve` with a `new_matrix=true` (or after a return of `MultiSolve` with `SYMSOLV_CALL_AGAIN`).

The returned array must have space for at least nonzero elements.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 155 of file `IpMa86SolverInterface.hpp`.

3.99.2.3 `ESymSolverStatus Ipopt::Ma86SolverInterface::MultiSolve ( bool new_matrix, const Index * ia, const Index * ja, Index nrhs, double * rhs.vals, bool check_NegEVals, Index numberOfNegEVals ) [virtual]`

Solve operation for multiple right hand sides.

Solves the linear system $A * x = b$ with multiple right hand sides, where A is the symmetric indefinite matrix. Here, ia and ja give the positions of the values (in the required matrix data format). The actual values of the matrix will have been given to this object by copying them into the array provided by `GetValuesArrayPtr`. ia and ja are identical to the ones given to `InitializeStructure`. The flag `new_matrix` is set to true, if the values of the matrix has changed, and a refactorization is required.

The return code is `SYMSOLV_SUCCESS` if the factorization and solves were successful, `SYMSOLV_SINGULAR` if the linear system is singular, and `SYMSOLV_WRONG_INERTIA` if `check_NegEVals` is true and the number of negative eigenvalues in the matrix does not match `numberOfNegEVals`. If `SYMSOLV_CALL_AGAIN` is returned, then the calling function will request the pointer for the array for storing a again (with `GetValuesPtr`), write the values of the nonzero elements into it, and call this `MultiSolve` method again with the same right-hand sides. (This can be done, for example, if the linear solver realized it does not have sufficient memory and needs to redo the factorization; e.g., for MA27.)

The number of right-hand sides is given by `nrhs`, the values of the right-hand sides are given in `rhs_vals` (one full right-hand side stored immediately after the other), and solutions are to be returned in the same array.

`check_NegEVals` will not be chosen true, if `ProvidesInertia()` returns false.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.99.2.4 Index `Ipopt::Ma86SolverInterface::NumberOfNegEVals ( ) const` `[inline]`, `[virtual]`

Number of negative eigenvalues detected during last factorization.

Returns the number of negative eigenvalues of the most recent factorized matrix. This must not be called if the linear solver does not compute this quantities (see `ProvidesInertia`).

Implements [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 206 of file `IpMa86SolverInterface.hpp`.

3.99.2.5 `bool Ipopt::Ma86SolverInterface::IncreaseQuality ( )` `[virtual]`

Request to increase quality of solution for next solve.

The calling class asks linear solver to increase quality of solution for the next solve (e.g. increase pivot tolerance). Returns false, if this is not possible (e.g. maximal pivot tolerance already used.)

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.99.2.6 `bool Ipopt::Ma86SolverInterface::ProvidesInertia ( ) const` `[inline]`, `[virtual]`

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 225 of file `IpMa86SolverInterface.hpp`.

3.99.2.7 `bool Ipopt::Ma86SolverInterface::ProvidesDegeneracyDetection ( ) const` `[inline]`, `[virtual]`

Query whether the indices of linearly dependent rows/columns can be determined by this linear solver.

Reimplemented from [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 244 of file `IpMa86SolverInterface.hpp`.

3.99.2.8 `ESymSolverStatus Ipopt::Ma86SolverInterface::DetermineDependentRows ( const Index * ia, const Index * ja, std::list< Index > & c.deps )` `[inline]`, `[virtual]`

This method determines the list of row indices of the linearly dependent rows.

Reimplemented from [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 250 of file IpMa86SolverInterface.hpp.

The documentation for this class was generated from the following file:

- IpMa86SolverInterface.hpp

3.100 **ma97_control_d Struct Reference**

3.100.1 Detailed Description

Definition at line 35 of file hsl_ma97d.h.

The documentation for this struct was generated from the following file:

- hsl_ma97d.h

3.101 **ma97_info Struct Reference**

3.101.1 Detailed Description

Definition at line 66 of file hsl_ma97d.h.

The documentation for this struct was generated from the following file:


- hsl_ma97d.h

3.102 **Ipopt::Ma97SolverInterface Class Reference**

Base class for interfaces to symmetric indefinite linear solvers for sparse matrices.

```
#include <IpMa97SolverInterface.hpp>
```

Inheritance diagram for Ipopt::Ma97SolverInterface:

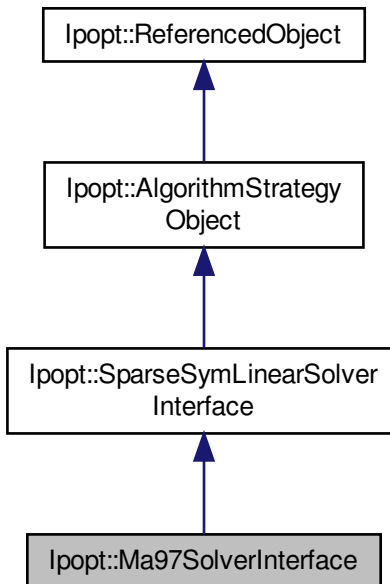

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)

Methods for requesting solution of the linear system.

- ESymSolverStatus [InitializeStructure](#) (Index dim, Index nonzeros, const Index *ia, const Index *ja)
Method for initializing internal structures.
- double * [GetValuesArrayPtr](#) ()
Method returning an internal array into which the nonzero elements (in the same order as ja) will be stored by the calling routine before a call to MultiSolve with a new_matrix=true (or after a return of MultiSolve with SYMSOLV_CALL_AGA-IN).
- ESymSolverStatus [MultiSolve](#) (bool new_matrix, const Index *ia, const Index *ja, Index nrhs, double *rhs_vals, bool check_NegEvals, Index numberOfNegEvals)
Solve operation for multiple right hand sides.
- Index [NumberOfNegEvals](#) () const
Number of negative eigenvalues detected during last factorization.
- bool [IncreaseQuality](#) ()
Request to increase quality of solution for next solve.
- bool [ProvidesInertia](#) () const
Query whether inertia is computed by linear solver.
- [EMatrixFormat](#) [MatrixFormat](#) () const
Query of requested matrix type that the linear solver understands.

Methods related to the detection of linearly dependent

rows in a matrix

- bool [ProvidesDegeneracyDetection](#) () const
Query whether the indices of linearly dependent rows/columns can be determined by this linear solver.
- ESymSolverStatus [DetermineDependentRows](#) (const Index *ia, const Index *ja, std::list< Index > &c_deps)
This method determines the list of row indices of the linearly dependent rows.
- static int [ScaleNameToNum](#) (const std::string &name)
converts a scalign optoin name to its ma97 option number

Additional Inherited Members

3.102.1 Detailed Description

Base class for interfaces to symmetric indefinite linear solvers for sparse matrices.

This defines the general interface to linear solvers for sparse symmetric indefinite matrices. The matrices can be provided either in "triplet format" (like for Harwell's MA27 solver), or in compressed sparse row (CSR) format for the lower triangular part of the symmetric matrix.

The solver should be able to compute the interia of the matrix, or more specifically, the number of negative eigenvalues in the factorized matrix.

This interface is used by the calling objective in the following way:

1. The InitializeImpl method is called at the very beginning (for every optimization run), which allows the linear solver object to retrieve options given in the [OptionsList](#) (such as pivot tolerances etc). At this point, some internal data can also be initialized.
1. The calling class calls MatrixFormat to find out which matrix representation the linear solver requires. The possible options are Triplet_Format, as well as CSR_Format_0_Offset and CSR_Format_1_Offset. The difference between the last two is that for CSR_Format_0_Offset the counting of the element position in the ia and ja arrays starts are 0 (C-style numbering), whereas for the other one it starts at 1 (Fortran-style numbering).
1. After this, the InitializeStructure method is called (once). Here, the structure of the matrix is provided. If the linear solver requires a symbolic preprocessing phase that can be done without knowledge of the matrix element values, it can be done here.
1. The calling class will request an array for storing the actual values for a matrix using the GetValuesArrayPtr method. This array must be at least as large as the number of nonzeros in the matrix (as given to this class by the InitializeStructure method call). After a call of this method, the calling class will fill this array with the actual values of the matrix.
1. Every time lateron, when actual solves of a linear system is requested, the calling class will call the MultiSolve to request the solve, possibly for mulitple right-hand sides. The flag new_matrix then indicates if the values of the matrix have changed and if a factorization is required, or if an old factorization can be used to do the solve.

Note that the GetValuesArrayPtr method will be called before every call of MultiSolve with new_matrix=true, or before a renewed call of MultiSolve if the most previous return value was SYMSOLV_CALL_AGAIN.

1. The calling class might request with NumberOfNegEVals the number of the negative eigenvalues for the original matrix that were detected during the most recently performed factorization.

1. The calling class might ask the linear solver to increase the quality of the solution. For example, if the linear solver uses a pivot tolerance, a larger value should be used for the next solve (which might require a refactorization).
1. Finally, when the destructor is called, the internal storage, also in the linear solver, should be released.

Note, if the matrix is given in triplet format, entries might be listed multiple times, in which case the corresponding elements have to be added.

A note for warm starts: If the option "warm_start_same_structure" is specified with "yes", the algorithm assumes that a problem with the same sparsity structure is solved for a repeated time. In that case, the linear solver might reuse information from the previous optimization. See [Ma27TSolverInterface](#) for an example.

Definition at line 104 of file IpMa97SolverInterface.hpp.

3.102.2 Member Function Documentation

3.102.2.1 ESymSolverStatus Ipopt::Ma97SolverInterface::InitializeStructure (Index *dim*, Index *nonzeros*, const Index * *ia*, const Index * *ja*) [virtual]

Method for initializing internal structures.

Here, *ndim* gives the number of rows and columns of the matrix, *nonzeros* give the number of nonzero elements, and *ia* and *ja* give the positions of the nonzero elements, given in the matrix format determined by `MatrixFormat`.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.102.2.2 double* Ipopt::Ma97SolverInterface::GetValuesArrayPtr () [inline], [virtual]

Method returning an internal array into which the nonzero elements (in the same order as *ja*) will be stored by the calling routine before a call to `MultiSolve` with a new `_matrix=true` (or after a return of `MultiSolve` with `SYMSOLV_CALL_AGAIN`).

The returned array must have space for at least nonzero elements.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 181 of file IpMa97SolverInterface.hpp.

3.102.2.3 ESymSolverStatus Ipopt::Ma97SolverInterface::MultiSolve (bool *new_matrix*, const Index * *ia*, const Index * *ja*, Index *nrhs*, double * *rhs_vals*, bool *check_NegEvals*, Index *numberOfNegEvals*) [virtual]

Solve operation for multiple right hand sides.

Solves the linear system $A * x = b$ with multiple right hand sides, where *A* is the symmetric indefinite matrix. Here, *ia* and *ja* give the positions of the values (in the required matrix data format). The actual values of the matrix will have been given to this object by copying them into the array provided by `GetValuesArrayPtr`. *ia* and *ja* are identical to the ones given to `InitializeStructure`. The flag *new_matrix* is set to true, if the values of the matrix has changed, and a refactorization is required.

The return code is `SYMSOLV_SUCCESS` if the factorization and solves were successful, `SYMSOLV_SINGULAR` if the linear system is singular, and `SYMSOLV_WRONG_INERTIA` if *check_NegEvals* is true and the number of negative eigenvalues in the matrix does not match *numberOfNegEvals*. If `SYMSOLV_CALL_AGAIN` is returned, then the calling function will request the pointer for the array for storing a again (with `GetValuesPtr`), write the values of the nonzero elements into it, and call this `MultiSolve` method again with the same right-hand sides. (This can be done, for example, if the linear solver realized it does not have sufficient memory and needs to redo the factorization; e.g., for MA27.)

The number of right-hand sides is given by *nrhs*, the values of the right-hand sides are given in *rhs_vals* (one full right-hand side stored immediately after the other), and solutions are to be returned in the same array.

check_NegEvals will not be chosen true, if [ProvidesInertia\(\)](#) returns false.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.102.2.4 Index Ipopt::Ma97SolverInterface::NumberOfNegEVals () const [inline],[virtual]

Number of negative eigenvalues detected during last factorization.

Returns the number of negative eigenvalues of the most recent factorized matrix. This must not be called if the linear solver does not compute this quantities (see ProvidesInertia).

Implements [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 232 of file IpMa97SolverInterface.hpp.

3.102.2.5 bool Ipopt::Ma97SolverInterface::IncreaseQuality () [virtual]

Request to increase quality of solution for next solve.

The calling class asks linear solver to increase quality of solution for the next solve (e.g. increase pivot tolerance). Returns false, if this is not possible (e.g. maximal pivot tolerance already used.)

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.102.2.6 bool Ipopt::Ma97SolverInterface::ProvidesInertia () const [inline],[virtual]

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 251 of file IpMa97SolverInterface.hpp.

3.102.2.7 bool Ipopt::Ma97SolverInterface::ProvidesDegeneracyDetection () const [inline],[virtual]

Query whether the indices of linearly dependent rows/columns can be determined by this linear solver.

Reimplemented from [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 270 of file IpMa97SolverInterface.hpp.

3.102.2.8 ESymSolverStatus Ipopt::Ma97SolverInterface::DetermineDependentRows (const Index * ia, const Index * ja, std::list< Index > & c_deps) [inline],[virtual]

This method determines the list of row indices of the linearly dependent rows.

Reimplemented from [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 276 of file IpMa97SolverInterface.hpp.

The documentation for this class was generated from the following file:


- IpMa97SolverInterface.hpp

3.103 Ipopt::Matrix Class Reference

[Matrix](#) Base Class.

```
#include <IpMatrix.hpp>
```

Inheritance diagram for Ipopt::Matrix:

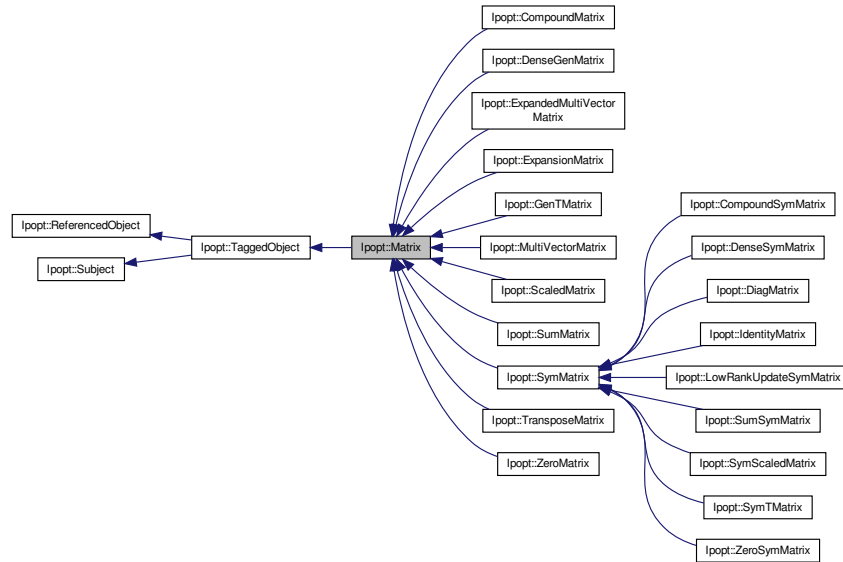

Public Member Functions

- bool [IsValidNumbers](#) () const
Method for determining if all stored numbers are valid (i.e., no Inf or Nan).
- [SmartPtr](#)< const [MatrixSpace](#) > [OwnerSpace](#) () const
Return the owner [MatrixSpace](#).

Constructor/Destructor

- [Matrix](#) (const [MatrixSpace](#) *owner_space)
Constructor.
- virtual [~Matrix](#) ()
Destructor.

Operations of the Matrix on a Vector

- void [MultVector](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix-vector multiply.
- void [TransMultVector](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix(transpose) vector multiply.

Methods for specialized operations. A prototype

implementation is provided, but for efficient implementation those should be specially implemented.

- void [AddMSinvZ](#) (Number alpha, const [Vector](#) &S, const [Vector](#) &Z, [Vector](#) &X) const
 $X = X + \alpha * (Matrix\ S^{-1}) Z.$
- void [SinvBlrmZMTdBr](#) (Number alpha, const [Vector](#) &S, const [Vector](#) &R, const [Vector](#) &Z, const [Vector](#) &D, [Vector](#) &X) const

$$X = S^{\{-1\}} (r + \alpha * Z * M^{\wedge} Td).$$

Information about the size of the matrix

- Index [NRows](#) () const
Number of rows.
- Index [NCols](#) () const
Number of columns.

Norms of the individual rows and columns

- void [ComputeRowAMax](#) ([Vector](#) &rows_norms, bool init=true) const
Compute the max-norm of the rows in the matrix.
- void [ComputeColAMax](#) ([Vector](#) &cols_norms, bool init=true) const
Compute the max-norm of the columns in the matrix.
- virtual void [Print](#) ([SmartPtr](#)< const [Journalist](#) > jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent=0, const std::string &prefix="") const
Print detailed information about the matrix.

Protected Member Functions

implementation methods (derived classes MUST

overload these pure virtual protected methods.

- virtual void [MultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const =0
Matrix-vector multiply.
- virtual void [TransMultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const =0
Matrix(transpose) vector multiply.
- virtual void [AddMSinvZImpl](#) (Number alpha, const [Vector](#) &S, const [Vector](#) &Z, [Vector](#) &X) const
 $X = X + \alpha * (Matrix\ S^{\{-1\}}\ Z).$
- virtual void [SinvBlrmZMTdBrlImpl](#) (Number alpha, const [Vector](#) &S, const [Vector](#) &R, const [Vector](#) &Z, const [Vector](#) &D, [Vector](#) &X) const
 $X = S^{\{-1\}} (r + \alpha * Z * M^{\wedge} Td).$
- virtual bool [HasValidNumbersImpl](#) () const
Method for determining if all stored numbers are valid (i.e., no Inf or Nan).
- virtual void [ComputeRowAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const =0
Compute the max-norm of the rows in the matrix.
- virtual void [ComputeColAMaxImpl](#) ([Vector](#) &cols_norms, bool init) const =0
Compute the max-norm of the columns in the matrix.
- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const =0
Print detailed information about the matrix.

Additional Inherited Members

3.103.1 Detailed Description

[Matrix](#) Base Class.

This is the base class for all derived matrix types. All Matrices, such as Jacobian and Hessian matrices, as well as possibly the iteration matrices needed for the step computation, are of this type.

Deriving from [Matrix](#): Overload the protected XXX_Impl method.

Definition at line 27 of file IpMatrix.hpp.

3.103.2 Constructor & Destructor Documentation

3.103.2.1 Ipopt::Matrix::Matrix (const MatrixSpace * owner_space) [inline]

Constructor.

It has to be given a pointer to the corresponding [MatrixSpace](#).

Definition at line 35 of file IpMatrix.hpp.

3.103.3 Member Function Documentation

3.103.3.1 void Ipopt::Matrix::MultVector (Number alpha, const Vector & x, Number beta, Vector & y) const [inline]

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$. Do not overload. Overload MultVectorImpl instead.

Definition at line 52 of file IpMatrix.hpp.

3.103.3.2 void Ipopt::Matrix::TransMultVector (Number alpha, const Vector & x, Number beta, Vector & y) const [inline]

Matrix(transpose) vector multiply.

Computes $y = \alpha * \text{Matrix}^T * x + \beta * y$. Do not overload. Overload TransMultVectorImpl instead.

Definition at line 62 of file IpMatrix.hpp.

3.103.3.3 void Ipopt::Matrix::AddMSinvZ (Number alpha, const Vector & S, const Vector & Z, Vector & X) const

$X = X + \alpha * (\text{Matrix } S^{-1} Z)$.

Should be implemented efficiently for the ExpansionMatrix

3.103.3.4 void Ipopt::Matrix::SinvBlrmZMTdBr (Number alpha, const Vector & S, const Vector & R, const Vector & Z, const Vector & D, Vector & X) const

$X = S^{-1} (r + \alpha * Z * M^T D)$.

Should be implemented efficiently for the ExpansionMatrix

3.103.3.5 bool Ipopt::Matrix::IsValidNumbers () const

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

3.103.3.6 void Ipopt::Matrix::ComputeRowAMax (Vector & rows_norms, bool init=true) const [inline]

Compute the max-norm of the rows in the matrix.

The result is stored in rows_norms. The vector is assumed to be initialized if init is false.

Definition at line 108 of file IpMatrix.hpp.

3.103.3.7 void Ipopt::Matrix::ComputeColAMax (Vector & cols_norms, bool init=true) const [inline]

Compute the max-norm of the columns in the matrix.

The result is stored in cols_norms. The vector is assumed to be initialized if init is false.

Definition at line 117 of file IpMatrix.hpp.

3.103.3.8 `virtual void Ipopt::Matrix::Print ( SmartPtr< const Journalist > jnlst, EJournalLevel level, EJournalCategory category, const std::string & name, Index indent = 0, const std::string & prefix = " " ) const` [virtual]

Print detailed information about the matrix.

Do not overload. Overload PrintImpl instead.

3.103.3.9 `virtual void Ipopt::Matrix::MultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const` [protected], [pure virtual]

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implemented in [Ipopt::DenseGenMatrix](#), [Ipopt::MultiVectorMatrix](#), [Ipopt::SymTMatrix](#), [Ipopt::DenseSymMatrix](#), [Ipopt::LowRankUpdateSymMatrix](#), [Ipopt::GenTMatrix](#), [Ipopt::CompoundMatrix](#), [Ipopt::CompoundSymMatrix](#), [Ipopt::ExpandedMultiVectorMatrix](#), [Ipopt::ExpansionMatrix](#), [Ipopt::ScaledMatrix](#), [Ipopt::SymScaledMatrix](#), [Ipopt::IdentityMatrix](#), [Ipopt::SumSymMatrix](#), [Ipopt::SumMatrix](#), [Ipopt::DiagMatrix](#), [Ipopt::TransposeMatrix](#), [Ipopt::ZeroMatrix](#), and [Ipopt::ZeroSymMatrix](#).

3.103.3.10 `virtual void Ipopt::Matrix::TransMultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const` [protected], [pure virtual]

Matrix(transpose) vector multiply.

Computes $y = \alpha * \text{Matrix}^T * x + \beta * y$

Implemented in [Ipopt::DenseGenMatrix](#), [Ipopt::MultiVectorMatrix](#), [Ipopt::GenTMatrix](#), [Ipopt::CompoundMatrix](#), [Ipopt::ExpandedMultiVectorMatrix](#), [Ipopt::ExpansionMatrix](#), [Ipopt::ScaledMatrix](#), [Ipopt::SymMatrix](#), [Ipopt::TransposeMatrix](#), [Ipopt::SumMatrix](#), [Ipopt::ZeroMatrix](#), and [Ipopt::ZeroSymMatrix](#).

3.103.3.11 `virtual void Ipopt::Matrix::AddMSinvZImpl ( Number alpha, const Vector & S, const Vector & Z, Vector & X ) const` [protected], [virtual]

$X = X + \alpha * (\text{Matrix } S^{-1} Z)$.

Prototype for this specialize method is provided, but for efficient implementation it should be overloaded for the expansion matrix.

Reimplemented in [Ipopt::CompoundMatrix](#), [Ipopt::ScaledMatrix](#), [Ipopt::ExpansionMatrix](#), and [Ipopt::IdentityMatrix](#).

3.103.3.12 `virtual void Ipopt::Matrix::SinvBlrmZMTdBrlmImpl ( Number alpha, const Vector & S, const Vector & R, const Vector & Z, const Vector & D, Vector & X ) const` [protected], [virtual]

$X = S^{-1} (r + \alpha * Z * M^T D)$.

Should be implemented efficiently for the [ExpansionMatrix](#).

Reimplemented in [Ipopt::CompoundMatrix](#), [Ipopt::ScaledMatrix](#), and [Ipopt::ExpansionMatrix](#).

3.103.3.13 `virtual bool Ipopt::Matrix::IsValidNumbersImpl ( ) const` [inline], [protected], [virtual]

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

A default implementation always returning true is provided, but if possible it should be implemented.

Reimplemented in [Ipopt::DenseGenMatrix](#), [Ipopt::MultiVectorMatrix](#), [Ipopt::SymTMatrix](#), [Ipopt::CompoundMatrix](#), [Ipopt::DenseSymMatrix](#), [Ipopt::LowRankUpdateSymMatrix](#), [Ipopt::GenTMatrix](#), [Ipopt::CompoundSymMatrix](#), [Ipopt::ExpandedMultiVectorMatrix](#), [Ipopt::ScaledMatrix](#), [Ipopt::SymScaledMatrix](#), [Ipopt::TransposeMatrix](#), [Ipopt::IdentityMatrix](#), [Ipopt::SumMatrix](#), [Ipopt::SumSymMatrix](#), and [Ipopt::DiagMatrix](#).

Definition at line 179 of file IpMatrix.hpp.

3.103.3.14 `virtual void Ipopt::Matrix::ComputeRowAMaxImpl ( Vector & rows_norms, bool init ) const` [protected],
[pure virtual]

Compute the max-norm of the rows in the matrix.

The result is stored in `rows_norms`. The vector is assumed to be initialized.

Implemented in [Ipopt::DenseGenMatrix](#), [Ipopt::MultiVectorMatrix](#), [Ipopt::SymTMatrix](#), [Ipopt::CompoundMatrix](#), [Ipopt::DenseSymMatrix](#), [Ipopt::LowRankUpdateSymMatrix](#), [Ipopt::GenTMatrix](#), [Ipopt::CompoundSymMatrix](#), [Ipopt::ExpandedMultiVectorMatrix](#), [Ipopt::ExpansionMatrix](#), [Ipopt::ScaledMatrix](#), [Ipopt::TransposeMatrix](#), [Ipopt::SymScaledMatrix](#), [Ipopt::IdentityMatrix](#), [Ipopt::SumMatrix](#), [Ipopt::SumSymMatrix](#), [Ipopt::DiagMatrix](#), [Ipopt::ZeroMatrix](#), and [Ipopt::ZeroSymMatrix](#).

3.103.3.15 `virtual void Ipopt::Matrix::ComputeColAMaxImpl ( Vector & cols_norms, bool init ) const` [protected], [pure virtual]

Compute the max-norm of the columns in the matrix.

The result is stored in `cols_norms`. The vector is assumed to be initialized.

Implemented in [Ipopt::DenseGenMatrix](#), [Ipopt::MultiVectorMatrix](#), [Ipopt::CompoundMatrix](#), [Ipopt::LowRankUpdateSymMatrix](#), [Ipopt::GenTMatrix](#), [Ipopt::ExpandedMultiVectorMatrix](#), [Ipopt::ExpansionMatrix](#), [Ipopt::TransposeMatrix](#), [Ipopt::ScaledMatrix](#), [Ipopt::SymMatrix](#), [Ipopt::SumMatrix](#), [Ipopt::SumSymMatrix](#), [Ipopt::ZeroMatrix](#), and [Ipopt::ZeroSymMatrix](#).

3.103.3.16 `virtual void Ipopt::Matrix::PrintImpl ( const Journalist & jnlst, EJournalLevel level, EJournalCategory category, const std::string & name, Index indent, const std::string & prefix ) const` [protected], [pure virtual]

Print detailed information about the matrix.

Implemented in [Ipopt::DenseGenMatrix](#), [Ipopt::MultiVectorMatrix](#), [Ipopt::SymTMatrix](#), [Ipopt::CompoundMatrix](#), [Ipopt::LowRankUpdateSymMatrix](#), [Ipopt::DenseSymMatrix](#), [Ipopt::GenTMatrix](#), [Ipopt::CompoundSymMatrix](#), [Ipopt::ExpandedMultiVectorMatrix](#), [Ipopt::ExpansionMatrix](#), [Ipopt::TransposeMatrix](#), [Ipopt::ScaledMatrix](#), [Ipopt::SymScaledMatrix](#), [Ipopt::IdentityMatrix](#), [Ipopt::SumMatrix](#), [Ipopt::SumSymMatrix](#), [Ipopt::DiagMatrix](#), [Ipopt::ZeroMatrix](#), and [Ipopt::ZeroSymMatrix](#).

The documentation for this class was generated from the following file:


- [IpMatrix.hpp](#)

3.104 Ipopt::MatrixSpace Class Reference

[MatrixSpace](#) base class, corresponding to the [Matrix](#) base class.

```
#include <IpMatrix.hpp>
```

Inheritance diagram for Ipopt::MatrixSpace:

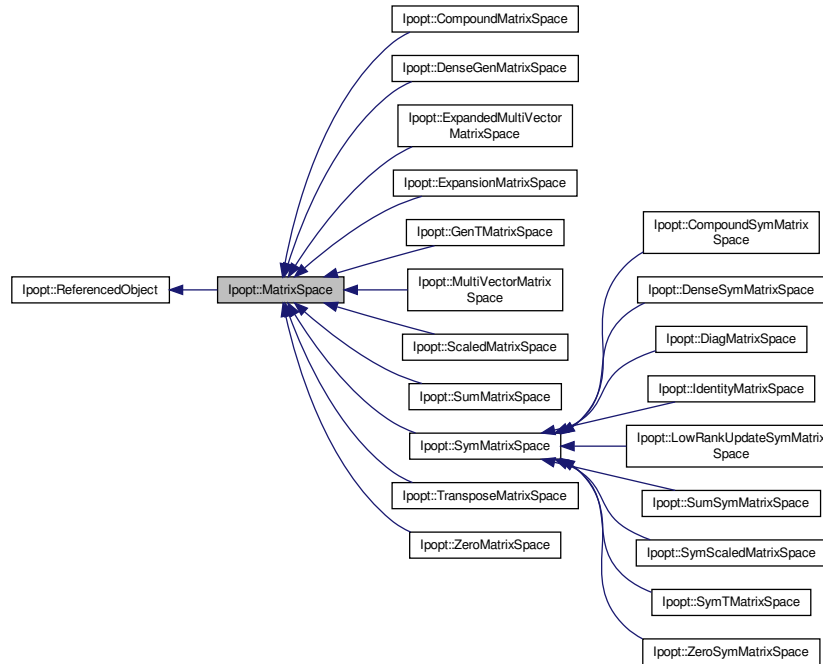

Public Member Functions

- virtual [Matrix](#) * [MakeNew](#) () const =0
Pure virtual method for creating a new [Matrix](#) of the corresponding type.
- Index [NRows](#) () const
Accessor function for the number of rows.
- Index [NCols](#) () const
Accessor function for the number of columns.
- bool [IsMatrixFromSpace](#) (const [Matrix](#) &matrix) const
Method to test if a given matrix belongs to a particular matrix space.

Constructors/Destructors

- [MatrixSpace](#) (Index nRows, Index nCols)
Constructor, given the number rows and columns of all matrices generated by this [MatrixSpace](#).
- virtual [~MatrixSpace](#) ()
Destructor.

3.104.1 Detailed Description

[MatrixSpace](#) base class, corresponding to the [Matrix](#) base class.

For each [Matrix](#) implementation, a corresponding [MatrixSpace](#) has to be implemented. A [MatrixSpace](#) is able to create new Matrices of a specific type. The [MatrixSpace](#) should also store information that is common to all Matrices of that type. For example, the dimensions of a [Matrix](#) is stored in the [MatrixSpace](#) base class.

Definition at line 239 of file IpMatrix.hpp.

3.104.2 Member Function Documentation

3.104.2.1 Index Ipopt::MatrixSpace::NRows () const [inline]

Accessor function for the number of rows.

Definition at line 264 of file IpMatrix.hpp.

3.104.2.2 Index Ipopt::MatrixSpace::NCols () const [inline]

Accessor function for the number of columns.

Definition at line 269 of file IpMatrix.hpp.

The documentation for this class was generated from the following file:


- IpMatrix.hpp

3.105 Ipopt::Mc19TSymScalingMethod Class Reference

Class for the method for computing scaling factors for symmetric matrices in triplet format, using MC19.

```
#include <IpMc19TSymScalingMethod.hpp>
```

Inheritance diagram for Ipopt::Mc19TSymScalingMethod:

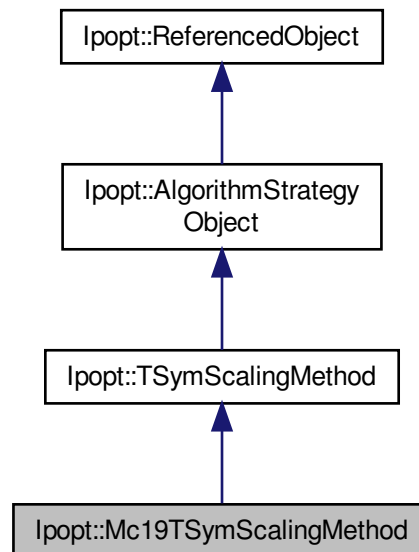

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [ComputeSymTScalingFactors](#) (Index n, Index nnz, const ipfint *airn, const ipfint *ajcn, const double *a, double *scaling_factors)
Method for computing the symmetric scaling factors, given the symmtric matrix in triplet (MA27) format.

Constructor/Destructor

- **Mc19TSymScalingMethod** ()
- virtual **~Mc19TSymScalingMethod** ()

Additional Inherited Members

3.105.1 Detailed Description

Class for the method for computing scaling factors for symmetric matrices in triplet format, using MC19.

Definition at line 21 of file IpMc19TSymScalingMethod.hpp.

3.105.2 Member Function Documentation

3.105.2.1 virtual bool Ipopt::Mc19TSymScalingMethod::ComputeSymTScalingFactors (Index *n*, Index *nnz*, const ipfint * *airn*, const ipfint * *ajcn*, const double * *a*, double * *scaling_factors*) [virtual]

Method for computing the symmetric scaling factors, given the symmtric matrix in triplet (MA27) format.

The documentation for this class was generated from the following file:

- IpMc19TSymScalingMethod.hpp

3.106 mc68_control Struct Reference

3.106.1 Detailed Description

Definition at line 27 of file hsl_mc68i.h.

The documentation for this struct was generated from the following file:

- hsl_mc68i.h

3.107 mc68_info Struct Reference

3.107.1 Detailed Description

Definition at line 48 of file hsl_mc68i.h.

The documentation for this struct was generated from the following file:


- hsl_mc68i.h

3.108 Ipopt::MinC_1NrmRestorationPhase Class Reference

Restoration Phase that minimizes the 1-norm of the constraint violation - using the interior point method (Ipopt).

```
#include <IpRestoMinC_1Nrm.hpp>
```

Inheritance diagram for Ipopt::MinC_1NrmRestorationPhase:

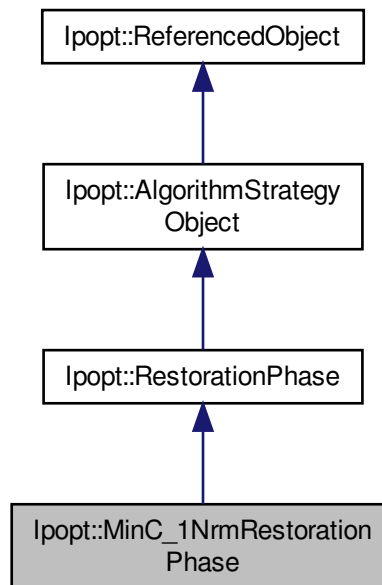

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
Overloaded from AlgorithmStrategy case class.

Constructors/Destructors

- [MinC_1NrmRestorationPhase](#) ([IpoptAlgorithm](#) &resto_alg, const [SmartPtr](#)< [EqMultiplierCalculator](#) > &eq_mult_calculator)
Constructor, taking strategy objects.
- virtual [~MinC_1NrmRestorationPhase](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Protected Member Functions

- virtual bool [PerformRestoration](#) ()
Overloaded method from [RestorationPhase](#).

3.108.1 Detailed Description

Restoration Phase that minimizes the 1-norm of the constraint violation - using the interior point method (Ipopt).

Definition at line 22 of file IpRestoMinC_1Nrm.hpp.

3.108.2 Constructor & Destructor Documentation

3.108.2.1 `Ipopt::MinC_1NrmRestorationPhase::MinC_1NrmRestorationPhase ( IpoptAlgorithm & resto_alg, const SmartPtr< EqMultiplierCalculator > & eq_mult_calculator )`

Constructor, taking strategy objects.

The resto_alg strategy object is the restoration phase Ipopt algorithm. The eq_mult_calculator is used to reinitialize the equality constraint multipliers after the restoration phase algorithm has finished - unless it is NULL, in which case the multipliers are set to 0.

3.108.3 Member Function Documentation

3.108.3.1 `virtual bool Ipopt::MinC_1NrmRestorationPhase::PerformRestoration ( )` `[protected]`, `[virtual]`

Overloaded method from [RestorationPhase](#).

Implements [Ipopt::RestorationPhase](#).

The documentation for this class was generated from the following file:


- IpRestoMinC_1Nrm.hpp

3.109 Ipopt::MonotoneMuUpdate Class Reference

Monotone Mu Update.

```
#include <IpMonotoneMuUpdate.hpp>
```

Inheritance diagram for Ipopt::MonotoneMuUpdate:

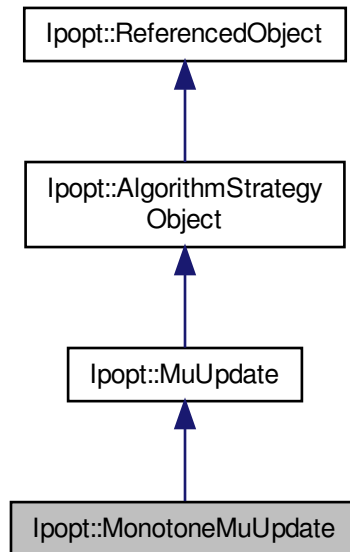

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
Initialize method - overloaded from [AlgorithmStrategyObject](#).
- virtual bool [UpdateBarrierParameter](#) ()
Method for determining the barrier parameter for the next iteration.

Constructors/Destructors

- [MonotoneMuUpdate](#) (const [SmartPtr](#)< [LineSearch](#) > &linesearch)
Default Constructor.
- virtual [~MonotoneMuUpdate](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) (const [SmartPtr](#)< [RegisteredOptions](#) > &roptions)
Methods for IpoptType.

Additional Inherited Members

3.109.1 Detailed Description

Monotone Mu Update.

This class implements the standard monotone mu update approach.

Definition at line 22 of file IpMonotoneMuUpdate.hpp.

3.109.2 Member Function Documentation

3.109.2.1 virtual bool Ipopt::MonotoneMuUpdate::UpdateBarrierParameter () [virtual]

Method for determining the barrier parameter for the next iteration.

When the optimality error for the current barrier parameter is less than a tolerance, the barrier parameter is reduced, and the Reset method of the [LineSearch](#) object linesearch is called.

Implements [Ipopt::MuUpdate](#).

The documentation for this class was generated from the following file:


- IpMonotoneMuUpdate.hpp

3.110 Ipopt::MultiVectorMatrix Class Reference

Class for Matrices with few columns that consists of Vectors.

```
#include <IpMultiVectorMatrix.hpp>
```

Inheritance diagram for Ipopt::MultiVectorMatrix:

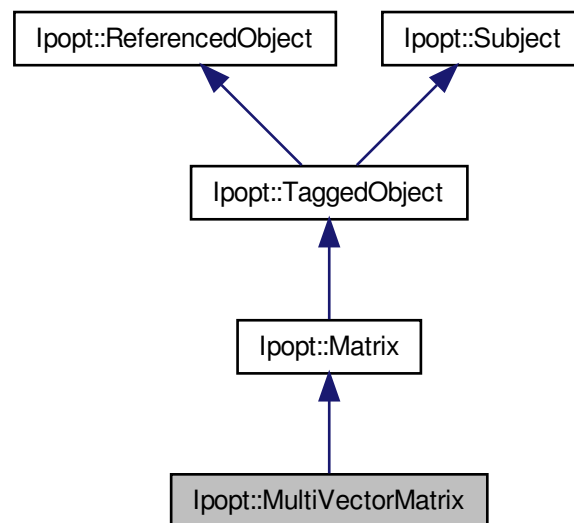

Public Member Functions

- [SmartPointer< MultiVectorMatrix > MakeNewMultiVectorMatrix \(\)](#) const

- Create a new [MultiVectorMatrix](#) from same [MatrixSpace](#).
- [SmartPtr](#)< const [Vector](#) > [GetVector](#) (Index i) const

Get a [Vector](#) in a particular column as a const [Vector](#).
- [SmartPtr](#)< [Vector](#) > [GetVectorNonConst](#) (Index i)

Get a [Vector](#) in a particular column as a non-const [Vector](#).
- void [ScaleRows](#) (const [Vector](#) &scal_vec)

Method for scaling the rows of the matrix, using the [ElementWiseMultiply](#) method for each column vector.
- void [ScaleColumns](#) (const [Vector](#) &scal_vec)

Method for scaling the columns of the matrix, using the [Scal](#) method for each column vector.
- void [AddOneMultiVectorMatrix](#) (Number a, const [MultiVectorMatrix](#) &mv1, Number c)

Adding another [MultiVectorMatrix](#), using the [AddOneVector](#) methods for the individual column vectors.
- void [AddRightMultMatrix](#) (Number a, const [MultiVectorMatrix](#) &U, const [Matrix](#) &C, Number b)

Multiplying a [Matrix](#) C (for now assumed to be a [DenseGenMatrix](#)) from the right to a [MultiVectorMatrix](#) U and adding the result to this [MultiVectorMatrix](#) V.
- void [FillWithNewVectors](#) ()

Method for initializing all Vectors with new (uninitialized) Vectors.
- void [LRMultVector](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const

Method for adding the low-rank update matrix corresponding to this matrix to a vector.
- [SmartPtr](#)< const [VectorSpace](#) > [ColVectorSpace](#) () const

[Vector](#) space for the columns.
- [SmartPtr](#)< const [MultiVectorMatrixSpace](#) > [MultiVectorMatrixOwnerSpace](#) () const

Return the [MultiVectorMatrixSpace](#).

Constructors / Destructors

- [MultiVectorMatrix](#) (const [MultiVectorMatrixSpace](#) *owner_space)

Constructor, taking the owner_space.
- [~MultiVectorMatrix](#) ()

Destructor.
- void [SetVector](#) (Index i, const [Vector](#) &vec)

Set a particular [Vector](#) at a given column position, replacing another vector if there has been one.

Protected Member Functions

Overloaded methods from Matrix base class

- virtual void [MultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const

[Matrix](#)-vector multiply.
- virtual void [TransMultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const

[Matrix](#)(transpose) vector multiply.
- virtual bool [HasValidNumbersImpl](#) () const

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).
- virtual void [ComputeRowAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const

Compute the max-norm of the rows in the matrix.
- virtual void [ComputeColAMaxImpl](#) ([Vector](#) &cols_norms, bool init) const

Compute the max-norm of the columns in the matrix.
- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const

Print detailed information about the matrix.

Additional Inherited Members

3.110.1 Detailed Description

Class for Matrices with few columns that consists of Vectors.

Those matrices are for example useful in the implementation of limited memory quasi-Newton methods.

Definition at line 25 of file IpMultiVectorMatrix.hpp.

3.110.2 Member Function Documentation

3.110.2.1 void Ipopt::MultiVectorMatrix::SetVector (Index *i*, const Vector & *vec*)

Set a particular Vector at a given column position, replacing another vector if there has been one.

Depending on whether the Vector is const or not, it is stored in the const or non-const internal column.

3.110.2.2 SmartPtr<Vector> Ipopt::MultiVectorMatrix::GetVectorNonConst (Index *i*) [inline]

Get a Vector in a particular column as a non-const Vector.

This is fail if the column has currently only a non-const Vector stored.

Definition at line 64 of file IpMultiVectorMatrix.hpp.

3.110.2.3 void Ipopt::MultiVectorMatrix::ScaleRows (const Vector & *scal_vec*)

Method for scaling the rows of the matrix, using the ElementWiseMultiply method for each column vector.

3.110.2.4 void Ipopt::MultiVectorMatrix::ScaleColumns (const Vector & *scal_vec*)

Method for scaling the columns of the matrix, using the Scal method for each column vector.

3.110.2.5 void Ipopt::MultiVectorMatrix::AddRightMultMatrix (Number *a*, const MultiVectorMatrix & *U*, const Matrix & *C*, Number *b*)

Multiplying a Matrix *C* (for now assumed to be a DenseGenMatrix) from the right to a MultiVectorMatrix *U* and adding the result to this MultiVectorMatrix *V*.

$$V = a * U * C + b * V.$$

3.110.2.6 void Ipopt::MultiVectorMatrix::FillWithNewVectors ()

Method for initializing all Vectors with new (uninitialized) Vectors.

3.110.2.7 void Ipopt::MultiVectorMatrix::LRMultVector (Number *alpha*, const Vector & *x*, Number *beta*, Vector & *y*) const

Method for adding the low-rank update matrix corresponding to this matrix to a vector.

If *V* is this MultiVectorMatrix, the operation is $y = \text{beta} * y + \text{alpha} * V * V^T * x$.

3.110.2.8 virtual void Ipopt::MultiVectorMatrix::MultVectorImpl (Number *alpha*, const Vector & *x*, Number *beta*, Vector & *y*) const [protected], [virtual]

Matrix-vector multiply.

Computes $y = \text{alpha} * \text{Matrix} * x + \text{beta} * y$

Implements Ipopt::Matrix.

3.110.2.9 `virtual void Ipopt::MultiVectorMatrix::TransMultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const` [protected], [virtual]

Matrix(transpose) vector multiply.

Computes $y = \alpha * \text{Matrix}^T * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.110.2.10 `virtual bool Ipopt::MultiVectorMatrix::IsValidNumbersImpl ( ) const` [protected], [virtual]

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Reimplemented from [Ipopt::Matrix](#).

3.110.2.11 `virtual void Ipopt::MultiVectorMatrix::ComputeRowAMaxImpl ( Vector & rows_norms, bool init ) const` [protected], [virtual]

Compute the max-norm of the rows in the matrix.

The result is stored in *rows_norms*. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.110.2.12 `virtual void Ipopt::MultiVectorMatrix::ComputeColAMaxImpl ( Vector & cols_norms, bool init ) const` [protected], [virtual]

Compute the max-norm of the columns in the matrix.

The result is stored in *cols_norms*. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.110.2.13 `virtual void Ipopt::MultiVectorMatrix::PrintImpl ( const Journalist & jnlst, EJournalLevel level, EJournalCategory category, const std::string & name, Index indent, const std::string & prefix ) const` [protected], [virtual]

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

The documentation for this class was generated from the following file:


- IpMultiVectorMatrix.hpp

3.111 Ipopt::MultiVectorMatrixSpace Class Reference

This is the matrix space for [MultiVectorMatrix](#).

```
#include <IpMultiVectorMatrix.hpp>
```

Inheritance diagram for Ipopt::MultiVectorMatrixSpace:

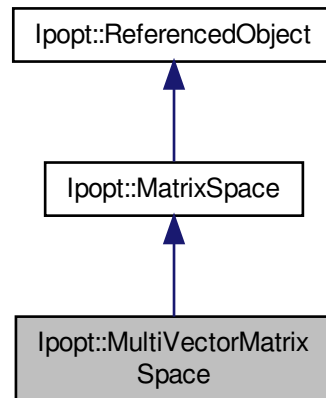

Public Member Functions

- [MultiVectorMatrix](#) * [MakeNewMultiVectorMatrix](#) () const
Method for creating a new matrix of this specific type.
- virtual [Matrix](#) * [MakeNew](#) () const
Overloaded MakeNew method for the [MatrixSpace](#) base class.
- [SmartPtr](#)< const [VectorSpace](#) > [ColVectorSpace](#) () const
Accessor method for the [VectorSpace](#) for the columns.

Constructors / Destructors

- [MultiVectorMatrixSpace](#) (Index ncols, const [VectorSpace](#) &vec_space)
Constructor, given the number of columns (i.e., Vectors to be stored) and given the [VectorSpace](#) for the Vectors.
- [~MultiVectorMatrixSpace](#) ()
Destructor.

3.111.1 Detailed Description

This is the matrix space for [MultiVectorMatrix](#).

Definition at line 184 of file IpMultiVectorMatrix.hpp.

3.111.2 Member Function Documentation

3.111.2.1 [MultiVectorMatrix](#)* Ipopt::MultiVectorMatrixSpace::MakeNewMultiVectorMatrix () const [inline]

Method for creating a new matrix of this specific type.

Definition at line 201 of file IpMultiVectorMatrix.hpp.

The documentation for this class was generated from the following file:


- IpMultiVectorMatrix.hpp

3.112 Ipopt::MumpsSolverInterface Class Reference

Interface to the linear solver Mumps, derived from [SparseSymLinearSolverInterface](#).

```
#include <IpMumpsSolverInterface.hpp>
```

Inheritance diagram for Ipopt::MumpsSolverInterface:

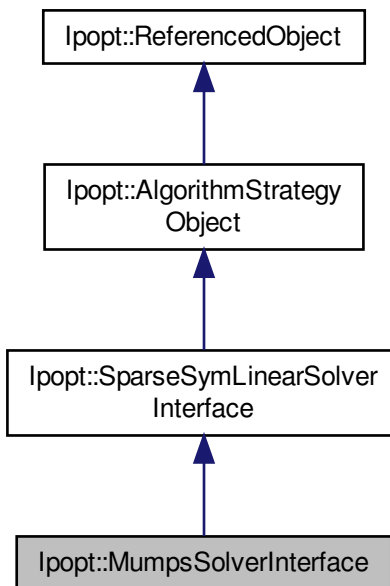

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [ProvidesDegeneracyDetection](#) () const
Query whether the indices of linearly dependent rows/columns can be determined by this linear solver.
- virtual ESymSolverStatus [DetermineDependentRows](#) (const Index *ia, const Index *ja, std::list< Index > &c_deps)
This method determines the list of row indices of the linearly dependent rows.

Constructor/Destructor

- [MumpsSolverInterface](#) ()
Constructor.
- virtual [~MumpsSolverInterface](#) ()
Destructor.

Methods for requesting solution of the linear system.

- virtual ESymSolverStatus [InitializeStructure](#) (Index dim, Index nonzeros, const Index *airn, const Index *ajcn)
Method for initializing internal stuctures.
- virtual double * [GetValuesArrayPtr](#) ()
Method returning an internal array into which the nonzero elements (in the same order as airn and ajcn) are to be stored by the calling routine before a call to MultiSolve with a new_matrix=true.
- virtual ESymSolverStatus [MultiSolve](#) (bool new_matrix, const Index *airn, const Index *ajcn, Index nrhs, double *rhs_vals, bool check_NegEVals, Index numberOfNegEVals)
Solve operation for multiple right hand sides.
- virtual Index [NumberOfNegEVals](#) () const
Number of negative eigenvalues detected during last factorization.
- virtual bool [IncreaseQuality](#) ()
Request to increase quality of solution for next solve.
- virtual bool [ProvidesInertia](#) () const
Query whether inertia is computed by linear solver.
- [EMatrixFormat](#) [MatrixFormat](#) () const
Query of requested matrix type that the linear solver understands.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members**3.112.1 Detailed Description**

Interface to the linear solver Mumps, derived from [SparseSymLinearSolverInterface](#).

For details, see description of [SparseSymLinearSolverInterface](#) base class.

Definition at line 26 of file IpMumpsSolverInterface.hpp.

3.112.2 Member Function Documentation

3.112.2.1 virtual ESymSolverStatus Ipopt::MumpsSolverInterface::InitializeStructure (Index dim, Index nonzeros, const Index * airn, const Index * ajcn) [virtual]

Method for initializing internal stuctures.

Here, ndim gives the number of rows and columns of the matrix, nonzeros give the number of nonzero elements, and airn and ajcn give the positions of the nonzero elements.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.112.2.2 virtual double* Ipopt::MumpsSolverInterface::GetValuesArrayPtr () [virtual]

Method returning an internal array into which the nonzero elements (in the same order as airn and ajcn) are to be stored by the calling routine before a call to MultiSolve with a new_matrix=true.

The returned array must have space for at least nonzero elements.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.112.2.3 `virtual ESymSolverStatus Ipopt::MumpsSolverInterface::MultiSolve ( bool new_matrix, const Index * airn, const Index * ajcn, Index nrhs, double * rhs_vals, bool check_NegEVals, Index numberOfNegEVals ) [virtual]`

Solve operation for multiple right hand sides.

Overloaded from [SparseSymLinearSolverInterface](#).

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.112.2.4 `virtual Index Ipopt::MumpsSolverInterface::NumberOfNegEVals ( ) const [virtual]`

Number of negative eigenvalues detected during last factorization.

Returns the number of negative eigenvalues of the most recent factorized matrix. This must not be called if the linear solver does not compute this quantities (see ProvidesInertia).

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.112.2.5 `virtual bool Ipopt::MumpsSolverInterface::IncreaseQuality ( ) [virtual]`

Request to increase quality of solution for next solve.

Ask linear solver to increase quality of solution for the next solve (e.g. increase pivot tolerance). Returns false, if this is not possible (e.g. maximal pivot tolerance already used.)

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.112.2.6 `virtual bool Ipopt::MumpsSolverInterface::ProvidesInertia ( ) const [inline],[virtual]`

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 92 of file IpMumpsSolverInterface.hpp.

3.112.2.7 `virtual bool Ipopt::MumpsSolverInterface::ProvidesDegeneracyDetection ( ) const [virtual]`

Query whether the indices of linearly dependent rows/columns can be determined by this linear solver.

Reimplemented from [Ipopt::SparseSymLinearSolverInterface](#).

3.112.2.8 `virtual ESymSolverStatus Ipopt::MumpsSolverInterface::DetermineDependentRows ( const Index * ia, const Index * ja, std::list< Index > & c_deps ) [virtual]`

This method determines the list of row indices of the linearly dependent rows.

Reimplemented from [Ipopt::SparseSymLinearSolverInterface](#).

The documentation for this class was generated from the following file:


- IpMumpsSolverInterface.hpp

3.113 Ipopt::MuOracle Class Reference

Abstract Base Class for classes that are able to compute a suggested value of the barrier parameter that can be used as an oracle in the NonmontoneMuUpdate class.

```
#include <IpMuOracle.hpp>
```

Inheritance diagram for Ipopt::MuOracle:

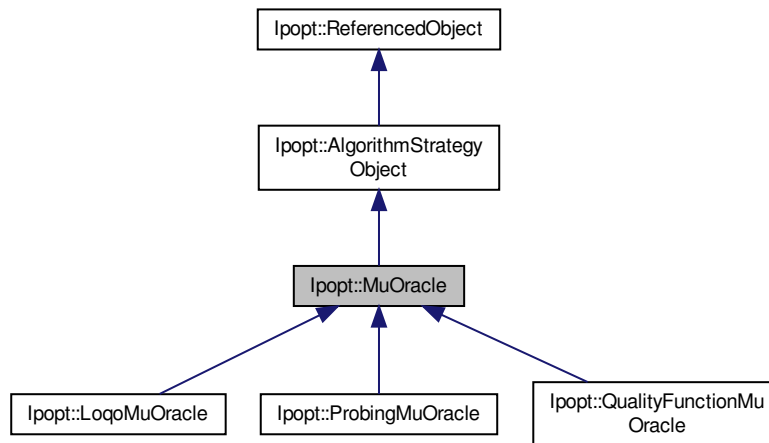

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
Initialize method - overloaded from [AlgorithmStrategyObject](#).
- virtual bool [CalculateMu](#) (Number mu_min, Number mu_max, Number &new_mu)=0
Method for computing the value of the barrier parameter that could be used in the current iteration.

Constructors/Destructors

- [MuOracle](#) ()
Default Constructor.
- virtual [~MuOracle](#) ()
Default destructor.

Additional Inherited Members

3.113.1 Detailed Description

Abstract Base Class for classes that are able to compute a suggested value of the barrier parameter that can be used as an oracle in the NonmontoneMuUpdate class.

Definition at line 21 of file IpMuOracle.hpp.

3.113.2 Member Function Documentation

3.113.2.1 virtual bool Ipopt::MuOracle::CalculateMu (Number *mu_min*, Number *mu_max*, Number & *new_mu*) [pure virtual]

Method for computing the value of the barrier parameter that could be used in the current iteration.

Here, `mu_min` and `mu_max` are the lower and upper bounds on acceptable values for the barrier parameter. The new value of `mu` is returned in `new_mu`, and the method returns false if a new value could not be determined (e.g., because the linear system could not be solved for a predictor step).

Implemented in [Ipopt::ProbingMuOracle](#), [Ipopt::QualityFunctionMuOracle](#), and [Ipopt::LoqoMuOracle](#).

The documentation for this class was generated from the following file:


- `IpMuOracle.hpp`

3.114 Ipopt::MuUpdate Class Reference

Abstract Base Class for classes that implement methods for computing the barrier and fraction-to-the-boundary rule parameter for the current iteration.

```
#include <IpMuUpdate.hpp>
```

Inheritance diagram for `Ipopt::MuUpdate`:

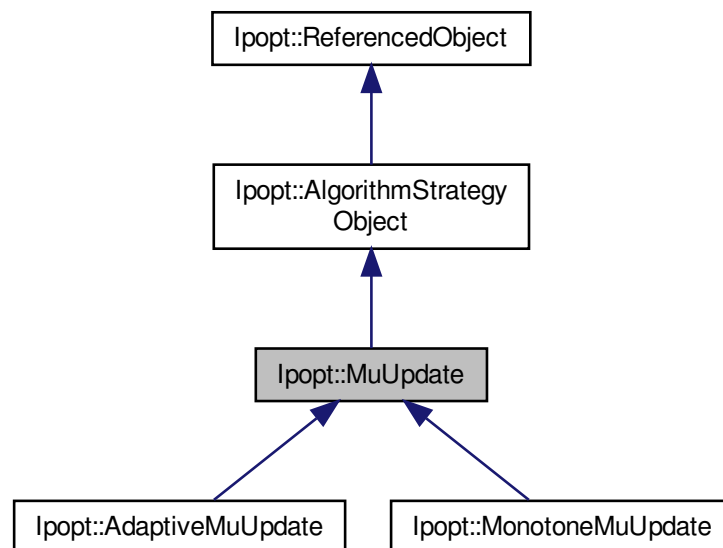

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
Initialize method - overloaded from [AlgorithmStrategyObject](#).
- virtual bool [UpdateBarrierParameter](#) ()=0
Method for determining the barrier parameter for the next iteration.

Constructors/Destructors

- [MuUpdate](#) ()

Default Constructor.

- virtual [~MuUpdate](#) ()

Default destructor.

Additional Inherited Members

3.114.1 Detailed Description

Abstract Base Class for classes that implement methods for computing the barrier and fraction-to-the-boundary rule parameter for the current iteration.

Definition at line 20 of file IpMuUpdate.hpp.

3.114.2 Member Function Documentation

3.114.2.1 virtual bool Ipopt::MuUpdate::UpdateBarrierParameter () [pure virtual]

Method for determining the barrier parameter for the next iteration.

A [LineSearch](#) object is passed, so that this method can call the Reset method in the [LineSearch](#) object, for example when then barrier parameter is changed. This method is also responsible for setting the fraction-to-the-boundary parameter tau. This method returns false if the update could not be performed and the algorithm should revert to an emergency fallback mechanism.

Implemented in [Ipopt::AdaptiveMuUpdate](#), and [Ipopt::MonotoneMuUpdate](#).

The documentation for this class was generated from the following file:


- IpMuUpdate.hpp

3.115 Ipopt::NLP Class Reference

Brief Class Description.

```
#include <IpNLP.hpp>
```

Inheritance diagram for Ipopt::NLP:

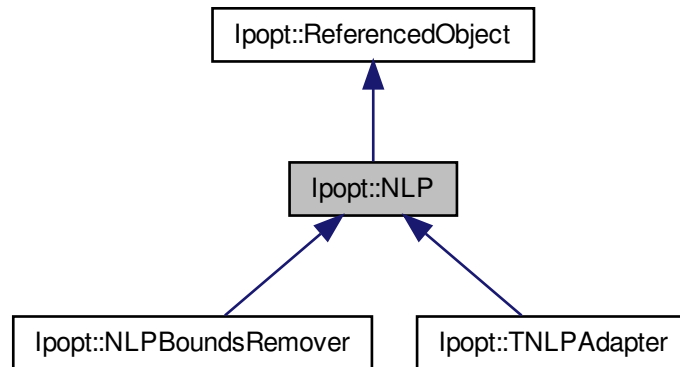

Public Member Functions

- virtual void [GetQuasiNewtonApproximationSpaces](#) (SmartPtr< [VectorSpace](#) > &approx_space, SmartPtr< [Matrix](#) > &P_approx)
Method for obtaining the subspace in which the limited-memory Hessian approximation should be done.

Constructors/Destructors

- [NLP](#) ()
Default constructor.
- virtual [~NLP](#) ()
Default destructor.
- [DECLARE_STD_EXCEPTION](#) (USER_SCALING_NOT_IMPLEMENTED)
Exceptions.

NLP Initialization (overload in derived classes).

- virtual bool [ProcessOptions](#) (const [OptionsList](#) &options, const std::string &prefix)
Overload if you want the chance to process options or parameters that may be specific to the [NLP](#).
- virtual bool [GetSpaces](#) (SmartPtr< const [VectorSpace](#) > &x_space, SmartPtr< const [VectorSpace](#) > &c_space, SmartPtr< const [VectorSpace](#) > &d_space, SmartPtr< const [VectorSpace](#) > &x_l_space, SmartPtr< const [MatrixSpace](#) > &px_l_space, SmartPtr< const [VectorSpace](#) > &x_u_space, SmartPtr< const [MatrixSpace](#) > &px_u_space, SmartPtr< const [VectorSpace](#) > &d_l_space, SmartPtr< const [MatrixSpace](#) > &pd_l_space, SmartPtr< const [VectorSpace](#) > &d_u_space, SmartPtr< const [MatrixSpace](#) > &pd_u_space, SmartPtr< const [MatrixSpace](#) > &Jac_c_space, SmartPtr< const [MatrixSpace](#) > &Jac_d_space, SmartPtr< const [SymMatrixSpace](#) > &Hess_lagrangian_space)=0
Method for creating the derived vector / matrix types.

- virtual bool [GetBoundsInformation](#) (const [Matrix](#) &Px_L, [Vector](#) &x_L, const [Matrix](#) &Px_U, [Vector](#) &x_U, const [Matrix](#) &Pd_L, [Vector](#) &d_L, const [Matrix](#) &Pd_U, [Vector](#) &d_U)=0
Method for obtaining the bounds information.
- virtual bool [GetStartingPoint](#) ([SmartPtr](#)< [Vector](#) > x, bool need_x, [SmartPtr](#)< [Vector](#) > y_c, bool need_y_c, [SmartPtr](#)< [Vector](#) > y_d, bool need_y_d, [SmartPtr](#)< [Vector](#) > z_L, bool need_z_L, [SmartPtr](#)< [Vector](#) > z_U, bool need_z_U)=0
Method for obtaining the starting point for all the iterates.
- virtual bool [GetWarmStartIterate](#) ([IteratesVector](#) &warm_start_iterate)
Method for obtaining an entire iterate as a warmstart point.

NLP evaluation routines (overload

in derived classes.

- virtual bool [Eval_f](#) (const [Vector](#) &x, Number &f)=0
- virtual bool [Eval_grad_f](#) (const [Vector](#) &x, [Vector](#) &g_f)=0
- virtual bool [Eval_c](#) (const [Vector](#) &x, [Vector](#) &c)=0
- virtual bool [Eval_jac_c](#) (const [Vector](#) &x, [Matrix](#) &jac_c)=0
- virtual bool [Eval_d](#) (const [Vector](#) &x, [Vector](#) &d)=0
- virtual bool [Eval_jac_d](#) (const [Vector](#) &x, [Matrix](#) &jac_d)=0
- virtual bool [Eval_h](#) (const [Vector](#) &x, Number obj_factor, const [Vector](#) &yc, const [Vector](#) &y_d, [SymMatrix](#) &h)=0

NLP solution routines. Have default dummy

implementations that can be overloaded.

- virtual void [FinalizeSolution](#) (SolverReturn status, const [Vector](#) &x, const [Vector](#) &z_L, const [Vector](#) &z_U, const [Vector](#) &c, const [Vector](#) &d, const [Vector](#) &y_c, const [Vector](#) &y_d, Number obj_value, const [IpoptData](#) *ip_data, [IpoptCalculatedQuantities](#) *ip_cq)
This method is called at the very end of the optimization.
- virtual bool [IntermediateCallBack](#) (AlgorithmMode mode, Index iter, Number obj_value, Number inf_pr, Number inf_du, Number mu, Number d_norm, Number regularization_size, Number alpha_du, Number alpha_pr, Index ls_trials, const [IpoptData](#) *ip_data, [IpoptCalculatedQuantities](#) *ip_cq)
This method is called once per iteration, after the iteration summary output has been printed.
- virtual void [GetScalingParameters](#) (const [SmartPtr](#)< const [VectorSpace](#) > x_space, const [SmartPtr](#)< const [VectorSpace](#) > c_space, const [SmartPtr](#)< const [VectorSpace](#) > d_space, Number &obj_scaling, [SmartPtr](#)< [Vector](#) > &x_scaling, [SmartPtr](#)< [Vector](#) > &c_scaling, [SmartPtr](#)< [Vector](#) > &d_scaling) const
Routines to get the scaling parameters.

3.115.1 Detailed Description

Brief Class Description.

Detailed Class Description.

Definition at line 31 of file IpNLP.hpp.

3.115.2 Member Function Documentation

3.115.2.1 `virtual bool Ipopt::NLP::GetSpaces (SmartPtr< const VectorSpace > & x_space, SmartPtr< const VectorSpace > & c_space, SmartPtr< const VectorSpace > & d_space, SmartPtr< const VectorSpace > & x_L_space, SmartPtr< const MatrixSpace > & px_L_space, SmartPtr< const VectorSpace > & x_u_space, SmartPtr< const MatrixSpace > & px_u_space, SmartPtr< const VectorSpace > & d_L_space, SmartPtr< const MatrixSpace > & pd_L_space, SmartPtr< const VectorSpace > & d_u_space, SmartPtr< const MatrixSpace > & pd_u_space, SmartPtr< const MatrixSpace > & Jac_c_space, SmartPtr< const MatrixSpace > & Jac_d_space, SmartPtr< const SymMatrixSpace > & Hess_lagrangian_space) [pure virtual]`

Method for creating the derived vector / matrix types.

The Hess_lagrangian_space pointer can be NULL if a quasi-Newton options is chosen.

Implemented in [Ipopt::TNLPAdapter](#), and [Ipopt::NLPBoundsRemover](#).

3.115.2.2 `virtual bool Ipopt::NLP::GetStartingPoint ( SmartPtr< Vector > x, bool need_x, SmartPtr< Vector > y_c, bool need_y_c, SmartPtr< Vector > y_d, bool need_y_d, SmartPtr< Vector > z_L, bool need_z_L, SmartPtr< Vector > z_U, bool need_z_U ) [pure virtual]`

Method for obtaining the starting point for all the iterates.

ToDo it might not make sense to ask for initial values for v_L and v_U?

Implemented in [Ipopt::TNLPAdapter](#), and [Ipopt::NLPBoundsRemover](#).

3.115.2.3 `virtual bool Ipopt::NLP::GetWarmStartIterate ( IteratesVector & warm_start_iterate ) [inline],[virtual]`

Method for obtaining an entire iterate as a warmstart point.

The incoming [IteratesVector](#) has to be filled. The default dummy implementation returns false.

Reimplemented in [Ipopt::TNLPAdapter](#), and [Ipopt::NLPBoundsRemover](#).

Definition at line 109 of file IpNLP.hpp.

3.115.2.4 `virtual void Ipopt::NLP::FinalizeSolution ( SolverReturn status, const Vector & x, const Vector & z_L, const Vector & z_U, const Vector & c, const Vector & d, const Vector & y_c, const Vector & y_d, Number obj_value, const IpoptData * ip_data, IpoptCalculatedQuantities * ip_cq ) [inline],[virtual]`

This method is called at the very end of the optimization.

It provides the final iterate to the user, so that it can be stored as the solution. The status flag indicates the outcome of the optimization, where SolverReturn is defined in [IpAlgTypes.hpp](#).

Reimplemented in [Ipopt::NLPBoundsRemover](#), and [Ipopt::TNLPAdapter](#).

Definition at line 145 of file IpNLP.hpp.

3.115.2.5 `virtual bool Ipopt::NLP::IntermediateCallBack (AlgorithmMode mode, Index iter, Number obj_value, Number inf_pr, Number inf_du, Number mu, Number d_norm, Number regularization_size, Number alpha_du, Number alpha_pr, Index ls_trials, const IpoptData * ip_data, IpoptCalculatedQuantities * ip_cq) [inline],[virtual]`

This method is called once per iteration, after the iteration summary output has been printed.

It provides the current information to the user to do with it anything she wants. It also allows the user to ask for a premature termination of the optimization by returning false, in which case Ipopt will terminate with a corresponding return status. The basic information provided in the argument list has the quantities values printed in the iteration summary line. If more information is required, a user can obtain it from the IpData and IpCalculatedQuantities objects. However, note that the provided quantities are all for the problem that Ipopt sees, i.e., the quantities might be scaled, fixed variables might be sorted out, etc. The status indicates things like whether the algorithm is in the restoration phase... In the restoration phase, the dual variables are probably not changing.

Reimplemented in [Ipopt::NLPBoundsRemover](#), and [Ipopt::TNLPAdapter](#).

Definition at line 170 of file IpNLP.hpp.

```
3.115.2.6 virtual void Ipopt::NLP::GetScalingParameters ( const SmartPtr< const VectorSpace > x_space, const SmartPtr<
const VectorSpace > c_space, const SmartPtr< const VectorSpace > d_space, Number & obj_scaling,
SmartPtr< Vector > & x_scaling, SmartPtr< Vector > & c_scaling, SmartPtr< Vector > & d_scaling ) const
[inline],[virtual]
```

Routines to get the scaling parameters.

These do not need to be overloaded unless the options are set for User scaling

Reimplemented in [Ipopt::NLPBoundsRemover](#), and [Ipopt::TNLPAdapter](#).

Definition at line 188 of file IpNLP.hpp.

```
3.115.2.7 virtual void Ipopt::NLP::GetQuasiNewtonApproximationSpaces ( SmartPtr< VectorSpace > & approx_space,
SmartPtr< Matrix > & P_approx ) [inline],[virtual]
```

Method for obtaining the subspace in which the limited-memory Hessian approximation should be done.

This is only called if the limited-memory Hessian approximation is chosen. Since the Hessian is zero in the space of all variables that appear in the problem functions only linearly, this allows the user to provide a [VectorSpace](#) for all nonlinear variables, and an [ExpansionMatrix](#) to lift from this [VectorSpace](#) to the [VectorSpace](#) of the primal variables x. If the returned values are NULL, it is assumed that the Hessian is to be approximated in the space of all x variables. The default instantiation of this method returns NULL, and a user only has to overwrite this method if the approximation is to be done only in a subspace.

Reimplemented in [Ipopt::NLPBoundsRemover](#), and [Ipopt::TNLPAdapter](#).

Definition at line 217 of file IpNLP.hpp.

The documentation for this class was generated from the following file:


- IpNLP.hpp

3.116 Ipopt::NLPBoundsRemover Class Reference

This is an adapter for an [NLP](#) that converts variable bound constraints to inequality constraints.

```
#include <IpNLPBoundsRemover.hpp>
```

Inheritance diagram for Ipopt::NLPBoundsRemover:

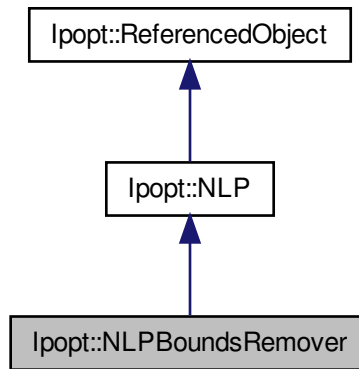

Public Member Functions

- virtual void [GetQuasiNewtonApproximationSpaces](#) ([SmartPtr](#)< [VectorSpace](#) > &approx_space, [SmartPtr](#)< [Matrix](#) > &P_approx)
Method for obtaining the subspace in which the limited-memory Hessian approximation should be done.
- [SmartPtr](#)< [NLP](#) > nlp ()
Accessor method to the original [NLP](#).

Constructors/Destructors

- [NLPBoundsRemover](#) ([NLP](#) &nlp, bool allow_twosided_inequalities=false)
The constructor is given the [NLP](#) of which the bounds are to be replaced by inequality constraints.
- virtual [~NLPBoundsRemover](#) ()
Default destructor.

NLP Initialization (overload in derived classes).

- virtual bool [ProcessOptions](#) (const [OptionsList](#) &options, const std::string &prefix)
Overload if you want the chance to process options or parameters that may be specific to the [NLP](#).
- virtual bool [GetSpaces](#) ([SmartPtr](#)< const [VectorSpace](#) > &x_space, [SmartPtr](#)< const [VectorSpace](#) > &c_space, [SmartPtr](#)< const [VectorSpace](#) > &d_space, [SmartPtr](#)< const [VectorSpace](#) > &x_l_space, [SmartPtr](#)< const [MatrixSpace](#) > &px_l_space, [SmartPtr](#)< const [VectorSpace](#) > &x_u_space, [SmartPtr](#)< const [MatrixSpace](#) > &px_u_space, [SmartPtr](#)< const [VectorSpace](#) > &d_l_space, [SmartPtr](#)< const [MatrixSpace](#) > &pd_l_space, [SmartPtr](#)< const [VectorSpace](#) > &d_u_space, [SmartPtr](#)< const [MatrixSpace](#) > &pd_u_space, [SmartPtr](#)< const [MatrixSpace](#) > &Jac_c_space, [SmartPtr](#)< const [MatrixSpace](#) > &Jac_d_space, [SmartPtr](#)< const [SymMatrixSpace](#) > &Hess_lagrangian_space)
Method for creating the derived vector / matrix types.
- virtual bool [GetBoundsInformation](#) (const [Matrix](#) &Px_L, [Vector](#) &x_L, const [Matrix](#) &Px_U, [Vector](#) &x_U, const [Matrix](#) &Pd_L, [Vector](#) &d_L, const [Matrix](#) &Pd_U, [Vector](#) &d_U)

Method for obtaining the bounds information.

- virtual bool **GetStartingPoint** (SmartPtr< Vector > x, bool need_x, SmartPtr< Vector > y_c, bool need_y_c, SmartPtr< Vector > y_d, bool need_y_d, SmartPtr< Vector > z_L, bool need_z_L, SmartPtr< Vector > z_U, bool need_z_U)

Method for obtaining the starting point for all the iterates.

- virtual bool **GetWarmStartIterate** (IteratesVector &warm_start_iterate)

Method for obtaining an entire iterate as a warmstart point.

NLP evaluation routines (overload

in derived classes.

- virtual bool **Eval_f** (const Vector &x, Number &f)
- virtual bool **Eval_grad_f** (const Vector &x, Vector &g_f)
- virtual bool **Eval_c** (const Vector &x, Vector &c)
- virtual bool **Eval_jac_c** (const Vector &x, Matrix &jac_c)
- virtual bool **Eval_d** (const Vector &x, Vector &d)
- virtual bool **Eval_jac_d** (const Vector &x, Matrix &jac_d)
- virtual bool **Eval_h** (const Vector &x, Number obj_factor, const Vector &yc, const Vector &y_d, SymMatrix &h)

NLP solution routines. Have default dummy

implementations that can be overloaded.

- virtual void **FinalizeSolution** (SolverReturn status, const Vector &x, const Vector &z_L, const Vector &z_U, const Vector &c, const Vector &d, const Vector &y_c, const Vector &y_d, Number obj_value, const IpoptData *ip_data, IpoptCalculatedQuantities *ip_cq)

This method is called at the very end of the optimization.

- virtual bool **IntermediateCallBack** (AlgorithmMode mode, Index iter, Number obj_value, Number inf_pr, Number inf_du, Number mu, Number d_norm, Number regularization_size, Number alpha_du, Number alpha_pr, Index ls_trials, const IpoptData *ip_data, IpoptCalculatedQuantities *ip_cq)

This method is called once per iteration, after the iteration summary output has been printed.

- virtual void **GetScalingParameters** (const SmartPtr< const VectorSpace > x_space, const SmartPtr< const VectorSpace > c_space, const SmartPtr< const VectorSpace > d_space, Number &obj_scaling, SmartPtr< Vector > &x_scaling, SmartPtr< Vector > &c_scaling, SmartPtr< Vector > &d_scaling) const

Routines to get the scaling parameters.

3.116.1 Detailed Description

This is an adapter for an **NLP** that converts variable bound constraints to inequality constraints.

This is necessary for the version of Ipopt that uses iterative linear solvers. At this point, none of the original inequality constraints is allowed to have both lower and upper bounds. The **NLP** visible to Ipopt via this adapter will not have any bounds on variables, but have equivalent inequality constraints.

Definition at line 24 of file IpNLPBoundsRemover.hpp.

3.116.2 Constructor & Destructor Documentation

3.116.2.1 Ipopt::NLPBoundsRemover::NLPBoundsRemover (NLP & nlp, bool allow_twosided_inequalities = false)

The constructor is given the **NLP** of which the bounds are to be replaced by inequality constraints.

3.116.3 Member Function Documentation

3.116.3.1 `virtual bool Ipopt::NLPBoundsRemover::GetSpaces (SmartPtr< const VectorSpace > & x_space, SmartPtr< const VectorSpace > & c_space, SmartPtr< const VectorSpace > & d_space, SmartPtr< const VectorSpace > & x_L_space, SmartPtr< const MatrixSpace > & px_L_space, SmartPtr< const VectorSpace > & x_U_space, SmartPtr< const MatrixSpace > & px_U_space, SmartPtr< const VectorSpace > & d_L_space, SmartPtr< const MatrixSpace > & pd_L_space, SmartPtr< const VectorSpace > & d_U_space, SmartPtr< const MatrixSpace > & pd_U_space, SmartPtr< const MatrixSpace > & Jac_c_space, SmartPtr< const MatrixSpace > & Jac_d_space, SmartPtr< const SymMatrixSpace > & Hess_lagrangian_space) [virtual]`

Method for creating the derived vector / matrix types.

The Hess_lagrangian_space pointer can be NULL if a quasi-Newton options is chosen.

Implements [Ipopt::NLP](#).

3.116.3.2 `virtual bool Ipopt::NLPBoundsRemover::GetStartingPoint ( SmartPtr< Vector > x, bool need_x, SmartPtr< Vector > y_c, bool need_y_c, SmartPtr< Vector > y_d, bool need_y_d, SmartPtr< Vector > z_L, bool need_z_L, SmartPtr< Vector > z_U, bool need_z_U ) [virtual]`

Method for obtaining the starting point for all the iterates.

ToDo it might not make sense to ask for initial values for v_L and v_U?

Implements [Ipopt::NLP](#).

3.116.3.3 `virtual bool Ipopt::NLPBoundsRemover::GetWarmStartIterate ( IteratesVector & warm_start_iterate ) [inline], [virtual]`

Method for obtaining an entire iterate as a warmstart point.

The incoming [IteratesVector](#) has to be filled. This has not yet been implemented for this adapter.

Reimplemented from [Ipopt::NLP](#).

Definition at line 94 of file `IpNLPBoundsRemover.hpp`.

3.116.3.4 `virtual void Ipopt::NLPBoundsRemover::FinalizeSolution (SolverReturn status, const Vector & x, const Vector & z_L, const Vector & z_U, const Vector & c, const Vector & d, const Vector & y_c, const Vector & y_d, Number obj_value, const IpoptData * ip_data, IpoptCalculatedQuantities * ip_cq) [virtual]`

This method is called at the very end of the optimization.

It provides the final iterate to the user, so that it can be stored as the solution. The status flag indicates the outcome of the optimization, where SolverReturn is defined in [IpAlgTypes.hpp](#).

Reimplemented from [Ipopt::NLP](#).

3.116.3.5 `virtual bool Ipopt::NLPBoundsRemover::IntermediateCallBack (AlgorithmMode mode, Index iter, Number obj_value, Number inf_pr, Number inf_du, Number mu, Number d_norm, Number regularization_size, Number alpha_du, Number alpha_pr, Index ls_trials, const IpoptData * ip_data, IpoptCalculatedQuantities * ip_cq) [inline], [virtual]`

This method is called once per iteration, after the iteration summary output has been printed.

It provides the current information to the user to do with it anything she wants. It also allows the user to ask for a premature termination of the optimization by returning false, in which case Ipopt will terminate with a corresponding return status. The basic information provided in the argument list has the quantities values printed in the iteration summary line. If more information is required, a user can obtain it from the IpData and IpCalculatedQuantities objects. However, note that the provided quantities are all for the problem that Ipopt sees, i.e., the quantities might be scaled,

fixed variables might be sorted out, etc. The status indicates things like whether the algorithm is in the restoration phase... In the restoration phase, the dual variables are probably not changing.

Reimplemented from [Ipopt::NLP](#).

Definition at line 166 of file IpNLPBoundsRemover.hpp.

```
3.116.3.6 virtual void Ipopt::NLPBoundsRemover::GetScalingParameters ( const SmartPtr< const VectorSpace > x_space,
    const SmartPtr< const VectorSpace > c_space, const SmartPtr< const VectorSpace > d_space, Number &
    obj_scaling, SmartPtr< Vector > & x_scaling, SmartPtr< Vector > & c_scaling, SmartPtr< Vector > &
    d_scaling ) const [virtual]
```

Routines to get the scaling parameters.

These do not need to be overloaded unless the options are set for User scaling

Reimplemented from [Ipopt::NLP](#).

```
3.116.3.7 virtual void Ipopt::NLPBoundsRemover::GetQuasiNewtonApproximationSpaces ( SmartPtr< VectorSpace > &
    approx_space, SmartPtr< Matrix > & P_approx ) [inline], [virtual]
```

Method for obtaining the subspace in which the limited-memory Hessian approximation should be done.

This is only called if the limited-memory Hessian approximation is chosen. Since the Hessian is zero in the space of all variables that appear in the problem functions only linearly, this allows the user to provide a [VectorSpace](#) for all nonlinear variables, and an [ExpansionMatrix](#) to lift from this [VectorSpace](#) to the [VectorSpace](#) of the primal variables x. If the returned values are NULL, it is assumed that the Hessian is to be approximated in the space of all x variables. The default instantiation of this method returns NULL, and a user only has to overwrite this method if the approximation is to be done only in a subspace.

Reimplemented from [Ipopt::NLP](#).

Definition at line 211 of file IpNLPBoundsRemover.hpp.

The documentation for this class was generated from the following file:


- IpNLPBoundsRemover.hpp

3.117 Ipopt::NLPScalingObject Class Reference

This is the abstract base class for problem scaling.

```
#include <IpNLPScaling.hpp>
```

Inheritance diagram for Ipopt::NLPScalingObject:

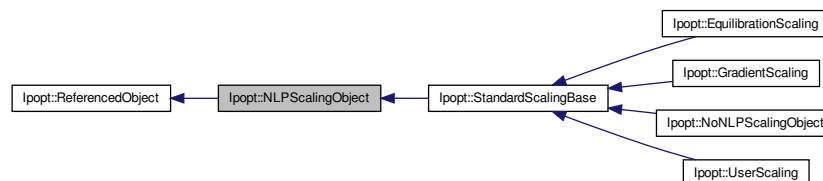

Public Member Functions

- bool [Initialize](#) (const [Journalist](#) &jnlst, const [OptionsList](#) &options, const std::string &prefix)
Method to initialize the options.
- virtual void [DetermineScaling](#) (const [SmartPtr](#)< const [VectorSpace](#) > x_space, const [SmartPtr](#)< const [VectorSpace](#) > c_space, const [SmartPtr](#)< const [VectorSpace](#) > d_space, const [SmartPtr](#)< const [MatrixSpace](#) > jac_c_space, const [SmartPtr](#)< const [MatrixSpace](#) > jac_d_space, const [SmartPtr](#)< const [SymMatrixSpace](#) > h_space, [SmartPtr](#)< const [MatrixSpace](#) > &new_jac_c_space, [SmartPtr](#)< const [MatrixSpace](#) > &new_jac_d_space, [SmartPtr](#)< const [SymMatrixSpace](#) > &new_h_space, const [Matrix](#) &Px_L, const [Vector](#) &x_L, const [Matrix](#) &Px_U, const [Vector](#) &x_U)=0
This method is called by the [IpoptNLP](#)'s at a convenient time to compute and/or read scaling factors.

Constructors/Destructors

- [NLPScalingObject](#) ()
- virtual [~NLPScalingObject](#) ()
Default destructor.
- virtual Number [apply_obj_scaling](#) (const Number &f)=0
Methods to map scaled and unscaled matrices.
- virtual Number [unapply_obj_scaling](#) (const Number &f)=0
Returns an obj-unscaled version of the given scalar.
- virtual [SmartPtr](#)< [Vector](#) > [apply_vector_scaling_x_NonConst](#) (const [SmartPtr](#)< const [Vector](#) > &v)=0
Returns an x-scaled version of the given vector.
- virtual [SmartPtr](#)< const [Vector](#) > [apply_vector_scaling_x](#) (const [SmartPtr](#)< const [Vector](#) > &v)=0
Returns an x-scaled version of the given vector.
- virtual [SmartPtr](#)< [Vector](#) > [unapply_vector_scaling_x_NonConst](#) (const [SmartPtr](#)< const [Vector](#) > &v)=0
Returns an x-unscaled version of the given vector.
- virtual [SmartPtr](#)< const [Vector](#) > [unapply_vector_scaling_x](#) (const [SmartPtr](#)< const [Vector](#) > &v)=0
Returns an x-unscaled version of the given vector.
- virtual [SmartPtr](#)< const [Vector](#) > [apply_vector_scaling_c](#) (const [SmartPtr](#)< const [Vector](#) > &v)=0
Returns an c-scaled version of the given vector.
- virtual [SmartPtr](#)< const [Vector](#) > [unapply_vector_scaling_c](#) (const [SmartPtr](#)< const [Vector](#) > &v)=0
Returns an c-unscaled version of the given vector.
- virtual [SmartPtr](#)< [Vector](#) > [apply_vector_scaling_c_NonConst](#) (const [SmartPtr](#)< const [Vector](#) > &v)=0
Returns an c-scaled version of the given vector.
- virtual [SmartPtr](#)< [Vector](#) > [unapply_vector_scaling_c_NonConst](#) (const [SmartPtr](#)< const [Vector](#) > &v)=0
Returns an c-unscaled version of the given vector.
- virtual [SmartPtr](#)< const [Vector](#) > [apply_vector_scaling_d](#) (const [SmartPtr](#)< const [Vector](#) > &v)=0
Returns an d-scaled version of the given vector.
- virtual [SmartPtr](#)< const [Vector](#) > [unapply_vector_scaling_d](#) (const [SmartPtr](#)< const [Vector](#) > &v)=0
Returns an d-unscaled version of the given vector.
- virtual [SmartPtr](#)< [Vector](#) > [apply_vector_scaling_d_NonConst](#) (const [SmartPtr](#)< const [Vector](#) > &v)=0
Returns an d-scaled version of the given vector.
- virtual [SmartPtr](#)< [Vector](#) > [unapply_vector_scaling_d_NonConst](#) (const [SmartPtr](#)< const [Vector](#) > &v)=0
Returns an d-unscaled version of the given vector.
- virtual [SmartPtr](#)< const [Matrix](#) > [apply_jac_c_scaling](#) ([SmartPtr](#)< const [Matrix](#) > matrix)=0
Returns a scaled version of the jacobian for c.
- virtual [SmartPtr](#)< const [Matrix](#) > [apply_jac_d_scaling](#) ([SmartPtr](#)< const [Matrix](#) > matrix)=0

Returns a scaled version of the jacobian for d . If the overloaded method does not create a new matrix, make sure to set the matrix ptr passed in to NULL.

- virtual `SmartPtr< const SymMatrix > apply_hessian_scaling (SmartPtr< const SymMatrix > matrix)=0`

Returns a scaled version of the hessian of the lagrangian. If the overloaded method does not create a new matrix, make sure to set the matrix ptr passed in to NULL.

- `SmartPtr< Vector > apply_vector_scaling_x_LU_NonConst (const Matrix &Px_LU, const SmartPtr< const Vector > &lu, const VectorSpace &x_space)`

Methods for scaling bounds - these wrap those above.

- `SmartPtr< const Vector > apply_vector_scaling_x_LU (const Matrix &Px_LU, const SmartPtr< const Vector > &lu, const VectorSpace &x_space)`

Returns an x -scaled vector in the x_L or x_U space.

- `SmartPtr< Vector > apply_vector_scaling_d_LU_NonConst (const Matrix &Pd_LU, const SmartPtr< const Vector > &lu, const VectorSpace &d_space)`

Returns an d -scaled vector in the d_L or d_U space.

- `SmartPtr< const Vector > apply_vector_scaling_d_LU (const Matrix &Pd_LU, const SmartPtr< const Vector > &lu, const VectorSpace &d_space)`

Returns an d -scaled vector in the d_L or d_U space.

- `SmartPtr< Vector > unapply_vector_scaling_d_LU_NonConst (const Matrix &Pd_LU, const SmartPtr< const Vector > &lu, const VectorSpace &d_space)`

Returns an d -unscaled vector in the d_L or d_U space.

- `SmartPtr< const Vector > unapply_vector_scaling_d_LU (const Matrix &Pd_LU, const SmartPtr< const Vector > &lu, const VectorSpace &d_space)`

Returns an d -unscaled vector in the d_L or d_U space.

- virtual `SmartPtr< Vector > apply_grad_obj_scaling_NonConst (const SmartPtr< const Vector > &v)`

Methods for scaling the gradient of the objective - wraps the virtual methods above.

- virtual `SmartPtr< const Vector > apply_grad_obj_scaling (const SmartPtr< const Vector > &v)`

Returns a grad_f scaled version ($d_f * D_x^{-1}$) of the given vector.

- virtual `SmartPtr< Vector > unapply_grad_obj_scaling_NonConst (const SmartPtr< const Vector > &v)`

Returns a grad_f unscaled version ($d_f * D_x^{-1}$) of the given vector.

- virtual `SmartPtr< const Vector > unapply_grad_obj_scaling (const SmartPtr< const Vector > &v)`

Returns a grad_f unscaled version ($d_f * D_x^{-1}$) of the given vector.

Methods for determining whether scaling for entities is

done

- virtual bool `have_x_scaling ()=0`

Returns true if the primal x variables are scaled.

- virtual bool `have_c_scaling ()=0`

Returns true if the equality constraints are scaled.

- virtual bool `have_d_scaling ()=0`

Returns true if the inequality constraints are scaled.

Protected Member Functions

- virtual bool `InitializeImpl (const OptionsList &options, const std::string &prefix)=0`

Implementation of the initialization method that has to be overloaded by for each derived class.

- const `Journalist & Jnlst () const`

Accessor method for the journalist.

3.117.1 Detailed Description

This is the abstract base class for problem scaling.

It is responsible for determining the scaling factors and mapping quantities in and out of scaled and unscaled versions

Definition at line 32 of file IpNLPScaling.hpp.

3.117.2 Member Function Documentation

3.117.2.1 `virtual Number Ipopt::NLPScalingObject::apply_obj_scaling ( const Number & f ) [pure virtual]`

Methods to map scaled and unscaled matrices.

Returns an obj-scaled version of the given scalar

Implemented in [Ipopt::StandardScalingBase](#).

3.117.2.2 `virtual SmartPtr<const Matrix> Ipopt::NLPScalingObject::apply_jac_c_scaling ( SmartPtr<const Matrix > matrix ) [pure virtual]`

Returns a scaled version of the jacobian for c.

If the overloaded method does not make a new matrix, make sure to set the matrix ptr passed in to NULL.

Implemented in [Ipopt::StandardScalingBase](#).

3.117.2.3 `SmartPtr<Vector> Ipopt::NLPScalingObject::apply_vector_scaling_x_LU.NonConst ( const Matrix & Px_LU, const SmartPtr<const Vector > & lu, const VectorSpace & x_space )`

Methods for scaling bounds - these wrap those above.

Returns an x-scaled vector in the x_L or x_U space

3.117.2.4 `virtual SmartPtr<Vector> Ipopt::NLPScalingObject::apply_grad_obj_scaling.NonConst ( const SmartPtr<const Vector > & v ) [virtual]`

Methods for scaling the gradient of the objective - wraps the virtual methods above.

Returns a grad_f scaled version ($d_f * D_x^{-1}$) of the given vector

3.117.2.5 `virtual bool Ipopt::NLPScalingObject::have_x_scaling ( ) [pure virtual]`

Returns true if the primal x variables are scaled.

Implemented in [Ipopt::StandardScalingBase](#).

3.117.2.6 `virtual bool Ipopt::NLPScalingObject::have_c_scaling ( ) [pure virtual]`

Returns true if the equality constraints are scaled.

Implemented in [Ipopt::StandardScalingBase](#).

3.117.2.7 `virtual bool Ipopt::NLPScalingObject::have_d_scaling ( ) [pure virtual]`

Returns true if the inequality constraints are scaled.

Implemented in [Ipopt::StandardScalingBase](#).

3.117.2.8 `virtual bool Ipopt::NLPScalingObject::InitializeImpl ( const OptionsList & options, const std::string & prefix )`
`[protected],[pure virtual]`

Implementation of the initialization method that has to be overloaded by for each derived class.

Implemented in [Ipopt::StandardScalingBase](#), [Ipopt::EquilibrationScaling](#), and [Ipopt::GradientScaling](#).

The documentation for this class was generated from the following file:


- IpNLPScaling.hpp

3.118 Ipopt::NoNLPScalingObject Class Reference

Class implementing the scaling object that doesn't to any scaling.

```
#include <IpNLPScaling.hpp>
```

Inheritance diagram for Ipopt::NoNLPScalingObject:

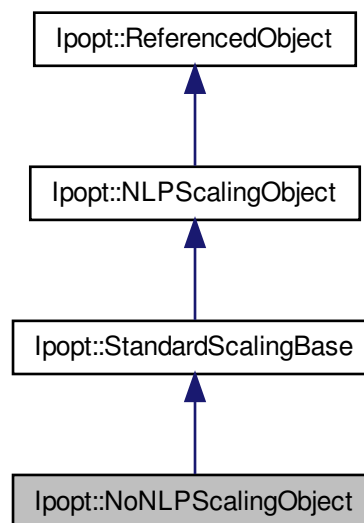

Public Member Functions

Constructors/Destructors

- **NoNLPScalingObject** ()
- virtual [~NoNLPScalingObject](#) ()
Default destructor.

Protected Member Functions

- virtual void [DetermineScalingParametersImpl](#) (const [SmartPtr](#)< const [VectorSpace](#) > x_space, const [SmartPtr](#)< const [VectorSpace](#) > c_space, const [SmartPtr](#)< const [VectorSpace](#) > d_space, const [SmartPtr](#)< const [MatrixSpace](#) > jac_c_space, const [SmartPtr](#)< const [MatrixSpace](#) > jac_d_space, const [SmartPtr](#)< const [SymMatrixSpace](#) > h_space, const [Matrix](#) &Px_L, const [Vector](#) &x_L, const [Matrix](#) &Px_U, const [Vector](#) &x_U, Number &df, [SmartPtr](#)< [Vector](#) > &dx, [SmartPtr](#)< [Vector](#) > &dc, [SmartPtr](#)< [Vector](#) > &dd)

Overloaded from [StandardScalingBase](#).

Additional Inherited Members

3.118.1 Detailed Description

Class implementing the scaling object that doesn't to any scaling.

Definition at line 400 of file [IpNLPScaling.hpp](#).

The documentation for this class was generated from the following file:


- [IpNLPScaling.hpp](#)

3.119 Ipopt::Observer Class Reference

Slight Variation of the [Observer](#) Design Pattern.

```
#include <IpObserver.hpp>
```

Inheritance diagram for [Ipopt::Observer](#):

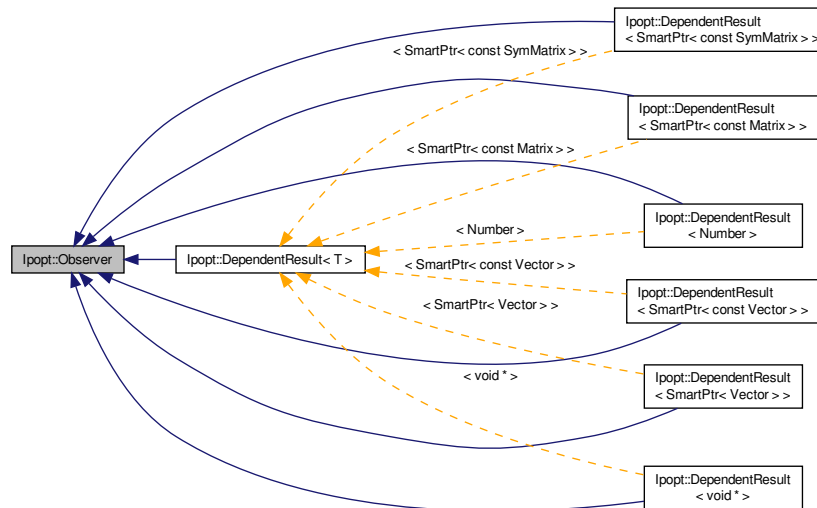

Public Types

- enum [NotifyType](#)

Enumeration specifying the type of notification.

Public Member Functions

Constructors/Destructors

- [Observer](#) ()
Default Constructor.
- virtual [~Observer](#) ()
Default destructor.

Protected Member Functions

- void [RequestAttach](#) ([NotifyType](#) notify_type, const [Subject](#) *subject)
Derived classes should call this method to request an "Attach" to a [Subject](#).
- void [RequestDetach](#) ([NotifyType](#) notify_type, const [Subject](#) *subject)
Derived classes should call this method to request a "Detach" to a [Subject](#).
- virtual void [RecieveNotification](#) ([NotifyType](#) notify_type, const [Subject](#) *subject)=0
Derived classes should overload this method to recieve the requested notification from attached Subjects.

3.119.1 Detailed Description

Slight Variation of the [Observer](#) Design Pattern.

This class implements the [Observer](#) class of the [Observer](#) Design Pattern. An [Observer](#) "Attach"es to a [Subject](#), indicating that it would like to be notified of changes in the [Subject](#). Any derived class wishing to recieve notifications from a [Subject](#) should inherit off of [Observer](#) and overload the protected method, [RecieveNotification_](#)(...).

Definition at line 39 of file IpObserver.hpp.

3.119.2 Member Function Documentation

3.119.2.1 void Ipopt::Observer::RequestAttach ([NotifyType](#) notify_type, const [Subject](#) * subject) [inline],
[protected]

Derived classes should call this method to request an "Attach" to a [Subject](#).

Do not call "Attach" explicitly on the [Subject](#) since further processing is done here

Definition at line 219 of file IpObserver.hpp.

3.119.2.2 void Ipopt::Observer::RequestDetach ([NotifyType](#) notify_type, const [Subject](#) * subject) [inline],
[protected]

Derived classes should call this method to request a "Detach" to a [Subject](#).

Do not call "Detach" explicitly on the [Subject](#) since further processing is done here

Definition at line 238 of file IpObserver.hpp.

The documentation for this class was generated from the following file:


- IpObserver.hpp

3.120 Ipopt::OptimalityErrorConvergenceCheck Class Reference

Brief Class Description.

```
#include <IpOptErrorConvCheck.hpp>
```

Inheritance diagram for Ipopt::OptimalityErrorConvergenceCheck:

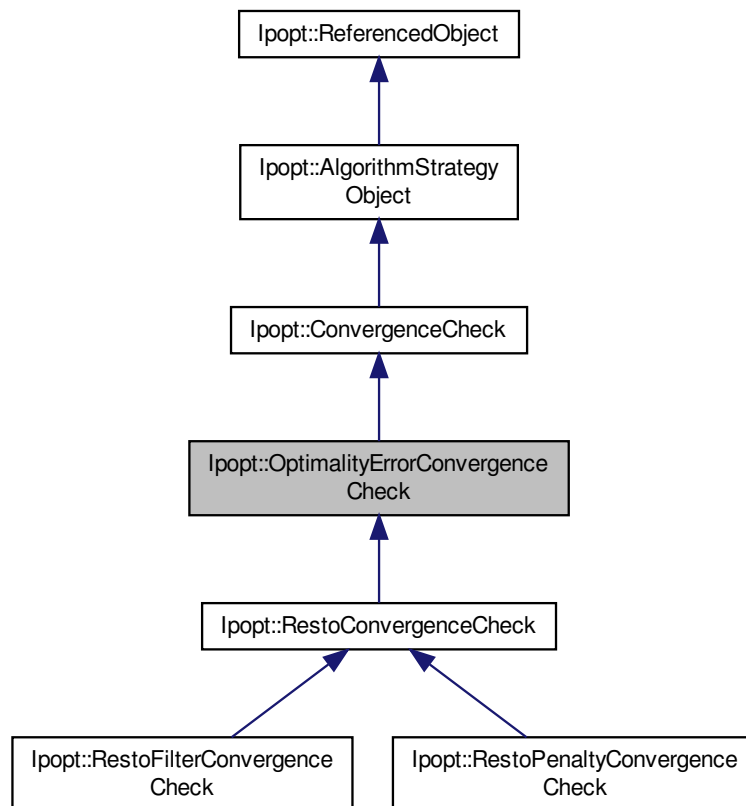

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual [ConvergenceStatus](#) [CheckConvergence](#) (bool call_intermediate_callback=true)
Overloaded convergence check.
- virtual bool [CurrentIsAcceptable](#) ()
Auxilliary function for testing whether current iterate satisfies the acceptable level of optimality.

Constructors/Destructors

- [OptimalityErrorConvergenceCheck](#) ()

Default Constructor.

- virtual [~OptimalityErrorConvergenceCheck](#) ()

Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)

Methods for IpoptType.

Protected Attributes

Algorithmic parameters

- Index [max_iterations_](#)
Maximal number of iterations.
- Number [dual_inf_tol_](#)
Tolerance on unscaled dual infeasibility.
- Number [constr_viol_tol_](#)
Tolerance on unscaled constraint violation.
- Number [compl_inf_tol_](#)
Tolerance on unscaled complementarity.
- Index [acceptable_iter_](#)
Number of iterations with acceptable level of accuracy, after which the algorithm terminates.
- Number [acceptable_tol_](#)
Acceptable tolerance for the problem to terminate earlier if algorithm seems stuck or cycling.
- Number [acceptable_dual_inf_tol_](#)
Acceptable tolerance on unscaled dual infeasibility.
- Number [acceptable_constr_viol_tol_](#)
Acceptable tolerance on unscaled constraint violation.
- Number [acceptable_compl_inf_tol_](#)
Acceptable tolerance on unscaled complementarity.
- Number [acceptable_obj_change_tol_](#)
Acceptable tolerance for relative objective function change from iteration to iteration.
- Number [diverging_iterates_tol_](#)
Threshold for primal iterates for divergence test.
- Number [mu_target_](#)
Desired value of the barrier parameter.
- Number [max_cpu_time_](#)
Upper bound on CPU time.

Additional Inherited Members

3.120.1 Detailed Description

Brief Class Description.

Detailed Class Description.

Definition at line 20 of file IpOptErrorConvCheck.hpp.

3.120.2 Member Data Documentation

3.120.2.1 Index Ipopt::OptimalityErrorConvergenceCheck::acceptable_iter_ [protected]

Number of iterations with acceptable level of accuracy, after which the algorithm terminates.

If 0, this heuristic is disabled.

Definition at line 63 of file IpOptErrorConvCheck.hpp.

3.120.2.2 Number Ipopt::OptimalityErrorConvergenceCheck::acceptable_obj_change_tol_ [protected]

Acceptable tolerance for relative objective function change from iteratoin to iteration.

Definition at line 75 of file IpOptErrorConvCheck.hpp.

The documentation for this class was generated from the following file:


- IpOptErrorConvCheck.hpp

3.121 Ipopt::OptionsList Class Reference

This class stores a list of user set options.

```
#include <IpOptionsList.hpp>
```

Inheritance diagram for Ipopt::OptionsList:



Classes

- class **OptionValue**
Class for storing the value and counter for each option in [OptionsList](#).

Public Member Functions

- virtual void [clear](#) ()
Method for clearing all previously set options.
- virtual void [PrintList](#) (std::string &list) const
Get a string with the list of all options (tag, value, counter)

- virtual void **PrintUserOptions** (std::string &list) const
Get a string with the list of all options set by the user (tag, value, use/notused).
- virtual bool **ReadFromStream** (const **Journalist** &jnlst, std::istream &is)
Read options from the stream is.

Constructors/Destructors

- **OptionsList** (**SmartPtr**< **RegisteredOptions** > reg_options, **SmartPtr**< **Journalist** > jnlst)
- **OptionsList** ()
- **OptionsList** (const **OptionsList** ©)
Copy Constructor.
- virtual **~OptionsList** ()
Default destructor.
- virtual void **operator=** (const **OptionsList** &source)
Overloaded Equals Operator.

Get / Set Methods

- virtual void **SetRegisteredOptions** (const **SmartPtr**< **RegisteredOptions** > reg_options)
- virtual void **SetJournalist** (const **SmartPtr**< **Journalist** > jnlst)

Methods for setting options

- virtual bool **SetStringValue** (const std::string &tag, const std::string &value, bool allow_clobber=true, bool dont_print=false)
- virtual bool **SetNumericValue** (const std::string &tag, Number value, bool allow_clobber=true, bool dont_print=false)
- virtual bool **SetIntegerValue** (const std::string &tag, Index value, bool allow_clobber=true, bool dont_print=false)

Methods for setting options only if they have not been

set before

- virtual bool **SetStringValueIfUnset** (const std::string &tag, const std::string &value, bool allow_clobber=true, bool dont_print=false)
- virtual bool **SetNumericValueIfUnset** (const std::string &tag, Number value, bool allow_clobber=true, bool dont_print=false)
- virtual bool **SetIntegerValueIfUnset** (const std::string &tag, Index value, bool allow_clobber=true, bool dont_print=false)

Methods for retrieving values from the options list. If

a tag is not found, the methods return false, and value is set to the default value defined in the registered options.

- virtual bool **GetStringValue** (const std::string &tag, std::string &value, const std::string &prefix) const
- virtual bool **GetEnumValue** (const std::string &tag, Index &value, const std::string &prefix) const
- virtual bool **GetBoolValue** (const std::string &tag, bool &value, const std::string &prefix) const
- virtual bool **GetNumericValue** (const std::string &tag, Number &value, const std::string &prefix) const
- virtual bool **GetIntegerValue** (const std::string &tag, Index &value, const std::string &prefix) const

3.121.1 Detailed Description

This class stores a list of user set options.

Each options is identified by a case-insensitive keyword (tag). Its value is stored internally as a string (always lower case), but for convenience set and get methods are provided to obtain Index and Number type values. For each keyword we also keep track of how often the value of an option has been requested by a get method.

Definition at line 32 of file IpOptionsList.hpp.

3.121.2 Member Function Documentation

3.121.2.1 virtual void Ipopt::OptionsList::PrintUserOptions (std::string & *list*) const [virtual]

Get a string with the list of all options set by the user (tag, value, use/notused).

Here, options with dont_print flag set to true are not printed.

3.121.2.2 virtual bool Ipopt::OptionsList::ReadFromStream (const Journalist & *jnlst*, std::istream & *is*) [virtual]

Read options from the stream is.

Returns false if an error was encountered.

The documentation for this class was generated from the following file:


- IpOptionsList.hpp

3.122 Ipopt::OrigIpoptNLP Class Reference

This class maps the traditional [NLP](#) into something that is more useful by Ipopt.

```
#include <IpOrigIpoptNLP.hpp>
```

Inheritance diagram for Ipopt::OrigIpoptNLP:

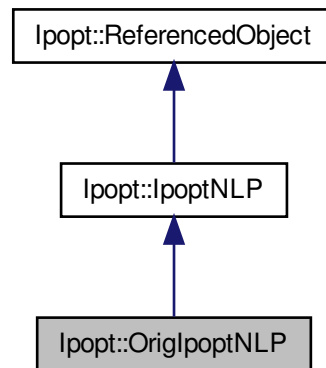

Public Member Functions

- virtual bool [Initialize](#) (const [Journalist](#) &jnlst, const [OptionsList](#) &options, const std::string &prefix)
Initialize - overloaded from [IpoptNLP](#).
- virtual bool [InitializeStructures](#) ([SmartPtr](#)< [Vector](#) > &x, bool init_x, [SmartPtr](#)< [Vector](#) > &y_c, bool init_y_c, [SmartPtr](#)< [Vector](#) > &y_d, bool init_y_d, [SmartPtr](#)< [Vector](#) > &z_L, bool init_z_L, [SmartPtr](#)< [Vector](#) > &z_U, bool init_z_U, [SmartPtr](#)< [Vector](#) > &v_L, [SmartPtr](#)< [Vector](#) > &v_U)
Initialize (create) structures for the iteration data.
- virtual bool [GetWarmStartIterate](#) ([IteratesVector](#) &warm_start_iterate)

Method accessing the GetWarmStartIterate of the NLP.

- virtual void **GetSpaces** (SmartPtr< const VectorSpace > &x_space, SmartPtr< const VectorSpace > &c_space, SmartPtr< const VectorSpace > &d_space, SmartPtr< const VectorSpace > &x_l_space, SmartPtr< const MatrixSpace > &px_l_space, SmartPtr< const VectorSpace > &x_u_space, SmartPtr< const MatrixSpace > &px_u_space, SmartPtr< const VectorSpace > &d_l_space, SmartPtr< const MatrixSpace > &pd_l_space, SmartPtr< const VectorSpace > &d_u_space, SmartPtr< const MatrixSpace > &pd_u_space, SmartPtr< const MatrixSpace > &Jac_c_space, SmartPtr< const MatrixSpace > &Jac_d_space, SmartPtr< const SymMatrixSpace > &Hess_lagrangian_space)

Accessor method for vector/matrix spaces pointers.

- virtual void **AdjustVariableBounds** (const Vector &new_x_L, const Vector &new_x_U, const Vector &new_d_L, const Vector &new_d_U)

Method for adapting the variable bounds.

- SmartPtr< NLP > **nlp** ()

Accessor method to the underlying NLP.

Constructors/Destructors

- **OrigIpoptNLP** (const SmartPtr< const Journalist > &jnlst, const SmartPtr< NLP > &nlp, const SmartPtr< NLPScalingObject > &nlp_scaling)
- virtual **~OrigIpoptNLP** ()

Default destructor.

- virtual Number **f** (const Vector &x)

Accessor methods for model data.

- virtual Number **f** (const Vector &x, Number mu)

Objective value (depending in mu) - incorrect version for OrigIpoptNLP.

- virtual SmartPtr< const Vector > **grad_f** (const Vector &x)

Gradient of the objective.

- virtual SmartPtr< const Vector > **grad_f** (const Vector &x, Number mu)

Gradient of the objective (depending in mu) - incorrect version for OrigIpoptNLP.

- virtual SmartPtr< const Vector > **c** (const Vector &x)

Equality constraint residual.

- virtual SmartPtr< const Matrix > **jac_c** (const Vector &x)

Jacobian Matrix for equality constraints.

- virtual SmartPtr< const Vector > **d** (const Vector &x)

Inequality constraint residual (reformulated as equalities with slacks).

- virtual SmartPtr< const Matrix > **jac_d** (const Vector &x)

Jacobian Matrix for inequality constraints.

- virtual SmartPtr< const SymMatrix > **h** (const Vector &x, Number obj_factor, const Vector &yc, const Vector &yd)

Hessian of the Lagrangian.

- virtual SmartPtr< const SymMatrix > **h** (const Vector &x, Number obj_factor, const Vector &yc, const Vector &yd, Number mu)

Hessian of the Lagrangian (depending in mu) - incorrect version for OrigIpoptNLP.

- virtual SmartPtr< const SymMatrix > **uninitialized_h** ()

Provides a Hessian matrix from the correct matrix space with uninitialized values.

- virtual SmartPtr< const Vector > **x_L** () const

Lower bounds on x.

- virtual SmartPtr< const Matrix > **Px_L** () const

Permutation matrix (x_L -> x)

- virtual [SmartPtr](#)< const [Vector](#) > [x_U](#) () const
Upper bounds on x.
- virtual [SmartPtr](#)< const [Matrix](#) > [Px_U](#) () const
Permutation matrix ($x_U \rightarrow x$).
- virtual [SmartPtr](#)< const [Vector](#) > [d_L](#) () const
Lower bounds on d.
- virtual [SmartPtr](#)< const [Matrix](#) > [Pd_L](#) () const
Permutation matrix ($d_L \rightarrow d$).
- virtual [SmartPtr](#)< const [Vector](#) > [d_U](#) () const
Upper bounds on d.
- virtual [SmartPtr](#)< const [Matrix](#) > [Pd_U](#) () const
Permutation matrix ($d_U \rightarrow d$).
- virtual [SmartPtr](#)< const [SymMatrixSpace](#) > [HessianMatrixSpace](#) () const
Accessor method to obtain the [MatrixSpace](#) for the Hessian matrix (or it's approximation)

Counters for the number of function evaluations.

- virtual Index [f_evals](#) () const
 - virtual Index [grad_f_evals](#) () const
 - virtual Index [c_evals](#) () const
 - virtual Index [jac_c_evals](#) () const
 - virtual Index [d_evals](#) () const
 - virtual Index [jac_d_evals](#) () const
 - virtual Index [h_evals](#) () const
-
- void [FinalizeSolution](#) (SolverReturn status, const [Vector](#) &x, const [Vector](#) &z_L, const [Vector](#) &z_U, const [Vector](#) &c, const [Vector](#) &d, const [Vector](#) &y_c, const [Vector](#) &y_d, Number obj_value, const [IpoptData](#) *ip_data, [Ipopt-CalculatedQuantities](#) *ip_cq)
Solution Routines - overloaded from [IpoptNLP](#).

Methods related to function evaluation timing.

- void [ResetTimes](#) ()
Reset the timing statistics.
- void [PrintTimingStatistics](#) ([Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category) const
- const [TimedTask](#) & [f_eval_time](#) () const
- const [TimedTask](#) & [grad_f_eval_time](#) () const
- const [TimedTask](#) & [c_eval_time](#) () const
- const [TimedTask](#) & [jac_c_eval_time](#) () const
- const [TimedTask](#) & [d_eval_time](#) () const
- const [TimedTask](#) & [jac_d_eval_time](#) () const
- const [TimedTask](#) & [h_eval_time](#) () const
- Number [TotalFunctionEvaluationCpuTime](#) () const
- Number [TotalFunctionEvaluationSysTime](#) () const
- Number [TotalFunctionEvaluationWallclockTime](#) () const

Static Public Member Functions

Methods for IpoptType

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
Called by [IpoptType](#) to register the options.

3.122.1 Detailed Description

This class maps the traditional [NLP](#) into something that is more useful by Ipopt.

This class takes care of storing the calculated model results, handles caching, and (some day) takes care of addition of slacks.

Definition at line 37 of file IpOrigIpoptNLP.hpp.

3.122.2 Member Function Documentation

3.122.2.1 virtual Number Ipopt::OrigIpoptNLP::f (const Vector & x) [virtual]

Accessor methods for model data.

Objective value

Implements [Ipopt::IpoptNLP](#).

3.122.2.2 virtual SmartPtr<const SymMatrix> Ipopt::OrigIpoptNLP::uninitialized_h () [virtual]

Provides a Hessian matrix from the correct matrix space with uninitialized values.

This can be used in LeastSquareMults to obtain a "zero Hessian".

Implements [Ipopt::IpoptNLP](#).

3.122.2.3 virtual void Ipopt::OrigIpoptNLP::AdjustVariableBounds (const Vector & new_x_L, const Vector & new_x_U, const Vector & new_d_L, const Vector & new_d_U) [virtual]

Method for adapting the variable bounds.

This is called if slacks are becoming too small

Implements [Ipopt::IpoptNLP](#).

The documentation for this class was generated from the following file:


- IpOrigIpoptNLP.hpp

3.123 Ipopt::OrigIterationOutput Class Reference

Class for the iteration summary output for the original [NLP](#).

```
#include <IpOrigIterationOutput.hpp>
```

Inheritance diagram for Ipopt::OrigIterationOutput:

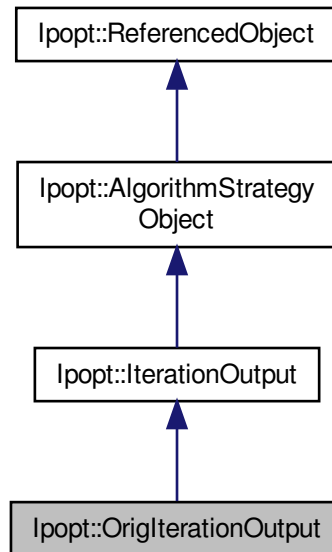

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual void [WriteOutput](#) ()
Method to do all the summary output per iteration.

Constructors/Destructors

- [OrigIterationOutput](#) ()
Default Constructor.
- virtual [~OrigIterationOutput](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)
Methods for [OptionsList](#).

Additional Inherited Members

3.123.1 Detailed Description

Class for the iteration summary output for the original [NLP](#).

Definition at line 19 of file IpOrigIterationOutput.hpp.

3.123.2 Member Function Documentation

3.123.2.1 virtual void Ipopt::OrigIterationOutput::WriteOutput () [virtual]

Method to do all the summary output per iteration.

This include the one-line summary output as well as writing the details about the iterates if desired

Implements [Ipopt::IterationOutput](#).

The documentation for this class was generated from the following file:


- IpOrigIterationOutput.hpp

3.124 Ipopt::PardisoSolverInterface Class Reference

Interface to the linear solver Pardiso, derived from [SparseSymLinearSolverInterface](#).

```
#include <IpPardisoSolverInterface.hpp>
```

Inheritance diagram for Ipopt::PardisoSolverInterface:

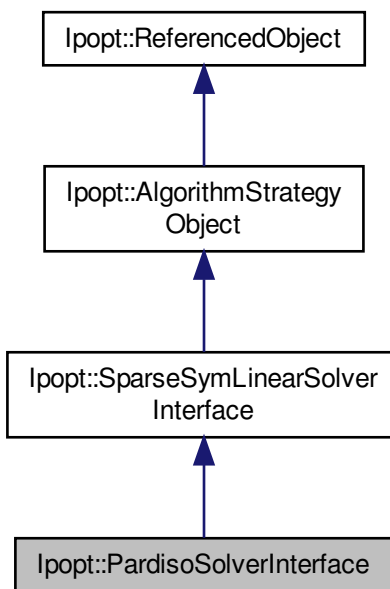

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)

overloaded from [AlgorithmStrategyObject](#)

Constructor/Destructor

- [PardisoSolverInterface](#) ()
Constructor.
- virtual [~PardisoSolverInterface](#) ()
Destructor.

Methods for requesting solution of the linear system.

- virtual ESymSolverStatus [InitializeStructure](#) (Index dim, Index nonzeros, const Index *ia, const Index *ja)
Method for initializing internal stuctures.
- virtual double * [GetValuesArrayPtr](#) ()
Method returning an internal array into which the nonzero elements are to be stored.
- virtual ESymSolverStatus [MultiSolve](#) (bool new_matrix, const Index *ia, const Index *ja, Index nrhs, double *rhs_vals, bool check_NegEVals, Index numberOfNegEVals)
Solve operation for multiple right hand sides.
- virtual Index [NumberOfNegEVals](#) () const
Number of negative eigenvalues detected during last factorization.
- virtual bool [IncreaseQuality](#) ()
Request to increase quality of solution for next solve.
- virtual bool [ProvidesInertia](#) () const
Query whether inertia is computed by linear solver.
- [EMatrixFormat](#) [MatrixFormat](#) () const
Query of requested matrix type that the linear solver understands.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members

3.124.1 Detailed Description

Interface to the linear solver Pardiso, derived from [SparseSymLinearSolverInterface](#).

For details, see description of [SparseSymLinearSolverInterface](#) base class.

Definition at line 24 of file IpPardisoSolverInterface.hpp.

3.124.2 Member Function Documentation

- 3.124.2.1 virtual ESymSolverStatus Ipopt::PardisoSolverInterface::InitializeStructure (Index *dim*, Index *nonzeros*, const Index * *ia*, const Index * *ja*) [virtual]

Method for initializing internal stuctures.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.124.2.2 `virtual double* Ipopt::PardisoSolverInterface::GetValuesArrayPtr ( ) [virtual]`

Method returning an internal array into which the nonzero elements are to be stored.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.124.2.3 `virtual ESymSolverStatus Ipopt::PardisoSolverInterface::MultiSolve ( bool new_matrix, const Index * ia, const Index * ja, Index nrhs, double * rhs_vals, bool check_NegEVals, Index numberOfNegEVals ) [virtual]`

Solve operation for multiple right hand sides.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.124.2.4 `virtual bool Ipopt::PardisoSolverInterface::ProvidesInertia ( ) const [inline],[virtual]`

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 76 of file `IpPardisoSolverInterface.hpp`.

The documentation for this class was generated from the following file:


- `IpPardisoSolverInterface.hpp`

3.125 Ipopt::PDFullSpaceSolver Class Reference

This is the implementation of the Primal-Dual System, using the full space approach with a direct linear solver.

```
#include <IpPDFullSpaceSolver.hpp>
```

Inheritance diagram for Ipopt::PDFullSpaceSolver:

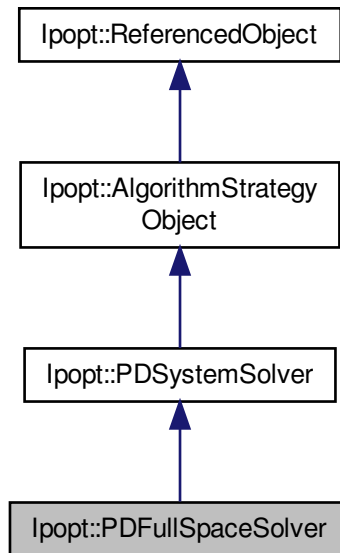

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [Solve](#) (Number alpha, Number beta, const [IteratesVector](#) &rhs, [IteratesVector](#) &res, bool allow_inexact=false, bool improve_solution=false)
Solve the primal dual system, given one right hand side.

/Destructor

- [PDFullSpaceSolver](#) ([AugSystemSolver](#) &augSysSolver, [PDPerturbationHandler](#) &perturbHandler)
Constructor that takes in the Augmented System solver that is to be used inside.
- virtual [~PDFullSpaceSolver](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members

3.125.1 Detailed Description

This is the implemetation of the Primal-Dual System, using the full space approach with a direct linear solver.

A note on the iterative refinement: We perform at least `min_refinement_steps` number of iterative refinement steps. If after one iterative refinement the quality of the solution (defined in `ResidualRatio`) does not improve or the maximal number of iterative refinement steps is exceeded before the tolerance `residual_ratio_max_` is satisfied, we first ask the linear solver to solve the system more accurately (e.g. by increasing the pivot tolerance). If that doesn't help or is not possible, we treat the system, as if it is singular (i.e. increase delta's).

Definition at line 32 of file `IpPDFullSpaceSolver.hpp`.

The documentation for this class was generated from the following file:


- `IpPDFullSpaceSolver.hpp`

3.126 Ipopt::PDPerturbationHandler Class Reference

Class for handling the perturbation factors `delta_x`, `delta_s`, `delta_c`, and `delta_d` in the primal dual system.

```
#include <IpPDPerturbationHandler.hpp>
```

Inheritance diagram for `Ipopt::PDPerturbationHandler`:

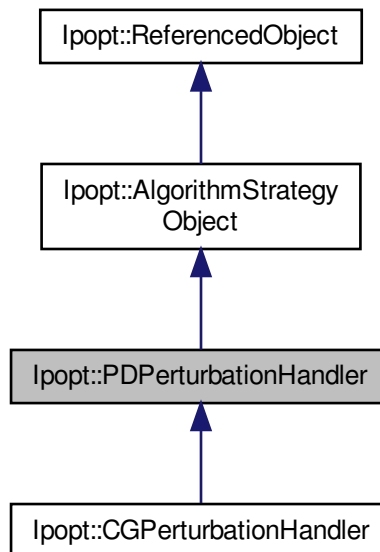

Public Member Functions

- virtual bool `InitializeImpl` (const `OptionsList` &options, const std::string &prefix)
Implementation of the initialization method that has to be overloaded by for each derived class.
- virtual bool `ConsiderNewSystem` (Number &delta_x, Number &delta_s, Number &delta_c, Number &delta_d)

This method must be called for each new matrix, and before any other method for generating perturbation factors.

- virtual bool [PerturbForSingularity](#) (Number &delta_x, Number &delta_s, Number &delta_c, Number &delta_d)

This method returns pertubation factors for the case when the most recent factorization resulted in a singular matrix.

- virtual bool [PerturbForWrongInertia](#) (Number &delta_x, Number &delta_s, Number &delta_c, Number &delta_d)

This method returns pertubation factors for the case when the most recent factorization resulted in a matrix with an incorrect number of negative eigenvalues.

- virtual void [CurrentPerturbation](#) (Number &delta_x, Number &delta_s, Number &delta_c, Number &delta_d)

Just return the perturbation values that have been determined most recently.

Constructors/Destructors

- [PDPerturbationHandler](#) ()

Default Constructor.

- virtual [~PDPerturbationHandler](#) ()

Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)

Methods for IpoptType.

Protected Member Functions

Default Compiler Generated Methods

(Hidden to avoid implicit creation/calling).

These methods are not implemented and we do not want the compiler to implement them for us, so we declare them private and do not define them. This ensures that they will not be implicitly created/called.

- [PDPerturbationHandler](#) (const [PDPerturbationHandler](#) &)

Copy Constructor.

- void [operator=](#) (const [PDPerturbationHandler](#) &)

Overloaded Equals Operator.

Auxilliary methods

- bool [get_deltas_for_wrong_inertia](#) (Number &delta_x, Number &delta_s, Number &delta_c, Number &delta_d)

Internal version of PerturbForWrongInertia with the difference, that finalize_test is not called.

- void [finalize_test](#) ()

This method is call whenever a matrix had been factorization and is not singular.

- Number [delta_cd](#) ()

Compute perturbation value for constraints.

Protected Attributes

- bool [get_deltas_for_wrong_inertia_called](#)

Flag indicating if for the given matrix the perturb for wrong inertia method has already been called.

Size of the most recent non-zero perturbation.

- Number [delta_x_last_](#)
The last nonzero value for delta_x.
- Number [delta_s_last_](#)
The last nonzero value for delta_s.
- Number [delta_c_last_](#)
The last nonzero value for delta_c.
- Number [delta_d_last_](#)
The last nonzero value for delta_d.

Size of the most recently suggested perturbation for the current matrix.

- Number [delta_x_curr_](#)
The current value for delta_x.
- Number [delta_s_curr_](#)
The current value for delta_s.
- Number [delta_c_curr_](#)
The current value for delta_c.
- Number [delta_d_curr_](#)
The current value for delta_d.

Algorithmic parameters.

- Number [delta_xs_max_](#)
Maximal perturbation for x and s.
- Number [delta_xs_min_](#)
Smallest possible perturbation for x and s.
- Number [delta_xs_first_inc_fact_](#)
Increase factor for delta_xs for first required perturbation.
- Number [delta_xs_inc_fact_](#)
Increase factor for delta_xs for later perturbations.
- Number [delta_xs_dec_fact_](#)
Decrease factor for delta_xs for later perturbations.
- Number [delta_xs_init_](#)
Very first trial value for delta_xs perturbation.
- Number [delta_cd_val_](#)
Size of perturbation for c and d blocks.
- Number [delta_cd_exp_](#)
Exponent on mu in formula for of perturbation for c and d blocks.
- bool [reset_last_](#)
Flag indicating whether the new values are based on the perturbations in the last iteration or in the more recent iteration in which a perturbation was done.
- Index [degen_iters_max_](#)
Required number of iterations for degeneracy conclusions.
- bool [perturb_always_cd_](#)
Flag indicating that the delta_c, delta_d perturbation should always be used.

Handling structural degeneracy

- enum [DegenType](#)
Type for degeneracy flags.
- enum [TrialStatus](#)

- *Status of current trial configuration.*
- [DegenType hess_degenerate_](#)
Flag indicating whether the reduced Hessian matrix is thought to be structurally singular.
- [DegenType jac_degenerate_](#)
Flag indicating whether the Jacobian of the constraints is thought to be structurally rank-deficient.
- Index [degen_iters_](#)
Flag counting matrices in which degeneracy was observed in the first successive iterations.
- [TrialStatus test_status_](#)
Current status.

3.126.1 Detailed Description

Class for handling the perturbation factors `delta_x`, `delta_s`, `delta_c`, and `delta_d` in the primal dual system.

This class is used by the [PDFullSpaceSolver](#) to handle the cases where the primal-dual system is singular or has the wrong inertia. The perturbation factors are obtained based on simple heuristics, taking into account the size of previous perturbations.

Definition at line 24 of file `IpPDPerturbationHandler.hpp`.

3.126.2 Member Function Documentation

3.126.2.1 `virtual bool Ipopt::PDPerturbationHandler::InitializeImpl ( const OptionsList & options, const std::string & prefix )`
[virtual]

Implementation of the initialization method that has to be overloaded by for each derived class.

Implements [Ipopt::AlgorithmStrategyObject](#).

Reimplemented in [Ipopt::CGPerturbationHandler](#).

3.126.2.2 `virtual bool Ipopt::PDPerturbationHandler::ConsiderNewSystem ( Number & delta_x, Number & delta_s, Number & delta_c, Number & delta_d )` [virtual]

This method must be called for each new matrix, and before any other method for generating perturbation factors.

Usually, the returned perturbation factors are zero, but if the system is thought to be structurally singular, they might be positive. If the return value is false, no suitable perturbation could be found.

Reimplemented in [Ipopt::CGPerturbationHandler](#).

3.126.2.3 `virtual bool Ipopt::PDPerturbationHandler::PerturbForSingularity ( Number & delta_x, Number & delta_s, Number & delta_c, Number & delta_d )` [virtual]

This method returns perturbation factors for the case when the most recent factorization resulted in a singular matrix.

If the return value is false, no suitable perturbation could be found.

Reimplemented in [Ipopt::CGPerturbationHandler](#).

3.126.2.4 `virtual bool Ipopt::PDPerturbationHandler::PerturbForWrongInertia ( Number & delta_x, Number & delta_s, Number & delta_c, Number & delta_d )` [virtual]

This method returns perturbation factors for the case when the most recent factorization resulted in a matrix with an incorrect number of negative eigenvalues.

If the return value is false, no suitable perturbation could be found.

Reimplemented in [Ipopt::CGPerturbationHandler](#).

3.126.2.5 `bool Ipopt::PDPerturbationHandler::get_deltas_for_wrong_inertia ( Number & delta_x, Number & delta_s, Number & delta_c, Number & delta_d )` `[protected]`

Internal version of PerturbForWrongInertia with the difference, that finalize_test is not called.

Returns false if the delta_x and delta_s parameters become too large.

3.126.2.6 `void Ipopt::PDPerturbationHandler::finalize_test ( )` `[protected]`

This method is call whenever a matrix had been factorization and is not singular.

In here, we can evaluate the outcome of the denegeracy test heuristics.

3.126.3 Member Data Documentation

3.126.3.1 `bool Ipopt::PDPerturbationHandler::get_deltas_for_wrong_inertia_called_` `[protected]`

Flag indicating if for the given matrix the perturb for wrong inertia method has already been called.

Definition at line 116 of file IpPDPerturbationHandler.hpp.

3.126.3.2 `DegenType Ipopt::PDPerturbationHandler::hess_degenerate_` `[protected]`

Flag indicating whether the reduced Hessian matrix is thought to be structurally singular.

Definition at line 130 of file IpPDPerturbationHandler.hpp.

3.126.3.3 `DegenType Ipopt::PDPerturbationHandler::jac_degenerate_` `[protected]`

Flag indicating whether the Jacobian of the constraints is thought to be structurally rank-deficient.

Definition at line 134 of file IpPDPerturbationHandler.hpp.

3.126.3.4 `Index Ipopt::PDPerturbationHandler::degen_iters_` `[protected]`

Flag counting matrices in which degeneracy was observed in the first successive iterations.

-1 means that there was a non-degenerate (unperturbed) matrix at some point.

Definition at line 139 of file IpPDPerturbationHandler.hpp.

3.126.3.5 `Number Ipopt::PDPerturbationHandler::delta_xs_max_` `[protected]`

Maximal perturbation for x and s.

Definition at line 158 of file IpPDPerturbationHandler.hpp.

3.126.3.6 `Number Ipopt::PDPerturbationHandler::delta_xs_min_` `[protected]`

Smallest possible perturbation for x and s.

Definition at line 160 of file IpPDPerturbationHandler.hpp.

3.126.3.7 `Number Ipopt::PDPerturbationHandler::delta_xs_first_inc_fact_` `[protected]`

Increase factor for delta_xs for first required perturbation.

Definition at line 162 of file IpPDPerturbationHandler.hpp.

3.126.3.8 Number Ipopt::PDPerturbationHandler::delta_xs_inc_fact_ [protected]

Increase factor for delta_xs for later perturbations.

Definition at line 164 of file IpPDPerturbationHandler.hpp.

3.126.3.9 Number Ipopt::PDPerturbationHandler::delta_xs_dec_fact_ [protected]

Decrease factor for delta_xs for later perturbations.

Definition at line 166 of file IpPDPerturbationHandler.hpp.

3.126.3.10 Number Ipopt::PDPerturbationHandler::delta_xs_init_ [protected]

Very first trial value for delta_xs perturbation.

Definition at line 168 of file IpPDPerturbationHandler.hpp.

3.126.3.11 Number Ipopt::PDPerturbationHandler::delta_cd_val_ [protected]

Size of perturbation for c and d blocks.

Definition at line 170 of file IpPDPerturbationHandler.hpp.

3.126.3.12 Number Ipopt::PDPerturbationHandler::delta_cd_exp_ [protected]

Exponent on mu in formula for of perturbation for c and d blocks.

Definition at line 172 of file IpPDPerturbationHandler.hpp.

3.126.3.13 bool Ipopt::PDPerturbationHandler::reset_last_ [protected]

Flag indicating whether the new values are based on the perturbations in the last iteration or in the more recent iteration in which a perturbation was done.

Definition at line 176 of file IpPDPerturbationHandler.hpp.

3.126.3.14 Index Ipopt::PDPerturbationHandler::degen_iters_max_ [protected]

Required number of iterations for degeneracy conclusions.

Definition at line 178 of file IpPDPerturbationHandler.hpp.

The documentation for this class was generated from the following file:


- IpPDPerturbationHandler.hpp

3.127 Ipopt::PDSearchDirCalculator Class Reference

Implementation of the search direction calculator that computes the pure primal dual step for the current barrier parameter.

```
#include <IpPDSearchDirCalc.hpp>
```

Inheritance diagram for Ipopt::PDSearchDirCalculator:

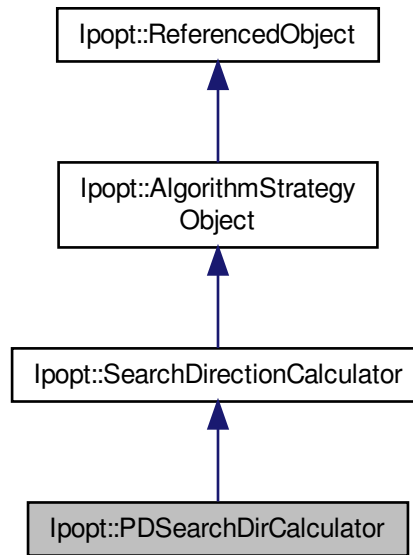

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [ComputeSearchDirection](#) ()
Method for computing the search direction.
- [SmartPtr< PDSystemSolver > PDSolver](#) ()
Method to return the pd_solver for additional processing.

Constructors/Destructors

- [PDSearchDirCalculator](#) (const [SmartPtr< PDSystemSolver >](#) &pd_solver)
Constructor.
- virtual [~PDSearchDirCalculator](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) (const [SmartPtr< RegisteredOptions >](#) &roptions)
Methods for IpoptType.

Additional Inherited Members

3.127.1 Detailed Description

Implementation of the search direction calculator that computes the pure primal dual step for the current barrier parameter.

Definition at line 21 of file IpPDSearchDirCalc.hpp.

3.127.2 Member Function Documentation

3.127.2.1 virtual bool Ipopt::PDSearchDirCalculator::ComputeSearchDirection () [virtual]

Method for computing the search direction.

The computed direction is stored in IpData().delta().

Implements [Ipopt::SearchDirectionCalculator](#).

The documentation for this class was generated from the following file:


- IpPDSearchDirCalc.hpp

3.128 Ipopt::PDSystemSolver Class Reference

Pure Primal Dual System Solver Base Class.

```
#include <IpPDSystemSolver.hpp>
```

Inheritance diagram for Ipopt::PDSystemSolver:

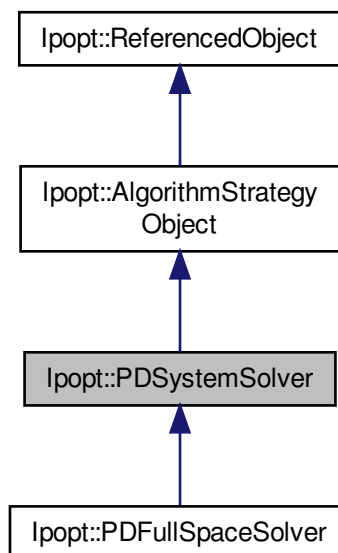

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [Solve](#) (Number alpha, Number beta, const [IteratesVector](#) &rhs, [IteratesVector](#) &res, bool allow_inexact=false, bool improve_solution=false)=0
Solve the primal dual system, given one right hand side.

/Destructor

- [PDSystemSolver](#) ()
Default Constructor.
- virtual [~PDSystemSolver](#) ()
Default destructor.

Additional Inherited Members

3.128.1 Detailed Description

Pure Primal Dual System Solver Base Class.

This is the base class for all derived Primal-Dual System Solver Types.

Here, we understand the primal-dual system as the following linear system:

$$\begin{bmatrix} W & 0 & J_c^T & J_d^T & -P_L^x & P_U^x & 0 & 0 \\ 0 & 0 & 0 & -I & 0 & 0 & -P_L^d & P_U^d \\ J_c & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ J_d & -I & 0 & 0 & 0 & 0 & 0 & 0 \\ Z_L(P_L^x)^T & 0 & 0 & 0 & S_L^x & 0 & 0 & 0 \\ -Z_U(P_U^x)^T & 0 & 0 & 0 & 0 & S_U^x & 0 & 0 \\ 0 & V_L(P_L^d)^T & 0 & 0 & 0 & 0 & S_L^s & 0 \\ 0 & -V_U(P_U^d)^T & 0 & 0 & 0 & 0 & 0 & S_U^s \end{bmatrix} \begin{pmatrix} sol_x \\ sol_s \\ sol_c \\ sol_d \\ sol_L^z \\ sol_U^z \\ sol_L^v \\ sol_U^v \end{pmatrix} = \begin{pmatrix} rhs_x \\ rhs_s \\ rhs_c \\ rhs_d \\ rhs_L^z \\ rhs_U^z \\ rhs_L^v \\ rhs_U^v \end{pmatrix}$$

Here, $S_L^x = (P_L^x)^T x - x_L$, $S_U^x = x_U - (P_U^x)^T x$, $S_L^d = (P_L^d)^T d(x) - d_L$, $S_U^d = d_U - (P_U^d)^T d(x)$. The results returned to the caller is $res = \alpha * sol + \beta * res$.

The solution of this linear system (in order to compute the search direction of the algorithm) usually requires a considerable amount of computation time. Therefore, it is important to tailor the solution of this system to the characteristics of the problem. The purpose of this base class is to provide a generic interface to the algorithm that it can use whenever it requires a solution of the above system. Particular implementation can then be written to provide the methods defined here.

It is implicitly assumed here, that the upper left 2 by 2 block is possibly modified (implicitly or explicitly) so that its projection onto the null space of the overall constraint Jacobian $\begin{bmatrix} J_c & 0 \\ J_d & -I \end{bmatrix}$ is positive definite. This is necessary to guarantee certain descent properties of the resulting search direction. For example, in the full space implementation, a multiple of the identity might be added to the upper left 2 by 2 block.

Note that the Solve method might be called several times for different right hand sides, but with identical data. Therefore, if possible, an implemetation of PDSystem should check whether the incoming data has changed, and not redo factorization etc. unless necessary.

Definition at line 76 of file IpPDSystemSolver.hpp.

3.128.2 Member Function Documentation

3.128.2.1 `virtual bool Ipopt::PDSystemSolver::Solve ( Number alpha, Number beta, const IteratesVector & rhs, IteratesVector & res, bool allow_inexact = false, bool improve_solution = false ) [pure virtual]`

Solve the primal dual system, given one right hand side.

If the flag `allow_inexact` is set to true, it is not necessary to solve the system to best accuracy; for example, we don't want iterative refinement during the computation of the second order correction. On the other hand, if `improve_solution` is true, the solution given in `res` should be improved (here `beta` has to be zero, and `res` is assume to be the solution for the system using `rhs`, without the factor `alpha`...). The return value is false, if a solution could not be computed (for example, when the Hessian regularization parameter becomes too large.)

Implemented in [Ipopt::PDFullSpaceSolver](#).

The documentation for this class was generated from the following file:


- `IpPDSystemSolver.hpp`

3.129 Ipopt::PenaltyLSAcceptor Class Reference

Penalty function line search.

```
#include <IpPenaltyLSAcceptor.hpp>
```

Inheritance diagram for `Ipopt::PenaltyLSAcceptor`:

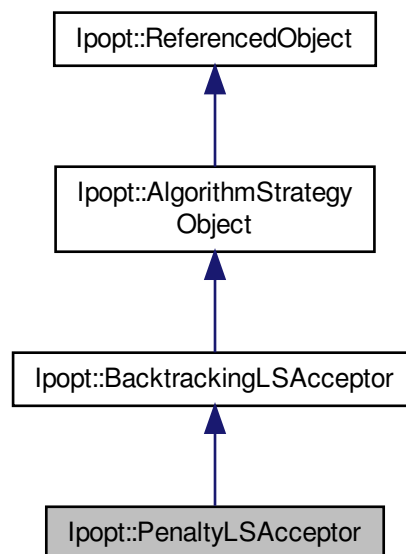

Public Member Functions

- virtual bool `InitializeImpl` (const [OptionsList](#) &`options`, const std::string &`prefix`)

- InitializeImpl* - overloaded from [AlgorithmStrategyObject](#).
- virtual void [Reset](#) ()
Reset the acceptor.
- virtual void [InitThisLineSearch](#) (bool in_watchdog)
Initialization for the next line search.
- virtual void [PrepareRestoPhaseStart](#) ()
Method that is called before the restoration phase is called.
- virtual Number [CalculateAlphaMin](#) ()
Method returning the lower bound on the trial step sizes.
- virtual bool [CheckAcceptabilityOfTrialPoint](#) (Number alpha_primal)
Method for checking if current trial point is acceptable.
- virtual bool [TrySecondOrderCorrection](#) (Number alpha_primal_test, Number &alpha_primal, [SmartPtr](#)< [IteratesVector](#) > &actual_delta)
Try a second order correction for the constraints.
- virtual bool [TryCorrector](#) (Number alpha_primal_test, Number &alpha_primal, [SmartPtr](#)< [IteratesVector](#) > &actual_delta)
Try higher order corrector (for fast local convergence).
- virtual char [UpdateForNextIteration](#) (Number alpha_primal_test)
Method for ending the current line search.
- virtual void [StartWatchDog](#) ()
Method for setting internal data if the watchdog procedure is started.
- virtual void [StopWatchDog](#) ()
Method for setting internal data if the watchdog procedure is stopped.

Constructors/Destructors

- [PenaltyLSAcceptor](#) (const [SmartPtr](#)< [PDSystemSolver](#) > &pd_solver)
Constructor.
- virtual [~PenaltyLSAcceptor](#) ()
Default destructor.

Trial Point Accepting Methods. Used internally to check certain

acceptability criteria and used externally (by the restoration phase convergence check object, for instance)

- bool [IsAcceptableToCurrentIterate](#) (Number trial_barr, Number trial_theta, bool called_from_restoration=false)
const
Checks if a trial point is acceptable to the current iterate.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
Methods for [OptionsList](#).

Additional Inherited Members

3.129.1 Detailed Description

Penalty function line search.

This class implements the penalty function line search procedure as proposed by Waltz, Morales, Nocedal, Orban.

Definition at line 23 of file IpPenaltyLSAcceptor.hpp.

3.129.2 Constructor & Destructor Documentation

3.129.2.1 Ipopt::PenaltyLSAcceptor::PenaltyLSAcceptor (const SmartPtr< PDSystemSolver > & *pd_solver*)

Constructor.

The [PDSystemSolver](#) object only needs to be provided (i.e. not NULL) if second order correction or corrector steps are to be used.

3.129.3 Member Function Documentation

3.129.3.1 virtual void Ipopt::PenaltyLSAcceptor::Reset () [virtual]

Reset the acceptor.

This function should be called if all previous information should be discarded when the line search is performed the next time. For example, this method should be called if the barrier parameter is changed.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.129.3.2 virtual void Ipopt::PenaltyLSAcceptor::InitThisLineSearch (bool *in_watchdog*) [virtual]

Initialization for the next line search.

The flag *in_watchdog* indicates if we are currently in an active watchdog procedure.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.129.3.3 virtual void Ipopt::PenaltyLSAcceptor::PrepareRestoPhaseStart () [virtual]

Method that is called before the restoration phase is called.

Here, we can set up things that are required in the termination test for the restoration phase.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.129.3.4 virtual Number Ipopt::PenaltyLSAcceptor::CalculateAlphaMin () [virtual]

Method returning the lower bound on the trial step sizes.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.129.3.5 virtual bool Ipopt::PenaltyLSAcceptor::CheckAcceptabilityOfTrialPoint (Number *alpha_primal*) [virtual]

Method for checking if current trial point is acceptable.

It is assumed that the delta information in *ip_data* is the search direction used in criteria. The primal trial point has to be set before the call.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.129.3.6 virtual bool Ipopt::PenaltyLSAcceptor::TrySecondOrderCorrection (Number *alpha_primal_test*, Number & *alpha_primal*, SmartPtr< IteratesVector > & *actual_delta*) [virtual]

Try a second order correction for the constraints.

If the first trial step (with incoming *alpha_primal*) has been reject, this tries up to *max_soc_* second order corrections for the constraints. Here, *alpha_primal_test* is the step size that has to be used in the penalty function acceptance tests. On output *actual_delta_* has been set to the step including the second order correction if it has been accepted, otherwise it is unchanged. If the SOC step has been accepted, *alpha_primal* has the fraction-to-the-boundary value for the SOC step on output. The return value is true, if a SOC step has been accepted.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.129.3.7 `virtual bool Ipopt::PenaltyLSAcceptor::TryCorrector ( Number alpha_primal_test, Number & alpha_primal, SmartPtr< IteratesVector > & actual_delta ) [virtual]`

Try higher order corrector (for fast local convergence).

In contrast to a second order correction step, which tries to make an unacceptable point acceptable by improving constraint violation, this corrector step is tried even if the regular primal-dual step is acceptable.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.129.3.8 `virtual char Ipopt::PenaltyLSAcceptor::UpdateForNextIteration ( Number alpha_primal_test ) [virtual]`

Method for ending the current line search.

When it is called, the internal data should be updates. *alpha_primal_test* is the value of alpha that has been used for in the acceptance test ealier.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.129.3.9 `virtual void Ipopt::PenaltyLSAcceptor::StartWatchDog ( ) [virtual]`

Method for setting internal data if the watchdog procedure is started.

Implements [Ipopt::BacktrackingLSAcceptor](#).

3.129.3.10 `virtual void Ipopt::PenaltyLSAcceptor::StopWatchDog ( ) [virtual]`

Method for setting internal data if the watchdog procedure is stopped.

Implements [Ipopt::BacktrackingLSAcceptor](#).

The documentation for this class was generated from the following file:

- IpPenaltyLSAcceptor.hpp

3.130 Ipopt::PiecewisePenalty Class Reference

Class for the Piecewise Penalty.

```
#include <IpPiecewisePenalty.hpp>
```

Public Member Functions

- void [Clear](#) ()
Delete all Piecewise Penalty entries.
- void [Print](#) (const [Journalist](#) &jnlst)
Print current Piecewise Penalty entries.

Constructors/Destructors

- [PiecewisePenalty](#) (Index dim)
Default Constructor.
- [~PiecewisePenalty](#) ()
Default Destructor.

- bool [Acceptable](#) (Number Fzconst, Number Fzlin)
Check acceptability of given coordinates with respect to the Piecewise Penalty.
- Number [BiggestBarr](#) ()
Get the value of the biggest barrier function so far.
- void [UpdateEntry](#) (Number barrier_obj, Number infeas) *Update Piecewise Penalty entry for given coordinates.*
- void [AddEntry](#) (Number pen_r, Number barrier_obj, Number infeas) *Add a entry to the list.*
- void [ResetList](#) (Number pen_r, Number barrier_obj, Number infeas) *Clear and reset the piecewise penalty list.*

3.130.1 Detailed Description

Class for the Piecewise Penalty.

This class contains all Piecewise Penalty entries. The entries are stored as the corner point, including the margin.

Definition at line 39 of file IpPiecewisePenalty.hpp.

3.130.2 Member Function Documentation

3.130.2.1 bool Ipopt::PiecewisePenalty::Acceptable (Number Fzconst, Number Fzlin)

Check acceptability of given coordinates with respect to the Piecewise Penalty.

Returns true, if pair is acceptable

The documentation for this class was generated from the following file:

- IpPiecewisePenalty.hpp

3.131 Ipopt::PiecewisePenEntry Struct Reference

struct for one Piecewise Penalty entry.

```
#include <IpPiecewisePenalty.hpp>
```

3.131.1 Detailed Description

struct for one Piecewise Penalty entry.

Definition at line 25 of file IpPiecewisePenalty.hpp.

The documentation for this struct was generated from the following file:


- IpPiecewisePenalty.hpp

3.132 Ipopt::PointPerturber Class Reference

This class is a simple object for generating randomly perturbed points that are within the [NLP](#) bounds.

```
#include <IpEquilibrationScaling.hpp>
```

Inheritance diagram for Ipopt::PointPerturber:



Public Member Functions

- `SmartPtr< Vector > MakeNewPerturbedPoint () const`
Return a new perturbed point.

Constructors/Destructors

- **PointPerturber** (const `Vector` &reference_point, Number random_pert_radius, const `Matrix` &Px_L, const `Vector` &x_L, const `Matrix` &Px_U, const `Vector` &x_U)
- virtual `~PointPerturber ()`
Default destructor.

3.132.1 Detailed Description

This class is a simple object for generating randomly perturbed points that are within the `NLP` bounds.

The `random_perturb_radius` gives the upper bound of the perturbation.

Definition at line 92 of file `IpEquilibrationScaling.hpp`.

The documentation for this class was generated from the following file:

- `IpEquilibrationScaling.hpp`

3.133 Ipopt::AmplOptionsList::PrivatInfo Class Reference

3.133.1 Detailed Description

Definition at line 163 of file `AmplTNLP.hpp`.

The documentation for this class was generated from the following file:


- `AmplTNLP.hpp`

3.134 Ipopt::ProbingMuOracle Class Reference

Implementation of the probing strategy for computing the barrier parameter.

```
#include <IpProbingMuOracle.hpp>
```

Inheritance diagram for Ipopt::ProbingMuOracle:

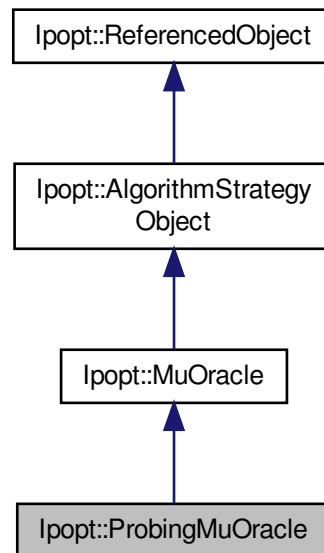

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [CalculateMu](#) (Number mu_min, Number mu_max, Number &new_mu)
Method for computing the value of the barrier parameter that could be used in the current iteration (using Mehrotra's probing heuristic).

Constructors/Destructors

- [ProbingMuOracle](#) (const [SmartPtr](#)< [PDSystemSolver](#) > &pd_solver)
Constructor.
- virtual [~ProbingMuOracle](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members

3.134.1 Detailed Description

Implementation of the probing strategy for computing the barrier parameter.

Definition at line 21 of file IpProbingMuOracle.hpp.

The documentation for this class was generated from the following file:


- IpProbingMuOracle.hpp

3.135 Ipopt::QualityFunctionMuOracle Class Reference

Implementation of the probing strategy for computing the barrier parameter.

```
#include <IpQualityFunctionMuOracle.hpp>
```

Inheritance diagram for Ipopt::QualityFunctionMuOracle:

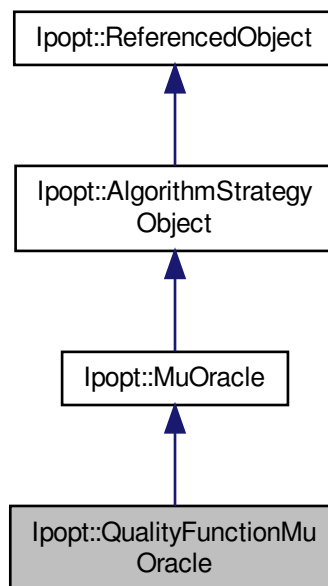

Public Types

Public enums. Some of those are also used for the *quality function*

- enum [NormEnum](#)
enum for norm type

- enum [CentralityEnum](#)
enum for centrality type
- enum [BalancingTermEnum](#)
enum for the quality function balancing term type

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [CalculateMu](#) (Number mu_min, Number mu_max, Number &new_mu)
Method for computing the value of the barrier parameter that could be used in the current iteration (using the LOQO formula).

Constructors/Destructors

- [QualityFunctionMuOracle](#) (const [SmartPtr](#)< [PDSystemSolver](#) > &pd_solver)
Constructor.
- virtual [~QualityFunctionMuOracle](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members

3.135.1 Detailed Description

Implementation of the probing strategy for computing the barrier parameter.

Definition at line 22 of file `IpQualityFunctionMuOracle.hpp`.

The documentation for this class was generated from the following file:


- `IpQualityFunctionMuOracle.hpp`

3.136 Ipopt::ReferencedObject Class Reference

[ReferencedObject](#) class.

```
#include <IpReferenced.hpp>
```

Inheritance diagram for Ipopt::ReferencedObject:

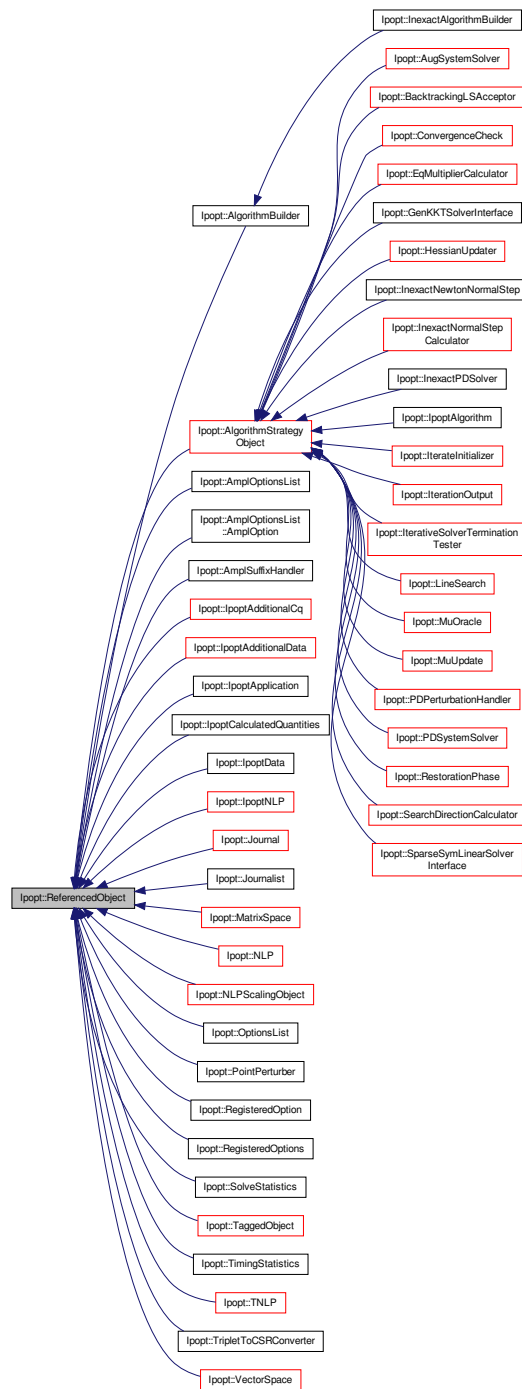

3.136.1 Detailed Description

[ReferencedObject](#) class.

This is part of the implementation of an intrusive smart pointer design. This class stores the reference count of all the smart pointers that currently reference it. See the documentation for the [SmartPtr](#) class for more details.

A [SmartPtr](#) behaves much like a raw pointer, but manages the lifetime of an object, deleting the object automatically. This class implements a reference-counting, intrusive smart pointer design, where all objects pointed to must inherit off of [ReferencedObject](#), which stores the reference count. Although this is intrusive (native types and externally authored classes require wrappers to be referenced by smart pointers), it is a safer design. A more detailed discussion of these issues follows after the usage information.

Usage Example: Note: to use the [SmartPtr](#), all objects to which you point MUST inherit off of [ReferencedObject](#).

```
*
* In MyClass.hpp...
*
* #include "IpReferenced.hpp"
*
* namespace Ipopt {
*
*   class MyClass : public ReferencedObject // must derive from ReferencedObject
*   {
*     ...
*   }
* } // namespace Ipopt
*
*
* In my_usage.cpp...
*
* #include "IpSmartPtr.hpp"
* #include "MyClass.hpp"
*
* void func(AnyObject& obj)
* {
*   SmartPtr<MyClass> ptr_to_myclass = new MyClass(...);
*   // ptr_to_myclass now points to a new MyClass,
*   // and the reference count is 1
*   ...
*
*   obj.SetMyClass(ptr_to_myclass);
*   // Here, let's assume that AnyObject uses a
*   // SmartPtr<MyClass> internally here.
*   // Now, both ptr_to_myclass and the internal
*   // SmartPtr in obj point to the same MyClass object
*   // and its reference count is 2.
*   ...
*
*   // No need to delete ptr_to_myclass, this
*   // will be done automatically when the
*   // reference count drops to zero.
* }
*
*
```

Other Notes: The [SmartPtr](#) implements both dereference operators `->` & `*`. The [SmartPtr](#) does NOT implement a conversion operator to the raw pointer. Use the `GetRawPtr()` method when this is necessary. Make sure that the raw pointer is NOT deleted. The [SmartPtr](#) implements the comparison operators `==` & `!=` for a variety of types. Use these instead of

```
*   if (GetRawPtr(smrt_ptr) == ptr) // Don't use this
*
```

[SmartPtr](#)'s, as currently implemented, do NOT handle circular references. For example: consider a higher level object using [SmartPtr](#)s to point to A and B, but A and B also point to each other (i.e. A has a [SmartPtr](#) to B and B has a

[SmartPtr](#) to A). In this scenario, when the higher level object is finished with A and B, their reference counts will never drop to zero (since they reference each other) and they will not be deleted. This can be detected by memory leak tools like valgrind. If the circular reference is necessary, the problem can be overcome by a number of techniques:

1) A and B can have a method that "releases" each other, that is they set their internal SmartPtrs to NULL.

```
*      void AClass::ReleaseCircularReferences()
*      {
*          smart_ptr_to_B = NULL;
*      }
*
```

Then, the higher level class can call these methods before it is done using A & B.

2) Raw pointers can be used in A and B to reference each other. Here, an implicit assumption is made that the lifetime is controlled by the higher level object and that A and B will both exist in a controlled manner. Although this seems dangerous, in many situations, this type of referencing is very controlled and this is reasonably safe.

3) This [SmartPtr](#) class could be redesigned with the Weak/Strong design concept. Here, the [SmartPtr](#) is identified as being Strong (controls lifetime of the object) or Weak (merely referencing the object). The Strong [SmartPtr](#) increments (and decrements) the reference count in [ReferencedObject](#) but the Weak [SmartPtr](#) does not. In the example above, the higher level object would have Strong SmartPtrs to A and B, but A and B would have Weak SmartPtrs to each other. Then, when the higher level object was done with A and B, they would be deleted. The Weak SmartPtrs in A and B would not decrement the reference count and would, of course, not delete the object. This idea is very similar to item (2), where it is implied that the sequence of events is controlled such that A and B will not call anything using their pointers following the higher level delete (i.e. in their destructors!). This is somehow safer, however, because code can be written (however expensive) to perform run-time detection of this situation. For example, the [ReferencedObject](#) could store pointers to all Weak SmartPtrs that are referencing it and, in its destructor, tell these pointers that it is dying. They could then set themselves to NULL, or set an internal flag to detect usage past this point.

For every most derived object only one [ReferencedObject](#) may exist, that is multiple inheritance requires virtual inheritance, see also the 2nd point in ticket #162.

Comments on Non-Intrusive Design: In a non-intrusive design, the reference count is stored somewhere other than the object being referenced. This means, unless the reference counting pointer is the first referencer, it must get a pointer to the referenced object from another smart pointer (so it has access to the reference count location). In this non-intrusive design, if we are pointing to an object with a smart pointer (or a number of smart pointers), and we then give another smart pointer the address through a RAW pointer, we will have two independent, AND INCORRECT, reference counts. To avoid this pitfall, we use an intrusive reference counting technique where the reference count is stored in the object being referenced.

Definition at line 174 of file IpReferenced.hpp.

The documentation for this class was generated from the following file:

- IpReferenced.hpp

3.137 Ipopt::Referencer Class Reference

Psydo-class, from which everything has to inherit that wants to use be registered as a [Referencer](#) for a [Referenced-Object](#).

```
#include <IpReferenced.hpp>
```

Inherited by [Ipopt::SmartPtr< T >](#), [Ipopt::SmartPtr< AmplSuffixHandler >](#), [Ipopt::SmartPtr< AugSystemSolver >](#), [Ipopt::SmartPtr< BacktrackingLSAcceptor >](#), [Ipopt::SmartPtr< CompoundMatrix >](#), [Ipopt::SmartPtr< CompoundMatrixSpace >](#), [Ipopt::SmartPtr< CompoundSymMatrix >](#), [Ipopt::SmartPtr< CompoundSymMatrixSpace >](#), [Ipopt::SmartPtr< CompoundVector >](#), [Ipopt::SmartPtr< CompoundVectorSpace >](#), [Ipopt::SmartPtr< const AmplOption >](#), [Ipopt::SmartPtr< const CompoundVectorSpace >](#), [Ipopt::SmartPtr< const ExpansionMatrix >](#), [Ipopt::SmartPtr<](#)

[const IteratesVector >](#), [Ipopt::SmartPtr< const Journalist >](#), [Ipopt::SmartPtr< const LowRankUpdateSymMatrixSpace >](#), [Ipopt::SmartPtr< const Matrix >](#), [Ipopt::SmartPtr< const MatrixSpace >](#), [Ipopt::SmartPtr< const MultiVectorMatrix >](#), [Ipopt::SmartPtr< const NLP >](#), [Ipopt::SmartPtr< const ScaledMatrixSpace >](#), [Ipopt::SmartPtr< const SymMatrix >](#), [Ipopt::SmartPtr< const SymMatrixSpace >](#), [Ipopt::SmartPtr< const SymScaledMatrixSpace >](#), [Ipopt::SmartPtr< const Vector >](#), [Ipopt::SmartPtr< const VectorSpace >](#), [Ipopt::SmartPtr< ConvergenceCheck >](#), [Ipopt::SmartPtr< DenseGenMatrix >](#), [Ipopt::SmartPtr< DenseSymMatrix >](#), [Ipopt::SmartPtr< DenseVector >](#), [Ipopt::SmartPtr< DiagMatrix >](#), [Ipopt::SmartPtr< DiagMatrixSpace >](#), [Ipopt::SmartPtr< EqMultiplierCalculator >](#), [Ipopt::SmartPtr< ExpandedMultiVectorMatrix >](#), [Ipopt::SmartPtr< ExpansionMatrix >](#), [Ipopt::SmartPtr< ExpansionMatrixSpace >](#), [Ipopt::SmartPtr< GenKKTsSolverInterface >](#), [Ipopt::SmartPtr< HessianUpdater >](#), [Ipopt::SmartPtr< IdentityMatrixSpace >](#), [Ipopt::SmartPtr< InexactNewtonNormalStep >](#), [Ipopt::SmartPtr< InexactNormalStepCalculator >](#), [Ipopt::SmartPtr< InexactNormalTerminationTester >](#), [Ipopt::SmartPtr< InexactPDSolver >](#), [Ipopt::SmartPtr< IpoptAdditionalCq >](#), [Ipopt::SmartPtr< IpoptAdditionalData >](#), [Ipopt::SmartPtr< IpoptAlgorithm >](#), [Ipopt::SmartPtr< IpoptCalculatedQuantities >](#), [Ipopt::SmartPtr< IpoptData >](#), [Ipopt::SmartPtr< IpoptNLP >](#), [Ipopt::SmartPtr< IterateInitializer >](#), [Ipopt::SmartPtr< IteratesVectorSpace >](#), [Ipopt::SmartPtr< IterationOutput >](#), [Ipopt::SmartPtr< IterativeSolverTerminationTester >](#), [Ipopt::SmartPtr< Journal >](#), [Ipopt::SmartPtr< Journalist >](#), [Ipopt::SmartPtr< LineSearch >](#), [Ipopt::SmartPtr< Matrix >](#), [Ipopt::SmartPtr< MultiVectorMatrix >](#), [Ipopt::SmartPtr< MuOracle >](#), [Ipopt::SmartPtr< MuUpdate >](#), [Ipopt::SmartPtr< NLP >](#), [Ipopt::SmartPtr< NLPScalingObject >](#), [Ipopt::SmartPtr< OptionsList >](#), [Ipopt::SmartPtr< OrigIterationOutput >](#), [Ipopt::SmartPtr< PDPerturbationHandler >](#), [Ipopt::SmartPtr< PDSystemSolver >](#), [Ipopt::SmartPtr< RegisteredOption >](#), [Ipopt::SmartPtr< RegisteredOptions >](#), [Ipopt::SmartPtr< RestorationPhase >](#), [Ipopt::SmartPtr< ScaledMatrixSpace >](#), [Ipopt::SmartPtr< SearchDirectionCalculator >](#), [Ipopt::SmartPtr< SolveStatistics >](#), [Ipopt::SmartPtr< SparseSymLinearSolverInterface >](#), [Ipopt::SmartPtr< SumSymMatrixSpace >](#), [Ipopt::SmartPtr< SymLinearSolver >](#), [Ipopt::SmartPtr< SymMatrix >](#), [Ipopt::SmartPtr< SymScaledMatrixSpace >](#), [Ipopt::SmartPtr< TDependencyDetector >](#), [Ipopt::SmartPtr< TNLP >](#), [Ipopt::SmartPtr< TripletToCSRConverter >](#), [Ipopt::SmartPtr< TSymLinearSolver >](#), [Ipopt::SmartPtr< TSymScalingMethod >](#), and [Ipopt::SmartPtr< Vector >](#).

3.137.1 Detailed Description

Psydo-class, from which everything has to inherit that wants to use be registered as a [Referencer](#) for a [Referenced-Object](#).

Definition at line 27 of file IpReferenced.hpp.

The documentation for this class was generated from the following file:


- IpReferenced.hpp

3.138 Ipopt::RegisteredOption Class Reference

Base class for registered options.

```
#include <IpRegOptions.hpp>
```

Inheritance diagram for Ipopt::RegisteredOption:



Classes

- class [string_entry](#)
class to hold the valid string settings for a string option

Public Member Functions

- virtual void [OutputDescription](#) (const [Journalist](#) &jnlst) const
output a description of the option
- virtual void [OutputShortDescription](#) (const [Journalist](#) &jnlst) const
output a more concise version
- virtual void [OutputLatexDescription](#) (const [Journalist](#) &jnlst) const
output a latex version
- [RegisteredOption](#) (Index counter)
Constructors / Destructors.
- virtual const std::string & [Name](#) () const
Standard Get / Set Methods.
- virtual void [SetName](#) (const std::string &name)
Set the option's name (tag in the input file)
- virtual const std::string & [ShortDescription](#) () const
Get the short description.
- virtual const std::string & [LongDescription](#) () const
Get the long description.
- virtual void [SetShortDescription](#) (const std::string &short_description)
Set the short description.
- virtual void [SetLongDescription](#) (const std::string &long_description)
Set the long description.
- virtual const std::string & [RegisteringCategory](#) () const
Get the registering class.

- virtual void [SetRegisteringCategory](#) (const std::string ®istering_category)
Set the registering class.
- virtual const
RegisteredOptionType & [Type](#) () const
Get the Option's type.
- virtual void [SetType](#) (const RegisteredOptionType &type)
Get the Option's type.
- virtual Index [Counter](#) () const
Counter.

Get / Set methods valid for specific types - NOTE: the Type

must be set before calling these methods.

- virtual const bool & [HasLower](#) () const
check if the option has a lower bound - can be called for OT_Number & OT_Integer
- virtual const bool & [LowerStrict](#) () const
check if the lower bound is strict - can be called for OT_Number
- virtual Number [LowerNumber](#) () const
get the Number version of the lower bound - can be called for OT_Number
- virtual void [SetLowerNumber](#) (const Number &lower, const bool &strict)
set the Number version of the lower bound - can be called for OT_Number
- virtual Index [LowerInteger](#) () const
get the Integer version of the lower bound can be called for OT_Integer
- virtual void [SetLowerInteger](#) (const Index &lower)
set the Integer version of the lower bound - can be called for OT_Integer
- virtual const bool & [HasUpper](#) () const
check if the option has an upper bound - can be called for OT_Number & OT_Integer
- virtual const bool & [UpperStrict](#) () const
check if the upper bound is strict - can be called for OT_Number
- virtual Number [UpperNumber](#) () const
get the Number version of the upper bound - can be called for OT_Number
- virtual void [SetUpperNumber](#) (const Number &upper, const bool &strict)
set the Number version of the upper bound - can be called for OT_Number
- virtual Index [UpperInteger](#) () const
get the Integer version of the upper bound - can be called for OT_Integer
- virtual void [SetUpperInteger](#) (const Index &upper)
set the Integer version of the upper bound - can be called for OT_Integer
- virtual void [AddValidStringSetting](#) (const std::string value, const std::string description)
method to add valid string entries - can be called for OT_String
- virtual Number [DefaultNumber](#) () const
get the default as a Number - can be called for OT_Number
- virtual void [SetDefaultNumber](#) (const Number &default_value)
Set the default as a Number - can be called for OT_Number.
- virtual Index [DefaultInteger](#) () const
get the default as an Integer - can be called for OT_Integer
- virtual void [SetDefaultInteger](#) (const Index &default_value)
Set the default as an Integer - can be called for OT_Integer
- virtual std::string [DefaultString](#) () const
get the default as a string - can be called for OT_String

- virtual Index [DefaultStringAsEnum](#) () const
get the default as a string, but as the index of the string in the list - helps map from a string to an enum- can be called for OT_String
- virtual void [SetDefaultString](#) (const std::string &default_value)
Set the default as a string - can be called for OT_String.
- virtual std::vector< [string_entry](#) > [GetValidStrings](#) () const
get the valid string settings - can be called for OT_String
- virtual bool [IsValidNumberSetting](#) (const Number &value) const
Check if the Number value is a valid setting - can be called for OT_Number.
- virtual bool [IsValidIntegerSetting](#) (const Index &value) const
Check if the Integer value is a valid setting - can be called for OT_Integer.
- virtual bool [IsValidStringSetting](#) (const std::string &value) const
Check if the String value is a valid setting - can be called for OT_String.
- virtual std::string [MapStringSetting](#) (const std::string &value) const
Map a user setting (allowing any case) to the case used when the setting was registered.
- virtual Index [MapStringSettingToEnum](#) (const std::string &value) const
Map a user setting (allowing any case) to the index of the matched setting in the list of string settings.

3.138.1 Detailed Description

Base class for registered options.

The derived types are more specific to a string option or a Number (real) option, etc.

Definition at line 33 of file IpRegOptions.hpp.

3.138.2 Member Function Documentation

3.138.2.1 virtual const std::string& Ipopt::RegisteredOption::Name () const [inline], [virtual]

Standard Get / Set Methods.

Get the option's name (tag in the input file)

Definition at line 97 of file IpRegOptions.hpp.

3.138.2.2 virtual Index Ipopt::RegisteredOption::MapStringSettingToEnum (const std::string & value) const [virtual]

Map a user setting (allowing any case) to the index of the matched setting in the list of string settings.

Helps map a string setting to an enumeration.

The documentation for this class was generated from the following file:


- IpRegOptions.hpp

3.139 Ipopt::RegisteredOptions Class Reference

Class for storing registered options.

```
#include <IpRegOptions.hpp>
```

Inheritance diagram for Ipopt::RegisteredOptions:



Public Member Functions

- virtual const RegOptionsList & [RegisteredOptionsList](#) () const
Giving access to iterable representation of the registered options.
- [RegisteredOptions](#) ()
Constructors / Destructors.
- virtual [~RegisteredOptions](#) ()
Standard Destructor.
- virtual void [SetRegisteringCategory](#) (const std::string ®istering_category)
Methods to interact with registered options.
- virtual std::string [RegisteringCategory](#) ()
retrieve the value of the current registering category
- virtual void [AddNumberOption](#) (const std::string &name, const std::string &short_description, Number default_value, const std::string &long_description="")
Add a Number option (with no restrictions)
- virtual void [AddLowerBoundedNumberOption](#) (const std::string &name, const std::string &short_description, Number lower, bool strict, Number default_value, const std::string &long_description="")
Add a Number option (with a lower bound)
- virtual void [AddUpperBoundedNumberOption](#) (const std::string &name, const std::string &short_description, Number upper, bool strict, Number default_value, const std::string &long_description="")
Add a Number option (with a upper bound)
- virtual void [AddBoundedNumberOption](#) (const std::string &name, const std::string &short_description, Number lower, bool lower_strict, Number upper, bool upper_strict, Number default_value, const std::string &long_description="")
Add a Number option (with a both bounds)
- virtual void [AddIntegerOption](#) (const std::string &name, const std::string &short_description, Index default_value, const std::string &long_description="")
Add a Integer option (with no restrictions)
- virtual void [AddLowerBoundedIntegerOption](#) (const std::string &name, const std::string &short_description, Index lower, Index default_value, const std::string &long_description="")

Add a Integer option (with a lower bound)

- virtual void [AddUpperBoundedIntegerOption](#) (const std::string &name, const std::string &short_description, Index upper, Index default_value, const std::string &long_description="")

Add a Integer option (with a upper bound)

- virtual void [AddBoundedIntegerOption](#) (const std::string &name, const std::string &short_description, Index lower, Index upper, Index default_value, const std::string &long_description="")

Add a Integer option (with a both bounds)

- virtual void [AddStringOption](#) (const std::string &name, const std::string &short_description, const std::string &default_value, const std::vector< std::string > &settings, const std::vector< std::string > &descriptions, const std::string &long_description="")

Add a String option (with no restrictions)

- virtual void [AddStringOption1](#) (const std::string &name, const std::string &short_description, const std::string &default_value, const std::string &setting1, const std::string &description1, const std::string &long_description="")

Methods that make adding string options with only a few entries easier.

- virtual [SmartPtr](#)< const [RegisteredOption](#) > [GetOption](#) (const std::string &name)

Get a registered option - this will return NULL if the option does not exist.

- virtual void [OutputOptionDocumentation](#) (const [Journalist](#) &jnlst, std::list< std::string > &categories)

Output documentation for the options - gives a description, etc.

- virtual void [OutputLatexOptionDocumentation](#) (const [Journalist](#) &jnlst, std::list< std::string > &categories)

Output documentation in Latex format to include in a latex file.

3.139.1 Detailed Description

Class for storing registered options.

Used for validation and documentation.

Definition at line 390 of file IpRegOptions.hpp.

3.139.2 Constructor & Destructor Documentation

3.139.2.1 Ipopt::RegisteredOptions::RegisteredOptions () [inline]

Constructors / Destructors.

Standard Constructor

Definition at line 396 of file IpRegOptions.hpp.

3.139.3 Member Function Documentation

3.139.3.1 virtual void Ipopt::RegisteredOptions::SetRegisteringCategory (const std::string & registering_category) [inline], [virtual]

Methods to interact with registered options.

set the registering class. All subsequent options will be added with the registered class

Definition at line 413 of file IpRegOptions.hpp.

3.139.3.2 virtual void Ipopt::RegisteredOptions::OutputOptionDocumentation (const Journalist & *jnlst*, std::list< std::string > & *categories*) [virtual]

Output documentation for the options - gives a description, etc.

The documentation for this class was generated from the following file:


- IpRegOptions.hpp

3.140 Ipopt::RestoConvergenceCheck Class Reference

Convergence check for the restoration phase.

```
#include <IpRestoConvCheck.hpp>
```

Inheritance diagram for Ipopt::RestoConvergenceCheck:

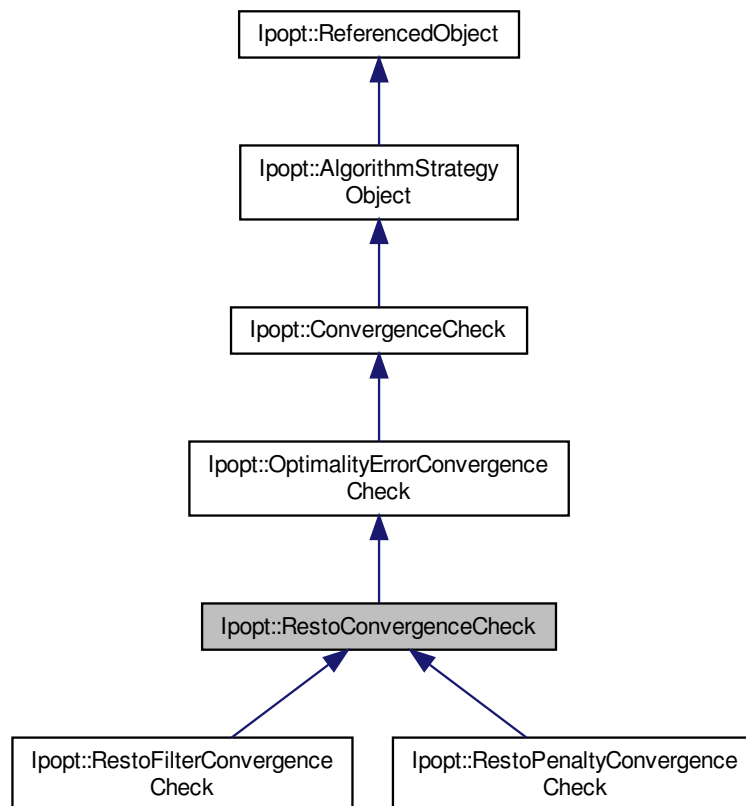

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)

- virtual [ConvergenceStatus CheckConvergence](#) (bool call_intermediate_callback=true)
overloaded from [ConvergenceCheck](#)
- virtual void [SetOrigLSAcceptor](#) (const [BacktrackingLSAcceptor](#) &orig_ls_acceptor)=0
Method for setting the LS acceptor from the main algorithm.

Constructors/Destructors

- [RestoConvergenceCheck](#) ()
Default Constructor.
- virtual [~RestoConvergenceCheck](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)
Methods used by IpoptType.

Additional Inherited Members

3.140.1 Detailed Description

Convergence check for the restoration phase.

This inherits from the [OptimalityErrorConvergenceCheck](#) so that the method for the regular optimality error convergence criterion can be checked as well. In addition, this convergence check returns the CONVERGED message, if the current iteration is acceptable to the original globalization scheme.

Definition at line 29 of file IpRestoConvCheck.hpp.

The documentation for this class was generated from the following file:


- IpRestoConvCheck.hpp

3.141 Ipopt::RestoFilterConvergenceCheck Class Reference

This is the implementation of the restoration convergence check is the original algorithm used the filter globalization mechanism.

```
#include <IpRestoFilterConvCheck.hpp>
```

Inheritance diagram for Ipopt::RestoFilterConvergenceCheck:

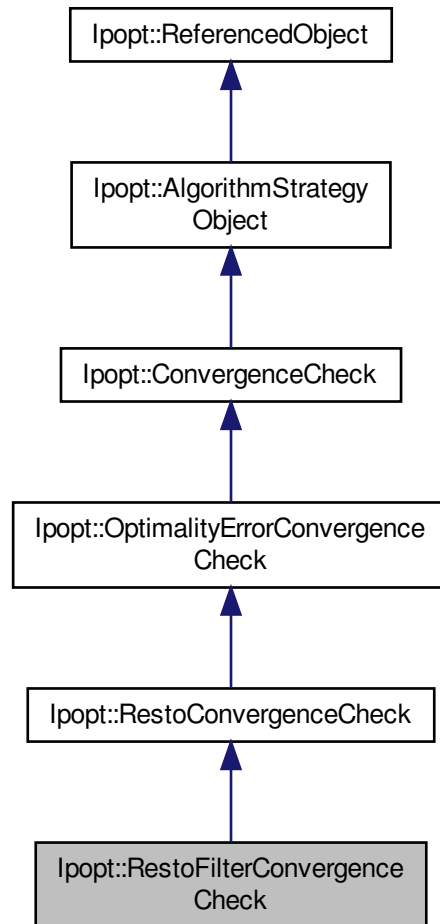

Public Member Functions

- void [SetOrigLSAcceptor](#) (const [BacktrackingLSAcceptor](#) &orig_ls_acceptor)
Set the object for the original filter line search.
- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)

Constructors/Destructors

- [RestoFilterConvergenceCheck](#) ()
Default Constructor.
- virtual [~RestoFilterConvergenceCheck](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)

Methods used by IpoptType.

Additional Inherited Members

3.141.1 Detailed Description

This is the implementation of the restoration convergence check is the original algorithm used the filter globalization mechanism.

Definition at line 24 of file IpRestoFilterConvCheck.hpp.

3.141.2 Member Function Documentation

3.141.2.1 void Ipopt::RestoFilterConvergenceCheck::SetOrigLSAcceptor (const BacktrackingLSAcceptor & orig_ls_acceptor)
[virtual]

Set the object for the original filter line search.

Here, orig_filter_ls_acceptor must be the same strategy object to which the restoration phase object with this object is given. This method must be called to finish the definition of the algorithm, before Initialize is called.

Implements [Ipopt::RestoConvergenceCheck](#).

The documentation for this class was generated from the following file:


- IpRestoFilterConvCheck.hpp

3.142 Ipopt::RestIpoptNLP Class Reference

This class maps the traditional [NLP](#) into something that is more useful by Ipopt.

```
#include <IpRestoIpoptNLP.hpp>
```

Inheritance diagram for Ipopt::RestIpoptNLP:

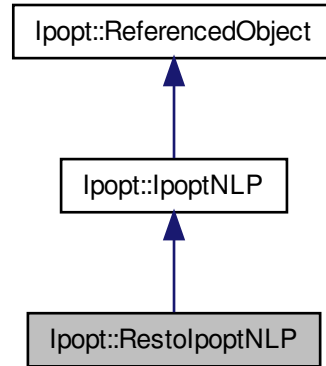

Public Member Functions

- virtual bool [Initialize](#) (const [Journalist](#) &jnlst, const [OptionsList](#) &options, const std::string &prefix)
Initialize - overloaded from [IpoptNLP](#).
- virtual bool [InitializeStructures](#) ([SmartPtr](#)< [Vector](#) > &x, bool init_x, [SmartPtr](#)< [Vector](#) > &y_c, bool init_y_c, [SmartPtr](#)< [Vector](#) > &y_d, bool init_y_d, [SmartPtr](#)< [Vector](#) > &z_L, bool init_z_L, [SmartPtr](#)< [Vector](#) > &z_U, bool init_z_U, [SmartPtr](#)< [Vector](#) > &v_L, [SmartPtr](#)< [Vector](#) > &v_U)
Initialize (create) structures for the iteration data.
- virtual bool [GetWarmStartIterate](#) ([IteratesVector](#) &warm_start_iterate)
Method accessing the [GetWarmStartIterate](#) of the [NLP](#).
- virtual void [GetSpaces](#) ([SmartPtr](#)< const [VectorSpace](#) > &x_space, [SmartPtr](#)< const [VectorSpace](#) > &c_space, [SmartPtr](#)< const [VectorSpace](#) > &d_space, [SmartPtr](#)< const [VectorSpace](#) > &x_l_space, [SmartPtr](#)< const [MatrixSpace](#) > &px_l_space, [SmartPtr](#)< const [VectorSpace](#) > &x_u_space, [SmartPtr](#)< const [MatrixSpace](#) > &px_u_space, [SmartPtr](#)< const [VectorSpace](#) > &d_l_space, [SmartPtr](#)< const [MatrixSpace](#) > &pd_l_space, [SmartPtr](#)< const [VectorSpace](#) > &d_u_space, [SmartPtr](#)< const [MatrixSpace](#) > &pd_u_space, [SmartPtr](#)< const [MatrixSpace](#) > &Jac_c_space, [SmartPtr](#)< const [MatrixSpace](#) > &Jac_d_space, [SmartPtr](#)< const [SymMatrixSpace](#) > &Hess_lagrangian_space)
Accessor method for vector/matrix spaces pointers.
- virtual void [AdjustVariableBounds](#) (const [Vector](#) &new_x_L, const [Vector](#) &new_x_U, const [Vector](#) &new_d_L, const [Vector](#) &new_d_U)
Method for adapting the variable bounds.
- bool [IntermediateCallBack](#) (AlgorithmMode mode, Index iter, Number obj_value, Number inf_pr, Number inf_du, Number mu, Number d_norm, Number regularization_size, Number alpha_pr, Index ls_trials, [SmartPtr](#)< const [IpoptData](#) > ip_data, [SmartPtr](#)< [IpoptCalculatedQuantities](#) > ip_cq)
User callback method.
- Number [Rho](#) () const
Accessor Method for obtaining the [Rho](#) penalization factor for the ell_1 norm.
- Number [Eta](#) (Number mu) const
Method to calculate eta, the factor for the regularization term.

- [SmartPtr](#)< const [Vector](#) > [DR_x](#) () const
Method returning the scaling factors for the 2-norm penalization term.

Constructors/Destructors

- [RestIpoptNLP](#) ([IpoptNLP](#) &orig_ip_nlp, [IpoptData](#) &orig_ip_data, [IpoptCalculatedQuantities](#) &orig_ip_cq)
- [~RestIpoptNLP](#) ()
Default destructor.
- void [FinalizeSolution](#) (SolverReturn status, const [Vector](#) &x, const [Vector](#) &z_L, const [Vector](#) &z_U, const [Vector](#) &c, const [Vector](#) &d, const [Vector](#) &y_c, const [Vector](#) &y_d, Number obj_value, const [IpoptData](#) *ip_data, [IpoptCalculatedQuantities](#) *ip_cq)
Solution Routines - overloaded from [IpoptNLP](#).
- virtual bool [objective_depends_on_mu](#) () const
Accessor methods for model data.
- virtual Number [f](#) (const [Vector](#) &x)
Objective value (incorrect version for restoration phase)
- virtual Number [f](#) (const [Vector](#) &x, Number mu)
Objective value.
- virtual [SmartPtr](#)< const [Vector](#) > [grad_f](#) (const [Vector](#) &x)
Gradient of the objective (incorrect version for restoration phase)
- virtual [SmartPtr](#)< const [Vector](#) > [grad_f](#) (const [Vector](#) &x, Number mu)
Gradient of the objective.
- virtual [SmartPtr](#)< const [Vector](#) > [c](#) (const [Vector](#) &x)
Equality constraint residual.
- virtual [SmartPtr](#)< const [Matrix](#) > [jac_c](#) (const [Vector](#) &x)
Jacobian [Matrix](#) for equality constraints.
- virtual [SmartPtr](#)< const [Vector](#) > [d](#) (const [Vector](#) &x)
Inequality constraint residual (reformulated as equalities with slacks).
- virtual [SmartPtr](#)< const [Matrix](#) > [jac_d](#) (const [Vector](#) &x)
Jacobian [Matrix](#) for inequality constraints.
- virtual [SmartPtr](#)< const [SymMatrix](#) > [h](#) (const [Vector](#) &x, Number obj_factor, const [Vector](#) &yc, const [Vector](#) &y_d)
Hessian of the Lagrangian (incorrect version for restoration phase)
- virtual [SmartPtr](#)< const [SymMatrix](#) > [h](#) (const [Vector](#) &x, Number obj_factor, const [Vector](#) &yc, const [Vector](#) &y_d, Number mu)
Hessian of the Lagrangian.
- virtual [SmartPtr](#)< const [SymMatrix](#) > [uninitialized_h](#) ()
Provides a Hessian matrix from the correct matrix space with uninitialized values.
- virtual [SmartPtr](#)< const [Vector](#) > [x_L](#) () const
Lower bounds on x.
- virtual [SmartPtr](#)< const [Matrix](#) > [Px_L](#) () const
Permutation matrix ($x_L \rightarrow x$)
- virtual [SmartPtr](#)< const [Vector](#) > [x_U](#) () const
Upper bounds on x.
- virtual [SmartPtr](#)< const [Matrix](#) > [Px_U](#) () const
Permutation matrix ($x_U \rightarrow x$).
- virtual [SmartPtr](#)< const [Vector](#) > [d_L](#) () const

Lower bounds on d.

- virtual [SmartPtr](#)< const [Matrix](#) > [Pd_L](#) () const

Permutation matrix (d_L_ -> d)

- virtual [SmartPtr](#)< const [Vector](#) > [d_U](#) () const

Upper bounds on d.

- virtual [SmartPtr](#)< const [Matrix](#) > [Pd_U](#) () const

Permutation matrix (d_U_ -> d).

- virtual [SmartPtr](#)< const [SymMatrixSpace](#) > [HessianMatrixSpace](#) () const

Accessor method to obtain the [MatrixSpace](#) for the Hessian matrix (or it's approximation)

Accessor method for the information of the original NLP.

These methods are not overloaded from [IpoptNLP](#)

- [IpoptNLP](#) & [OrigIpNLP](#) () const
- [IpoptData](#) & [OrigIpData](#) () const
- [IpoptCalculatedQuantities](#) & [OrigIpCq](#) () const

Counters for the number of function evaluations.

- virtual Index [f_evals](#) () const
- virtual Index [grad_f_evals](#) () const
- virtual Index [c_evals](#) () const
- virtual Index [jac_c_evals](#) () const
- virtual Index [d_evals](#) () const
- virtual Index [jac_d_evals](#) () const
- virtual Index [h_evals](#) () const

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)

Methods for IpoptType.

3.142.1 Detailed Description

This class maps the traditional [NLP](#) into something that is more useful by Ipopt.

This class takes care of storing the calculated model results, handles cacheing, and (some day) takes care of addition of slacks.

Definition at line 32 of file IpRestIpoptNLP.hpp.

3.142.2 Member Function Documentation

3.142.2.1 virtual bool Ipopt::RestIpoptNLP::objective_depends_on_mu () const [inline],[virtual]

Accessor methods for model data.

Method for telling [IpoptCalculatedQuantities](#) that the restoration phase objective function depends on the barrier parameter

Reimplemented from [Ipopt::IpoptNLP](#).

Definition at line 89 of file IpRestIpoptNLP.hpp.

3.142.2.2 `virtual SmartPtr<const SymMatrix> Ipopt::RestolpoptNLP::uninitialized_h ( ) [virtual]`

Provides a Hessian matrix from the correct matrix space with uninitialized values.

This can be used in LeastSquareMults to obtain a "zero Hessian".

Implements [Ipopt::IpoptNLP](#).

3.142.2.3 `virtual void Ipopt::RestolpoptNLP::AdjustVariableBounds ( const Vector & new_x_L, const Vector & new_x_U, const Vector & new_d_L, const Vector & new_d_U ) [virtual]`

Method for adapting the variable bounds.

This is called if slacks are becoming too small

Implements [Ipopt::IpoptNLP](#).

3.142.2.4 `SmartPtr<const Vector> Ipopt::RestolpoptNLP::DR_x ( ) const [inline]`

Method returning the scaling factors for the 2-norm penalization term.

Definition at line 287 of file IpRestolpoptNLP.hpp.

3.142.2.5 `static void Ipopt::RestolpoptNLP::RegisterOptions ( SmartPtr<RegisteredOptions> options ) [static]`

Methods for IpoptType.

Called by IpoptType to register the options

The documentation for this class was generated from the following file:


- IpRestolpoptNLP.hpp

3.143 Ipopt::RestolterateInitializer Class Reference

Class implementing the default initialization procedure (based on user options) for the iterates.

```
#include <IpRestoIterateInitializer.hpp>
```

Inheritance diagram for Ipopt::RestolterateInitializer:

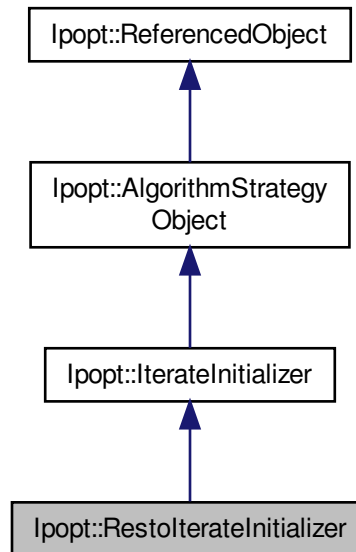

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [SetInitialIterates](#) ()
Compute the initial iterates and set the into the curr field of the ip_data object.

Constructors/Destructors

- [RestolterateInitializer](#) (const [SmartPtr](#)< [EqMultiplierCalculator](#) > &eq_mult_calculator)
Constructor.
- virtual [~RestolterateInitializer](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members

3.143.1 Detailed Description

Class implementing the default initialization procedure (based on user options) for the iterates.

It is used at the very beginning of the optimization for determine the starting point for all variables.

Definition at line 22 of file IpRestolterateInitializer.hpp.

3.143.2 Constructor & Destructor Documentation

3.143.2.1 `Ipopt::RestolterateInitializer::RestolterateInitializer ( const SmartPtr< EqMultiplierCalculator > & eq_mult_calculator )`

Constructor.

If eq_mult_calculator is not NULL, it will be used to compute the initial values for equality constraint multipliers.

3.143.3 Member Function Documentation

3.143.3.1 `virtual bool Ipopt::RestolterateInitializer::SetInitialIterates ( ) [virtual]`

Compute the initial iterates and set the into the curr field of the ip_data object.

Implements [Ipopt::IterateInitializer](#).

The documentation for this class was generated from the following file:


- IpRestolterateInitializer.hpp

3.144 Ipopt::RestolterationOutput Class Reference

Class for the iteration summary output for the restoration phase.

```
#include <IpRestoIterationOutput.hpp>
```

Inheritance diagram for Ipopt::RestoIterationOutput:

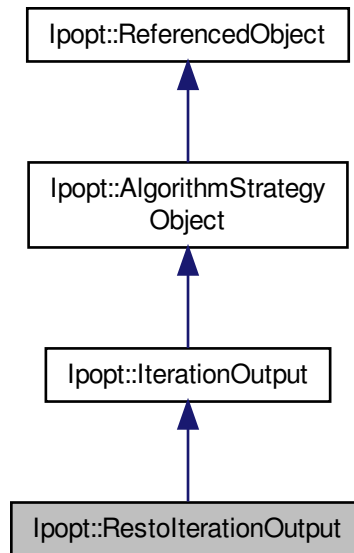

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual void [WriteOutput](#) ()
Method to do all the summary output per iteration.

Constructors/Destructors

- [RestoIterationOutput](#) (const [SmartPtr](#)< [OrigIterationOutput](#) > &resto_orig_iteration_output)
Constructor.
- virtual [~RestoIterationOutput](#) ()
Default destructor.

Additional Inherited Members

3.144.1 Detailed Description

Class for the iteration summary output for the restoration phase.

This prints information for the ORIGINAL [NLP](#) (and possibly for the restoration phase [NLP](#)).

Definition at line 22 of file `IpRestoIterationOutput.hpp`.

3.144.2 Constructor & Destructor Documentation

3.144.2.1 Ipopt::RestoIterationOutput::RestoIterationOutput (const SmartPtr< OrigIterationOutput > & *resto_orig_iteration_output*)

Constructor.

If *resto_orig_iteration_output* is not NULL, the output will be done twice per iteration, first for the restoration phase problem, and secondly using the functions for the original [NLP](#).

3.144.3 Member Function Documentation

3.144.3.1 virtual void Ipopt::RestoIterationOutput::WriteOutput () [virtual]

Method to do all the summary output per iteration.

This include the one-line summary output as well as writing the details about the iterates if desired

Implements [Ipopt::IterationOutput](#).

The documentation for this class was generated from the following file:


- IpRestoIterationOutput.hpp

3.145 Ipopt::RestoPenaltyConvergenceCheck Class Reference

This is the implementation of the restoration convergence check is the original algorithm used the filter globalization mechanism.

```
#include <IpRestoPenaltyConvCheck.hpp>
```

Inheritance diagram for Ipopt::RestoPenaltyConvergenceCheck:

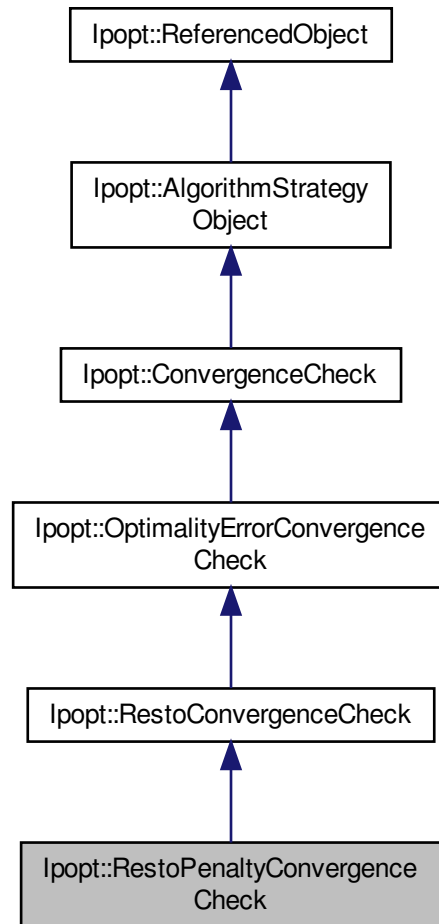

Public Member Functions

- void [SetOrigLSAcceptor](#) (const [BacktrackingLSAcceptor](#) &orig_ls_acceptor)
Set the object for the original penalty line search.
- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)

Constructors/Destructors

- [RestoPenaltyConvergenceCheck](#) ()
Default Constructor.
- virtual [~RestoPenaltyConvergenceCheck](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)

Methods used by IpoptType.

Additional Inherited Members

3.145.1 Detailed Description

This is the implementation of the restoration convergence check is the original algorithm used the filter globalization mechanism.

Definition at line 23 of file IpRestoPenaltyConvCheck.hpp.

3.145.2 Member Function Documentation

3.145.2.1 void Ipopt::RestoPenaltyConvergenceCheck::SetOrigLSAcceptor (const BacktrackingLSAcceptor & orig_ls_acceptor) [virtual]

Set the object for the original penalty line search.

Here, orig_penalty_ls_acceptor must be the same strategy object to which the restoration phase object with this object is given. This method must be called to finish the definition of the algorithm, before Initialize is called.

Implements [Ipopt::RestoConvergenceCheck](#).

The documentation for this class was generated from the following file:


- IpRestoPenaltyConvCheck.hpp

3.146 Ipopt::RestorationPhase Class Reference

Base class for different restoration phases.

```
#include <IpRestoPhase.hpp>
```

Inheritance diagram for Ipopt::RestorationPhase:

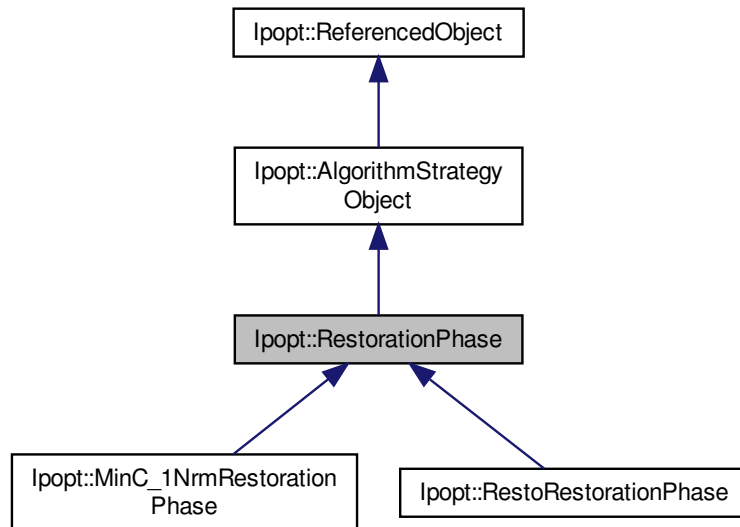

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [PerformRestoration](#) ()=0
Method called to perform restoration for the filter line search method.

Constructors/Destructors

- [RestorationPhase](#) ()
Default Constructor.
- virtual [~RestorationPhase](#) ()
Default Destructor.

Additional Inherited Members

3.146.1 Detailed Description

Base class for different restoration phases.

The restoration phase is part of the FilterLineSearch.

Definition at line 34 of file IpRestoPhase.hpp.

3.146.2 Member Function Documentation

3.146.2.1 virtual bool Ipopt::RestorationPhase::PerformRestoration () [pure virtual]

Method called to perform restoration for the filter line search method.

Implemented in [Ipopt::MinC_1NrmRestorationPhase](#), and [Ipopt::RestoRestorationPhase](#).

The documentation for this class was generated from the following file:


- IpRestoPhase.hpp

3.147 Ipopt::RestoRestorationPhase Class Reference

Recursive Restoration Phase for the.MinC_1NrmRestorationPhase.

```
#include <IpRestoRestoPhase.hpp>
```

Inheritance diagram for Ipopt::RestoRestorationPhase:

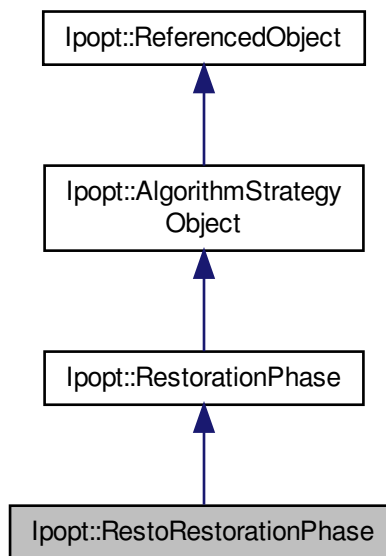

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
Overloaded from AlgorithmStrategy case class.

Constructors/Destructors

- [RestoRestorationPhase](#) ()

Default Constructor.

- virtual [~RestoRestorationPhase](#) ()

Default destructor.

Protected Member Functions

- virtual bool [PerformRestoration](#) ()

Overloaded method from [RestorationPhase](#).

3.147.1 Detailed Description

Recursive Restoration Phase for the [MinC_1NrmRestorationPhase](#).

This procedure chooses the n and p variables in the [MinC_1NrmRestorationPhase](#) problem formulation by treating the problem as separable (assuming that the x and s variables are fixed).

Definition at line 25 of file [IpRestoRestoPhase.hpp](#).

3.147.2 Constructor & Destructor Documentation

3.147.2.1 Ipopt::RestoRestorationPhase::RestoRestorationPhase ()

Default Constructor.

3.147.3 Member Function Documentation

3.147.3.1 virtual bool Ipopt::RestoRestorationPhase::PerformRestoration () [protected], [virtual]

Overloaded method from [RestorationPhase](#).

Implements [Ipopt::RestorationPhase](#).

The documentation for this class was generated from the following file:


- [IpRestoRestoPhase.hpp](#)

3.148 Ipopt::ScaledMatrix Class Reference

Class for a [Matrix](#) in conjunction with its scaling factors for row and column scaling.

```
#include <IpScaledMatrix.hpp>
```

Inheritance diagram for Ipopt::ScaledMatrix:

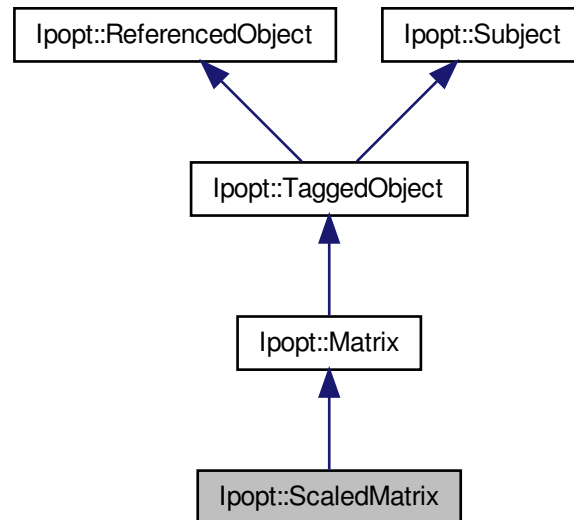

Public Member Functions

- void [SetUnscaledMatrix](#) (const [SmartPtr](#)< const [Matrix](#) > unscaled_matrix)
Set the unscaled matrix.
- void [SetUnscaledMatrixNonConst](#) (const [SmartPtr](#)< [Matrix](#) > &unscaled_matrix)
Set the unscaled matrix in a non-const version.
- [SmartPtr](#)< const [Matrix](#) > [GetUnscaledMatrix](#) () const
Return the unscaled matrix in const form.
- [SmartPtr](#)< [Matrix](#) > [GetUnscaledMatrixNonConst](#) ()
Return the unscaled matrix in non-const form.
- [SmartPtr](#)< const [Vector](#) > [RowScaling](#) () const
return the vector for the row scaling
- [SmartPtr](#)< const [Vector](#) > [ColumnScaling](#) () const
return the vector for the column scaling

Constructors / Destructors

- [ScaledMatrix](#) (const [ScaledMatrixSpace](#) *owner_space)
Constructor, taking the owner_space.
- [~ScaledMatrix](#) ()
Destructor.

Protected Member Functions

Methods overloaded from Matrix

- virtual void [MultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix-vector multiply.
- virtual void [TransMultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix(transpose) vector multiply.
- virtual bool [IsValidNumbersImpl](#) () const
Method for determining if all stored numbers are valid (i.e., no Inf or Nan).
- virtual void [ComputeRowAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const
Compute the max-norm of the rows in the matrix.
- virtual void [ComputeColAMaxImpl](#) ([Vector](#) &cols_norms, bool init) const
Compute the max-norm of the columns in the matrix.
- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
Print detailed information about the matrix.
- virtual void [AddMSinvZImpl](#) (Number alpha, const [Vector](#) &S, const [Vector](#) &Z, [Vector](#) &X) const
$$X = \text{beta} * X + \text{alpha} * (\text{Matrix } S^{-1} \{ -1 \} Z).$$
- virtual void [SinvBlrmZMTdBrlImpl](#) (Number alpha, const [Vector](#) &S, const [Vector](#) &R, const [Vector](#) &Z, const [Vector](#) &D, [Vector](#) &X) const
$$X = S^{-1} \{ -1 \} (r + \text{alpha} * Z * M^T D).$$

Additional Inherited Members

3.148.1 Detailed Description

Class for a [Matrix](#) in conjunction with its scaling factors for row and column scaling.

Operations on the matrix are performed using the scaled matrix. You can pull out the pointer to the unscaled matrix for unscaled calculations.

Definition at line 26 of file IpScaledMatrix.hpp.

3.148.2 Member Function Documentation

3.148.2.1 virtual void Ipopt::ScaledMatrix::MultVectorImpl (Number *alpha*, const [Vector](#) & *x*, Number *beta*, [Vector](#) & *y*) const
[protected], [virtual]

Matrix-vector multiply.

Computes $y = \text{alpha} * \text{Matrix} * x + \text{beta} * y$

Implements [Ipopt::Matrix](#).

3.148.2.2 virtual void Ipopt::ScaledMatrix::TransMultVectorImpl (Number *alpha*, const [Vector](#) & *x*, Number *beta*, [Vector](#) & *y*) const
const [protected], [virtual]

Matrix(transpose) vector multiply.

Computes $y = \text{alpha} * \text{Matrix}^T * x + \text{beta} * y$

Implements [Ipopt::Matrix](#).

3.148.2.3 `virtual bool Ipopt::ScaledMatrix::IsValidNumbersImpl ( ) const` [protected], [virtual]

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

It is assumed that the scaling factors are valid.

Reimplemented from [Ipopt::Matrix](#).

3.148.2.4 `virtual void Ipopt::ScaledMatrix::ComputeRowAMaxImpl ( Vector & rows_norms, bool init ) const` [protected], [virtual]

Compute the max-norm of the rows in the matrix.

The result is stored in `rows_norms`. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.148.2.5 `virtual void Ipopt::ScaledMatrix::ComputeColAMaxImpl ( Vector & cols_norms, bool init ) const` [protected], [virtual]

Compute the max-norm of the columns in the matrix.

The result is stored in `cols_norms`. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.148.2.6 `virtual void Ipopt::ScaledMatrix::PrintImpl ( const Journalist & jnlst, EJournalLevel level, EJournalCategory category, const std::string & name, Index indent, const std::string & prefix ) const` [protected], [virtual]

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

3.148.2.7 `virtual void Ipopt::ScaledMatrix::AddMSinvZImpl ( Number alpha, const Vector & S, const Vector & Z, Vector & X ) const` [protected], [virtual]

$X = \beta X + \alpha (S^{-1} Z)$.

Specialized implementation missing so far!

Reimplemented from [Ipopt::Matrix](#).

3.148.2.8 `virtual void Ipopt::ScaledMatrix::SinvBlrmZMTdBrImpl ( Number alpha, const Vector & S, const Vector & R, const Vector & Z, const Vector & D, Vector & X ) const` [protected], [virtual]

$X = S^{-1} (r + \alpha Z M^T D)$.

Specialized implementation missing so far!

Reimplemented from [Ipopt::Matrix](#).

The documentation for this class was generated from the following file:


- IpScaledMatrix.hpp

3.149 Ipopt::ScaledMatrixSpace Class Reference

This is the matrix space for [ScaledMatrix](#).

```
#include <IpScaledMatrix.hpp>
```

Inheritance diagram for Ipopt::ScaledMatrixSpace:

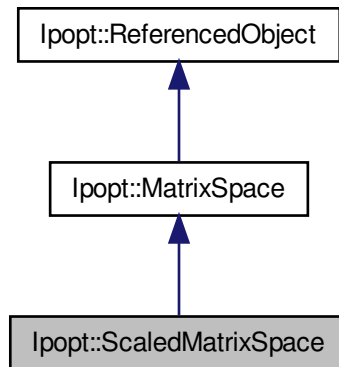

Public Member Functions

- [ScaledMatrix](#) * [MakeNewScaledMatrix](#) (bool allocate_unscaled_matrix=false) const
Method for creating a new matrix of this specific type.
- virtual [Matrix](#) * [MakeNew](#) () const
Overloaded MakeNew method for the [MatrixSpace](#) base class.
- [SmartPtr](#)< const [Vector](#) > [RowScaling](#) () const
return the vector for the row scaling
- [SmartPtr](#)< const [MatrixSpace](#) > [UnscaledMatrixSpace](#) () const
return the matrix space for the unscaled matrix
- [SmartPtr](#)< const [Vector](#) > [ColumnScaling](#) () const
return the vector for the column scaling

Constructors / Destructors

- [ScaledMatrixSpace](#) (const [SmartPtr](#)< const [Vector](#) > &row_scaling, bool row_scaling_reciprocal, const [SmartPtr](#)< const [MatrixSpace](#) > &unscaled_matrix_space, const [SmartPtr](#)< const [Vector](#) > &column_scaling, bool column_scaling_reciprocal)
Constructor, given the number of row and columns blocks, as well as the total number of rows and columns.
- [~ScaledMatrixSpace](#) ()
Destructor.

3.149.1 Detailed Description

This is the matrix space for [ScaledMatrix](#).

Definition at line 128 of file IpScaledMatrix.hpp.

3.149.2 Member Function Documentation

3.149.2.1 ScaledMatrix* Ipopt::ScaledMatrixSpace::MakeNewScaledMatrix (bool allocate_unscaled_matrix = false) const [inline]

Method for creating a new matrix of this specific type.

Definition at line 148 of file IpScaledMatrix.hpp.

The documentation for this class was generated from the following file:


- IpScaledMatrix.hpp

3.150 Ipopt::SearchDirectionCalculator Class Reference

Base class for computing the search direction for the line search.

```
#include <IpSearchDirCalculator.hpp>
```

Inheritance diagram for Ipopt::SearchDirectionCalculator:



Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [ComputeSearchDirection](#) ()=0
Pure virtual method for computing the search direction.

Constructors/Destructors

- [SearchDirectionCalculator](#) ()
Constructor.
- virtual [~SearchDirectionCalculator](#) ()
Default destructor.

Additional Inherited Members

3.150.1 Detailed Description

Base class for computing the search direction for the line search.

Definition at line 20 of file IpSearchDirCalculator.hpp.

3.150.2 Member Function Documentation

3.150.2.1 virtual bool Ipopt::SearchDirectionCalculator::ComputeSearchDirection () [pure virtual]

Pure virtual method for computing the search direction.

The computed direction is stored in IpData().delta().

Implemented in [Ipopt::InexactSearchDirCalculator](#), [Ipopt::CGSearchDirCalculator](#), and [Ipopt::PDSearchDirCalculator](#).

The documentation for this class was generated from the following file:


- IpSearchDirCalculator.hpp

3.151 Ipopt::SlackBasedTSymScalingMethod Class Reference

Class for the method for computing scaling factors for symmetric matrices in triplet format, specifically for the inexact algorithm.

```
#include <IpSlackBasedTSymScalingMethod.hpp>
```

Inheritance diagram for Ipopt::SlackBasedTSymScalingMethod:

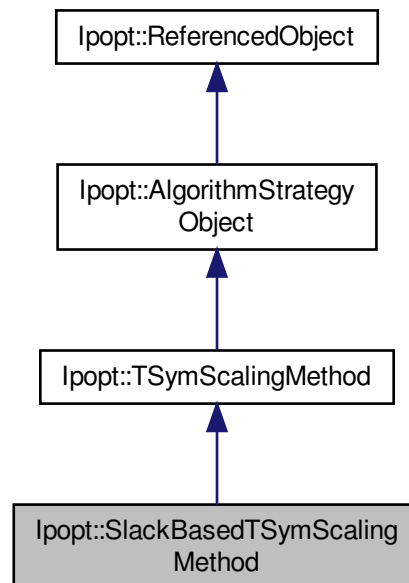

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)

- virtual bool [ComputeSymTScalingFactors](#) (Index *n*, Index *nnz*, const ipfint **airn*, const ipfint **ajcn*, const double **a*, double **scaling_factors*)

Method for computing the symmetric scaling factors, given the symmetric matrix in triplet (MA27) format.

Constructor/Destructor

- [SlackBasedTSymScalingMethod](#) ()
- virtual ~[SlackBasedTSymScalingMethod](#) ()

Additional Inherited Members

3.151.1 Detailed Description

Class for the method for computing scaling factors for symmetric matrices in triplet format, specifically for the inexact algorithm.

The scaling is only considering the current slacks.

Definition at line 23 of file IpSlackBasedTSymScalingMethod.hpp.

3.151.2 Member Function Documentation

- 3.151.2.1 virtual bool Ipopt::SlackBasedTSymScalingMethod::ComputeSymTScalingFactors (Index *n*, Index *nnz*, const ipfint **airn*, const ipfint **ajcn*, const double **a*, double **scaling_factors*) [virtual]

Method for computing the symmetric scaling factors, given the symmetric matrix in triplet (MA27) format.

The documentation for this class was generated from the following file:

- IpSlackBasedTSymScalingMethod.hpp

3.152 Ipopt::SmartPtr< T > Class Template Reference

Template class for Smart Pointers.

#include <IpSmartPtr.hpp>

Inherits [Ipopt::Referencer](#).

Public Member Functions

Constructors/Destructors

- [SmartPtr](#) ()
Default constructor, initialized to NULL.
- [SmartPtr](#) (const [SmartPtr](#)< T > ©)
Copy constructor, initialized from copy of type T.
- template<class U >
[SmartPtr](#) (const [SmartPtr](#)< U > ©)
Copy constructor, initialized from copy of type U.
- [SmartPtr](#) (T *ptr)
Constructor, initialized from T ptr.*
- ~[SmartPtr](#) ()
Destructor, automatically decrements the reference count, deletes the object if necessary.

Friends

friend method declarations.

- template<class U >
U * [GetRawPtr](#) (const [SmartPtr](#)< U > &smart_ptr)
Returns the raw pointer contained.
- template<class U >
[SmartPtr](#)< const U > [ConstPtr](#) (const [SmartPtr](#)< U > &smart_ptr)
Returns a const pointer.
- template<class U >
bool [IsValid](#) (const [SmartPtr](#)< U > &smart_ptr)
Returns true if the [SmartPtr](#) is NOT NULL.
- template<class U >
bool [IsNull](#) (const [SmartPtr](#)< U > &smart_ptr)
Returns true if the [SmartPtr](#) is NULL.

Overloaded operators.

- T * [operator->](#) () const
Overloaded arrow operator, allows the user to call methods using the contained pointer.
- T & [operator*](#) () const
Overloaded dereference operator, allows the user to dereference the contained pointer.
- [SmartPtr](#)< T > & [operator=](#) (T *rhs)
Overloaded equals operator, allows the user to set the value of the [SmartPtr](#) from a raw pointer.
- [SmartPtr](#)< T > & [operator=](#) (const [SmartPtr](#)< T > &rhs)
Overloaded equals operator, allows the user to set the value of the [SmartPtr](#) from another [SmartPtr](#).
- template<class U >
[SmartPtr](#)< T > & [operator=](#) (const [SmartPtr](#)< U > &rhs)
Overloaded equals operator, allows the user to set the value of the [SmartPtr](#) from another [SmartPtr](#) of a different type.
- template<class U1 , class U2 >
bool [operator==](#) (const [SmartPtr](#)< U1 > &lhs, const [SmartPtr](#)< U2 > &rhs)
Overloaded equality comparison operator, allows the user to compare the value of two [SmartPtr](#)s.
- template<class U1 , class U2 >
bool [operator==](#) (const [SmartPtr](#)< U1 > &lhs, U2 *raw_rhs)
Overloaded equality comparison operator, allows the user to compare the value of a [SmartPtr](#) with a raw pointer.
- template<class U1 , class U2 >
bool [operator==](#) (U1 *lhs, const [SmartPtr](#)< U2 > &raw_rhs)
Overloaded equality comparison operator, allows the user to compare the value of a raw pointer with a [SmartPtr](#).
- template<class U1 , class U2 >
bool [operator!=](#) (const [SmartPtr](#)< U1 > &lhs, const [SmartPtr](#)< U2 > &rhs)
Overloaded in-equality comparison operator, allows the user to compare the value of two [SmartPtr](#)s.
- template<class U1 , class U2 >
bool [operator!=](#) (const [SmartPtr](#)< U1 > &lhs, U2 *raw_rhs)
Overloaded in-equality comparison operator, allows the user to compare the value of a [SmartPtr](#) with a raw pointer.
- template<class U1 , class U2 >
bool [operator!=](#) (U1 *lhs, const [SmartPtr](#)< U2 > &raw_rhs)
Overloaded in-equality comparison operator, allows the user to compare the value of a [SmartPtr](#) with a raw pointer.
- template<class U >
bool [operator<](#) (const [SmartPtr](#)< U > &lhs, const [SmartPtr](#)< U > &rhs)
Overloaded less-than comparison operator, allows the user to compare the value of two [SmartPtr](#)s.

3.152.1 Detailed Description

`template<class T>class Ipopt::SmartPtr< T >`

Template class for Smart Pointers.

A [SmartPtr](#) behaves much like a raw pointer, but manages the lifetime of an object, deleting the object automatically. This class implements a reference-counting, intrusive smart pointer design, where all objects pointed to must inherit off of [ReferencedObject](#), which stores the reference count. Although this is intrusive (native types and externally authored classes require wrappers to be referenced by smart pointers), it is a safer design. A more detailed discussion of these issues follows after the usage information.

Usage Example: Note: to use the [SmartPtr](#), all objects to which you point MUST inherit off of [ReferencedObject](#).

```
*
* In MyClass.hpp...
*
* #include "IpReferenced.hpp"

* namespace Ipopt {
*
*   class MyClass : public ReferencedObject // must derive from ReferencedObject
*   {
*       ...
*   }
* } // namespace Ipopt
*
*
* In my_usage.cpp...
*
* #include "IpSmartPtr.hpp"
* #include "MyClass.hpp"
*
* void func(AnyObject& obj)
* {
*     SmartPtr<MyClass> ptr_to_myclass = new MyClass(...);
*     // ptr_to_myclass now points to a new MyClass,
*     // and the reference count is 1
*
*     ...
*
*     obj.SetMyClass(ptr_to_myclass);
*     // Here, let's assume that AnyObject uses a
*     // SmartPtr<MyClass> internally here.
*     // Now, both ptr_to_myclass and the internal
*     // SmartPtr in obj point to the same MyClass object
*     // and its reference count is 2.
*
*     ...
*
*     // No need to delete ptr_to_myclass, this
*     // will be done automatically when the
*     // reference count drops to zero.
*
* }
```

It is not necessary to use [SmartPtr](#)'s in all cases where an object is used that has been allocated "into" a [SmartPtr](#). It is possible to just pass objects by reference or regular pointers, even if lower down in the stack a [SmartPtr](#) is to be held on to. Everything should work fine as long as a pointer created by "new" is immediately passed into a [SmartPtr](#), and if [SmartPtr](#)'s are used to hold on to objects.

Other Notes: The [SmartPtr](#) implements both dereference operators `->` & `*`. The [SmartPtr](#) does NOT implement a conversion operator to the raw pointer. Use the [GetRawPtr\(\)](#) method when this is necessary. Make sure that the raw

pointer is NOT deleted. The `SmartPtr` implements the comparison operators `==` & `!=` for a variety of types. Use these instead of

```
*   if (GetRawPtr(smrt_ptr) == ptr) // Don't use this
*
```

`SmartPtr`'s, as currently implemented, do NOT handle circular references. For example: consider a higher level object using `SmartPtr`s to point to A and B, but A and B also point to each other (i.e. A has a `SmartPtr` to B and B has a `SmartPtr` to A). In this scenario, when the higher level object is finished with A and B, their reference counts will never drop to zero (since they reference each other) and they will not be deleted. This can be detected by memory leak tools like `valgrind`. If the circular reference is necessary, the problem can be overcome by a number of techniques:

1) A and B can have a method that "releases" each other, that is they set their internal `SmartPtr`s to NULL.

```
*   void AClass::ReleaseCircularReferences()
*   {
*       smart_ptr_to_B = NULL;
*   }
*
```

Then, the higher level class can call these methods before it is done using A & B.

2) Raw pointers can be used in A and B to reference each other. Here, an implicit assumption is made that the lifetime is controlled by the higher level object and that A and B will both exist in a controlled manner. Although this seems dangerous, in many situations, this type of referencing is very controlled and this is reasonably safe.

3) This `SmartPtr` class could be redesigned with the Weak/Strong design concept. Here, the `SmartPtr` is identified as being Strong (controls lifetime of the object) or Weak (merely referencing the object). The Strong `SmartPtr` increments (and decrements) the reference count in `ReferencedObject` but the Weak `SmartPtr` does not. In the example above, the higher level object would have Strong `SmartPtr`s to A and B, but A and B would have Weak `SmartPtr`s to each other. Then, when the higher level object was done with A and B, they would be deleted. The Weak `SmartPtr`s in A and B would not decrement the reference count and would, of course, not delete the object. This idea is very similar to item (2), where it is implied that the sequence of events is controlled such that A and B will not call anything using their pointers following the higher level delete (i.e. in their destructors!). This is somehow safer, however, because code can be written (however expensive) to perform run-time detection of this situation. For example, the `ReferencedObject` could store pointers to all Weak `SmartPtr`s that are referencing it and, in its destructor, tell these pointers that it is dying. They could then set themselves to NULL, or set an internal flag to detect usage past this point.

Comments on Non-Intrusive Design: In a non-intrusive design, the reference count is stored somewhere other than the object being referenced. This means, unless the reference counting pointer is the first referencer, it must get a pointer to the referenced object from another smart pointer (so it has access to the reference count location). In this non-intrusive design, if we are pointing to an object with a smart pointer (or a number of smart pointers), and we then give another smart pointer the address through a RAW pointer, we will have two independent, AND INCORRECT, reference counts. To avoid this pitfall, we use an intrusive reference counting technique where the reference count is stored in the object being referenced.

Definition at line 172 of file `IpSmartPtr.hpp`.

3.152.2 Constructor & Destructor Documentation

3.152.2.1 `template<class T> Ipopt::SmartPtr< T >::~~SmartPtr ( )`

Destructor, automatically decrements the reference count, deletes the object if necessary.

Definition at line 428 of file `IpSmartPtr.hpp`.

3.152.3 Member Function Documentation

3.152.3.1 `template<class T> T * Ipopt::SmartPtr< T >::operator-> ( ) const`

Overloaded arrow operator, allows the user to call methods using the contained pointer.

Definition at line 439 of file IpSmartPtr.hpp.

3.152.3.2 `template<class T> T & Ipopt::SmartPtr< T >::operator*( ) const`

Overloaded dereference operator, allows the user to dereference the contained pointer.

Definition at line 455 of file IpSmartPtr.hpp.

3.152.4 Friends And Related Function Documentation

3.152.4.1 `template<class T> template<class U1 , class U2 > bool operator==( const SmartPtr< U1 > & lhs, U2 * raw_rhs ) [friend]`

Overloaded equality comparison operator, allows the user to compare the value of a [SmartPtr](#) with a raw pointer.

3.152.4.2 `template<class T> template<class U1 , class U2 > bool operator==( U1 * lhs, const SmartPtr< U2 > & raw_rhs ) [friend]`

Overloaded equality comparison operator, allows the user to compare the value of a raw pointer with a [SmartPtr](#).

3.152.4.3 `template<class T> template<class U1 , class U2 > bool operator!=( const SmartPtr< U1 > & lhs, U2 * raw_rhs ) [friend]`

Overloaded in-equality comparison operator, allows the user to compare the value of a [SmartPtr](#) with a raw pointer.

3.152.4.4 `template<class T> template<class U1 , class U2 > bool operator!=( U1 * lhs, const SmartPtr< U2 > & raw_rhs ) [friend]`

Overloaded in-equality comparison operator, allows the user to compare the value of a [SmartPtr](#) with a raw pointer.

3.152.4.5 `template<class T> template<class U> U* GetRawPtr ( const SmartPtr< U > & smart_ptr ) [friend]`

Returns the raw pointer contained.

Use to get the value of the raw ptr (i.e. to pass to other methods/functions, etc.) Note: This method does NOT copy, therefore, modifications using this value modify the underlying object contained by the [SmartPtr](#), NEVER delete this returned value.

3.152.4.6 `template<class T> template<class U> bool IsValid ( const SmartPtr< U > & smart_ptr ) [friend]`

Returns true if the [SmartPtr](#) is NOT NULL.

Use this to check if the [SmartPtr](#) is not null This is preferred to `if(GetRawPtr(sp) != NULL)`

3.152.4.7 `template<class T> template<class U> bool IsNull ( const SmartPtr< U > & smart_ptr ) [friend]`

Returns true if the [SmartPtr](#) is NULL.

Use this to check if the [SmartPtr](#) IsNull. This is preferred to `if(GetRawPtr(sp) == NULL)`

The documentation for this class was generated from the following file:


- IpSmartPtr.hpp

3.153 Ipopt::SolveStatistics Class Reference

This class collects statistics about an optimization run, such as iteration count, final infeasibilities etc.

```
#include <IpSolveStatistics.hpp>
```

Inheritance diagram for Ipopt::SolveStatistics:



Public Member Functions

Constructors/Destructors

- `SolveStatistics` (const `SmartPtr< IpoptNLP >` &ip_nlp, const `SmartPtr< IpoptData >` &ip_data, const `SmartPtr< IpoptCalculatedQuantities >` &ip_cq)
Default constructor.
- virtual `~SolveStatistics` ()
Default destructor.

Accessor methods for retrieving different kind of solver

statistics information

- virtual Index `IterationCount` () const
Iteration counts.
- virtual Number `TotalCpuTime` () const
Total CPU time, including function evaluations.
- Number `TotalCPUTime` () const
Total CPU time, including function evaluations.
- virtual Number `TotalSysTime` () const
Total System time, including function evaluations.
- virtual Number `TotalWallclockTime` () const
Total wall clock time, including function evaluations.
- virtual void `NumberOfEvaluations` (Index &num_obj_evals, Index &num_constr_evals, Index &num_obj_grad_evals, Index &num_constr_jac_evals, Index &num_hess_evals) const
Number of NLP function evaluations.
- virtual void `Infeasibilities` (Number &dual_inf, Number &constr_viol, Number &complementarity, Number &kkt_error) const
Unscaled solution infeasibilities.
- virtual void `ScaledInfeasibilities` (Number &scaled_dual_inf, Number &scaled_constr_viol, Number &scaled_complementarity, Number &scaled_kkt_error) const

- *Scaled solution infeasibilities.*
virtual Number [FinalObjective](#) () const
Final value of objective function.
- virtual Number [FinalScaledObjective](#) () const
Final scaled value of objective function.

3.153.1 Detailed Description

This class collects statistics about an optimization run, such as iteration count, final infeasibilities etc.

It is meant to provide such information to a user of Ipopt during the `finalize_solution` call.

Definition at line 27 of file `IpSolveStatistics.hpp`.

3.153.2 Constructor & Destructor Documentation

3.153.2.1 `Ipopt::SolveStatistics::SolveStatistics ( const SmartPtr< IpoptNLP > & ip_nlp, const SmartPtr< IpoptData > & ip_data, const SmartPtr< IpoptCalculatedQuantities > & ip_cq )`

Default constructor.

It takes in those collecting Ipopt objects that can provide the statistics information. Those statistics are retrieved at the time of the constructor call.

3.153.3 Member Function Documentation

3.153.3.1 `virtual Index Ipopt::SolveStatistics::IterationCount ( ) const [virtual]`

Iteration counts.

3.153.3.2 `virtual Number Ipopt::SolveStatistics::TotalCpuTime ( ) const [virtual]`

Total CPU time, including function evaluations.

3.153.3.3 `Number Ipopt::SolveStatistics::TotalCPUTime ( ) const [inline]`

Total CPU time, including function evaluations.

Included for backward compatibility.

Definition at line 54 of file `IpSolveStatistics.hpp`.

3.153.3.4 `virtual Number Ipopt::SolveStatistics::TotalSysTime ( ) const [virtual]`

Total System time, including function evaluations.

3.153.3.5 `virtual Number Ipopt::SolveStatistics::TotalWallclockTime ( ) const [virtual]`

Total wall clock time, including function evaluations.

3.153.3.6 `virtual void Ipopt::SolveStatistics::NumberOfEvaluations ( Index & num_obj_evals, Index & num_constr_evals, Index & num_obj_grad_evals, Index & num_constr_jac_evals, Index & num_hess_evals ) const [virtual]`

Number of [NLP](#) function evaluations.

The documentation for this class was generated from the following file:


- IpSolveStatistics.hpp

3.154 Ipopt::SparseSymLinearSolverInterface Class Reference

Base class for interfaces to symmetric indefinite linear solvers for sparse matrices.

```
#include <IpSparseSymLinearSolverInterface.hpp>
```

Inheritance diagram for Ipopt::SparseSymLinearSolverInterface:

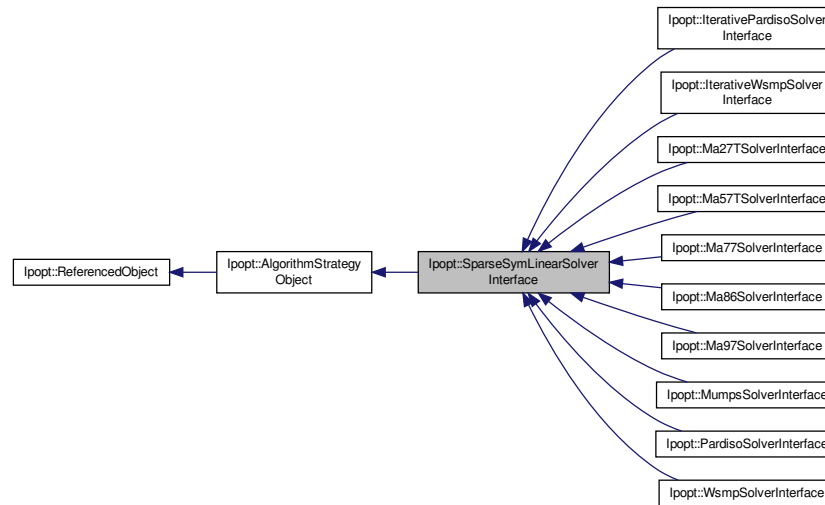

Public Types

- enum [EMatrixFormat](#) {
[Triplet_Format](#), [CSR_Format_0_Offset](#), [CSR_Format_1_Offset](#), [CSR_Full_Format_0_Offset](#),
[CSR_Full_Format_1_Offset](#) }
Enum to specify sparse matrix format.

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
overloaded from [AlgorithmStrategyObject](#)

Constructor/Destructor

- [SparseSymLinearSolverInterface](#) ()
- virtual ~[SparseSymLinearSolverInterface](#) ()

Methods for requesting solution of the linear system.

- virtual [ESymSolverStatus](#) [InitializeStructure](#) (Index dim, Index nonzeros, const Index *ia, const Index *ja)=0
Method for initializing internal structures.
- virtual double * [GetValuesArrayPtr](#) ()=0

Method returning an internal array into which the nonzero elements (in the same order as ja) will be stored by the calling routine before a call to MultiSolve with a new_matrix=true (or after a return of MultiSolve with SYMSOLV_CALL_AGA-IN).

- virtual ESymSolverStatus [MultiSolve](#) (bool new_matrix, const Index *ia, const Index *ja, Index nrhs, double *rhs_vals, bool check_NegEVals, Index numberOfNegEVals)=0

Solve operation for multiple right hand sides.

- virtual Index [NumberOfNegEVals](#) () const =0

Number of negative eigenvalues detected during last factorization.

- virtual bool [IncreaseQuality](#) ()=0

Request to increase quality of solution for next solve.

- virtual bool [ProvidesInertia](#) () const =0

Query whether inertia is computed by linear solver.

- virtual [EMatrixFormat](#) [MatrixFormat](#) () const =0

Query of requested matrix type that the linear solver understands.

Methods related to the detection of linearly dependent

rows in a matrix

- virtual bool [ProvidesDegeneracyDetection](#) () const

Query whether the indices of linearly dependent rows/columns can be determined by this linear solver.

- virtual ESymSolverStatus [DetermineDependentRows](#) (const Index *ia, const Index *ja, std::list< Index > &c_deps)

This method determines the list of row indices of the linearly dependent rows.

Additional Inherited Members

3.154.1 Detailed Description

Base class for interfaces to symmetric indefinite linear solvers for sparse matrices.

This defines the general interface to linear solvers for sparse symmetric indefinite matrices. The matrices can be provided either in "triplet format" (like for Harwell's MA27 solver), or in compressed sparse row (CSR) format for the lower triangular part of the symmetric matrix.

The solver should be able to compute the inertia of the matrix, or more specifically, the number of negative eigenvalues in the factorized matrix.

This interface is used by the calling objective in the following way:

1. The InitializeImpl method is called at the very beginning (for every optimization run), which allows the linear solver object to retrieve options given in the [OptionsList](#) (such as pivot tolerances etc). At this point, some internal data can also be initialized.
1. The calling class calls [MatrixFormat](#) to find out which matrix representation the linear solver requires. The possible options are [Triplet_Format](#), as well as [CSR_Format_0_Offset](#) and [CSR_Format_1_Offset](#). The difference between the last two is that for [CSR_Format_0_Offset](#) the counting of the element position in the ia and ja arrays starts are 0 (C-style numbering), whereas for the other one it starts at 1 (Fortran-style numbering).
1. After this, the [InitializeStructure](#) method is called (once). Here, the structure of the matrix is provided. If the linear solver requires a symbolic preprocessing phase that can be done without knowledge of the matrix element values, it can be done here.

1. The calling class will request an array for storing the actual values for a matrix using the `GetValuesArrayPtr` method. This array must be at least as large as the number of nonzeros in the matrix (as given to this class by the `InitializeStructure` method call). After a call of this method, the calling class will fill this array with the actual values of the matrix.
1. Every time lateron, when actual solves of a linear system is requested, the calling class will call the `MultiSolve` to request the solve, possibly for multiple right-hand sides. The flag `new_matrix` then indicates if the values of the matrix have changed and if a factorization is required, or if an old factorization can be used to do the solve.

Note that the `GetValuesArrayPtr` method will be called before every call of `MultiSolve` with `new_matrix=true`, or before a renewed call of `MultiSolve` if the most previous return value was `SYMSOLV_CALL_AGAIN`.

1. The calling class might request with `NumberOfNegEVals` the number of the negative eigenvalues for the original matrix that were detected during the most recently performed factorization.
1. The calling class might ask the linear solver to increase the quality of the solution. For example, if the linear solver uses a pivot tolerance, a larger value should be used for the next solve (which might require a refactorization).
1. Finally, when the destructor is called, the internal storage, also in the linear solver, should be released.

Note, if the matrix is given in triplet format, entries might be listed multiple times, in which case the corresponding elements have to be added.

A note for warm starts: If the option "warm_start_same_structure" is specified with "yes", the algorithm assumes that a problem with the same sparsity structure is solved for a repeated time. In that case, the linear solver might reuse information from the previous optimization. See [Ma27TSolverInterface](#) for an example.

Definition at line 98 of file `IpSparseSymLinearSolverInterface.hpp`.

3.154.2 Member Enumeration Documentation

3.154.2.1 enum Ipopt::SparseSymLinearSolverInterface::EMatrixFormat

Enum to specify sparse matrix format.

Enumerator:

- Triplet_Format** Triplet (MA27) format.
- CSR_Format_0_Offset** Compressed sparse row format for lower triangular part, with 0 offset.
- CSR_Format_1_Offset** Compressed sparse row format for lower triangular part, with 1 offset.
- CSR_Full_Format_0_Offset** Compressed sparse row format for both lwr and upr parts, with 0 offset.
- CSR_Full_Format_1_Offset** Compressed sparse row format for both lwr and upr parts, with 1 offset.

Definition at line 102 of file `IpSparseSymLinearSolverInterface.hpp`.

3.154.3 Member Function Documentation

3.154.3.1 virtual ESymSolverStatus Ipopt::SparseSymLinearSolverInterface::InitializeStructure (Index dim, Index nonzeros, const Index * ia, const Index * ja) [pure virtual]

Method for initializing internal structures.

Here, `ndim` gives the number of rows and columns of the matrix, `nonzeros` give the number of nonzero elements, and `ia` and `ja` give the positions of the nonzero elements, given in the matrix format determined by `MatrixFormat`.

Implemented in [Ipopt::Ma97SolverInterface](#), [Ipopt::Ma86SolverInterface](#), [Ipopt::Ma77SolverInterface](#), [Ipopt::Ma57-TSolverInterface](#), [Ipopt::MumpsSolverInterface](#), [Ipopt::IterativePardisoSolverInterface](#), [Ipopt::PardisoSolverInterface](#), [Ipopt::WsmvSolverInterface](#), [Ipopt::IterativeWsmvSolverInterface](#), and [Ipopt::Ma27TSolverInterface](#).

3.154.3.2 virtual double* Ipopt::SparseSymLinearSolverInterface::GetValuesArrayPtr () [pure virtual]

Method returning an internal array into which the nonzero elements (in the same order as `ja`) will be stored by the calling routine before a call to `MultiSolve` with a `new_matrix=true` (or after a return of `MultiSolve` with `SYMSOLV_CALL_AGAIN`).

The returned array must have space for at least nonzero elements.

Implemented in [Ipopt::Ma97SolverInterface](#), [Ipopt::Ma86SolverInterface](#), [Ipopt::Ma77SolverInterface](#), [Ipopt::Ma57-TSolverInterface](#), [Ipopt::MumpsSolverInterface](#), [Ipopt::IterativePardisoSolverInterface](#), [Ipopt::Ma27TSolverInterface](#), [Ipopt::PardisoSolverInterface](#), [Ipopt::WsmvSolverInterface](#), and [Ipopt::IterativeWsmvSolverInterface](#).

3.154.3.3 virtual ESymSolverStatus Ipopt::SparseSymLinearSolverInterface::MultiSolve (bool new_matrix, const Index * ia, const Index * ja, Index nrhs, double * rhs_vals, bool check_NegEvals, Index numberOfNegEvals) [pure virtual]

Solve operation for multiple right hand sides.

Solves the linear system $A * x = b$ with multiple right hand sides, where A is the symmetric indefinite matrix. Here, `ia` and `ja` give the positions of the values (in the required matrix data format). The actual values of the matrix will have been given to this object by copying them into the array provided by `GetValuesArrayPtr`. `ia` and `ja` are identical to the ones given to `InitializeStructure`. The flag `new_matrix` is set to true, if the values of the matrix has changed, and a refactorization is required.

The return code is `SYMSOLV_SUCCESS` if the factorization and solves were successful, `SYMSOLV_SINGULAR` if the linear system is singular, and `SYMSOLV_WRONG_INERTIA` if `check_NegEvals` is true and the number of negative eigenvalues in the matrix does not match `numberOfNegEvals`. If `SYMSOLV_CALL_AGAIN` is returned, then the calling function will request the pointer for the array for storing a again (with `GetValuesPtr`), write the values of the nonzero elements into it, and call this `MultiSolve` method again with the same right-hand sides. (This can be done, for example, if the linear solver realized it does not have sufficient memory and needs to redo the factorization; e.g., for `MA27`.)

The number of right-hand sides is given by `nrhs`, the values of the right-hand sides are given in `rhs_vals` (one full right-hand side stored immediately after the other), and solutions are to be returned in the same array.

`check_NegEvals` will not be chosen true, if [ProvidesInertia\(\)](#) returns false.

Implemented in [Ipopt::Ma97SolverInterface](#), [Ipopt::Ma86SolverInterface](#), [Ipopt::Ma77SolverInterface](#), [Ipopt::Ma57-TSolverInterface](#), [Ipopt::MumpsSolverInterface](#), [Ipopt::Ma27TSolverInterface](#), [Ipopt::IterativePardisoSolverInterface](#), [Ipopt::PardisoSolverInterface](#), [Ipopt::WsmvSolverInterface](#), and [Ipopt::IterativeWsmvSolverInterface](#).

3.154.3.4 virtual Index Ipopt::SparseSymLinearSolverInterface::NumberOfNegEvals () const [pure virtual]

Number of negative eigenvalues detected during last factorization.

Returns the number of negative eigenvalues of the most recent factorized matrix. This must not be called if the linear solver does not compute this quantities (see [ProvidesInertia](#)).

Implemented in [Ipopt::Ma97SolverInterface](#), [Ipopt::Ma86SolverInterface](#), [Ipopt::Ma77SolverInterface](#), [Ipopt::Ma57-TSolverInterface](#), [Ipopt::MumpsSolverInterface](#), [Ipopt::Ma27TSolverInterface](#), [Ipopt::IterativePardisoSolverInterface](#), [Ipopt::PardisoSolverInterface](#), [Ipopt::WsmvSolverInterface](#), and [Ipopt::IterativeWsmvSolverInterface](#).

3.154.3.5 virtual bool Ipopt::SparseSymLinearSolverInterface::IncreaseQuality () [pure virtual]

Request to increase quality of solution for next solve.

The calling class asks linear solver to increase quality of solution for the next solve (e.g. increase pivot tolerance).

Returns false, if this is not possible (e.g. maximal pivot tolerance already used.)

Implemented in [Ipopt::Ma97SolverInterface](#), [Ipopt::Ma86SolverInterface](#), [Ipopt::Ma77SolverInterface](#), [Ipopt::Ma57-TSolverInterface](#), [Ipopt::MumpsSolverInterface](#), [Ipopt::Ma27TSolverInterface](#), [Ipopt::IterativePardisoSolverInterface](#), [Ipopt::PardisoSolverInterface](#), [Ipopt::WsmpSolverInterface](#), and [Ipopt::IterativeWsmpSolverInterface](#).

3.154.3.6 `virtual bool Ipopt::SparseSymLinearSolverInterface::ProvidesInertia ( ) const` `[pure virtual]`

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implemented in [Ipopt::Ma97SolverInterface](#), [Ipopt::Ma86SolverInterface](#), [Ipopt::Ma77SolverInterface](#), [Ipopt::Ma57-TSolverInterface](#), [Ipopt::MumpsSolverInterface](#), [Ipopt::Ma27TSolverInterface](#), [Ipopt::IterativePardisoSolverInterface](#), [Ipopt::PardisoSolverInterface](#), [Ipopt::WsmpSolverInterface](#), and [Ipopt::IterativeWsmpSolverInterface](#).

3.154.3.7 `virtual bool Ipopt::SparseSymLinearSolverInterface::ProvidesDegeneracyDetection ( ) const` `[inline], [virtual]`

Query whether the indices of linearly dependent rows/columns can be determined by this linear solver.

Reimplemented in [Ipopt::Ma97SolverInterface](#), [Ipopt::Ma86SolverInterface](#), [Ipopt::Ma77SolverInterface](#), [Ipopt::Mumps-SolverInterface](#), and [Ipopt::WsmpSolverInterface](#).

Definition at line 226 of file `IpSparseSymLinearSolverInterface.hpp`.

3.154.3.8 `virtual ESymSolverStatus Ipopt::SparseSymLinearSolverInterface::DetermineDependentRows ( const Index * ia, const Index * ja, std::list< Index > & c_deps )` `[inline], [virtual]`

This method determines the list of row indices of the linearly dependent rows.

Reimplemented in [Ipopt::Ma97SolverInterface](#), [Ipopt::Ma86SolverInterface](#), [Ipopt::Ma77SolverInterface](#), [Ipopt::Mumps-SolverInterface](#), and [Ipopt::WsmpSolverInterface](#).

Definition at line 232 of file `IpSparseSymLinearSolverInterface.hpp`.

The documentation for this class was generated from the following file:


- `IpSparseSymLinearSolverInterface.hpp`

3.155 Ipopt::StandardScalingBase Class Reference

This is a base class for many standard scaling techniques.

```
#include <IpNLPScaling.hpp>
```

Inheritance diagram for `Ipopt::StandardScalingBase`:

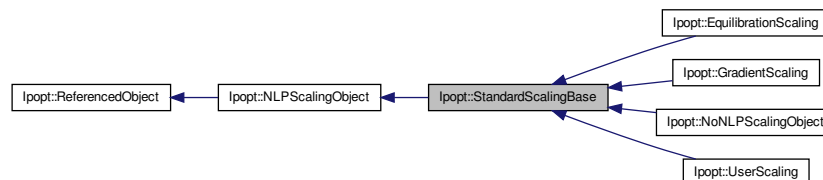

Public Member Functions

- virtual void [DetermineScaling](#) (const [SmartPtr](#)< const [VectorSpace](#) > x_space, const [SmartPtr](#)< const [VectorSpace](#) > c_space, const [SmartPtr](#)< const [VectorSpace](#) > d_space, const [SmartPtr](#)< const [MatrixSpace](#) > jac_c_space, const [SmartPtr](#)< const [MatrixSpace](#) > jac_d_space, const [SmartPtr](#)< const [SymMatrixSpace](#) > h_space, [SmartPtr](#)< const [MatrixSpace](#) > &new_jac_c_space, [SmartPtr](#)< const [MatrixSpace](#) > &new_jac_d_space, [SmartPtr](#)< const [SymMatrixSpace](#) > &new_h_space, const [Matrix](#) &Px_L, const [Vector](#) &x_L, const [Matrix](#) &Px_U, const [Vector](#) &x_U)

This method is called by the [IpoptNLP](#)'s at a convenient time to compute and/or read scaling factors.

Constructors/Destructors

- [StandardScalingBase](#) ()
- virtual [~StandardScalingBase](#) ()

Default destructor.

- virtual Number [apply_obj_scaling](#) (const Number &f)
Methods to map scaled and unscaled matrices.
- virtual Number [unapply_obj_scaling](#) (const Number &f)
Returns an obj-unscaled version of the given scalar.
- virtual [SmartPtr](#)< [Vector](#) > [apply_vector_scaling_x_NonConst](#) (const [SmartPtr](#)< const [Vector](#) > &v)
Returns an x-scaled version of the given vector.
- virtual [SmartPtr](#)< const [Vector](#) > [apply_vector_scaling_x](#) (const [SmartPtr](#)< const [Vector](#) > &v)
Returns an x-scaled version of the given vector.
- virtual [SmartPtr](#)< [Vector](#) > [unapply_vector_scaling_x_NonConst](#) (const [SmartPtr](#)< const [Vector](#) > &v)
Returns an x-unscaled version of the given vector.
- virtual [SmartPtr](#)< const [Vector](#) > [unapply_vector_scaling_x](#) (const [SmartPtr](#)< const [Vector](#) > &v)
Returns an x-unscaled version of the given vector.
- virtual [SmartPtr](#)< const [Vector](#) > [apply_vector_scaling_c](#) (const [SmartPtr](#)< const [Vector](#) > &v)
Returns an c-scaled version of the given vector.
- virtual [SmartPtr](#)< const [Vector](#) > [unapply_vector_scaling_c](#) (const [SmartPtr](#)< const [Vector](#) > &v)
Returns an c-unscaled version of the given vector.
- virtual [SmartPtr](#)< [Vector](#) > [apply_vector_scaling_c_NonConst](#) (const [SmartPtr](#)< const [Vector](#) > &v)
Returns an c-scaled version of the given vector.
- virtual [SmartPtr](#)< [Vector](#) > [unapply_vector_scaling_c_NonConst](#) (const [SmartPtr](#)< const [Vector](#) > &v)
Returns an c-unscaled version of the given vector.
- virtual [SmartPtr](#)< const [Vector](#) > [apply_vector_scaling_d](#) (const [SmartPtr](#)< const [Vector](#) > &v)
Returns an d-scaled version of the given vector.
- virtual [SmartPtr](#)< const [Vector](#) > [unapply_vector_scaling_d](#) (const [SmartPtr](#)< const [Vector](#) > &v)
Returns an d-unscaled version of the given vector.
- virtual [SmartPtr](#)< [Vector](#) > [apply_vector_scaling_d_NonConst](#) (const [SmartPtr](#)< const [Vector](#) > &v)
Returns an d-scaled version of the given vector.
- virtual [SmartPtr](#)< [Vector](#) > [unapply_vector_scaling_d_NonConst](#) (const [SmartPtr](#)< const [Vector](#) > &v)
Returns an d-unscaled version of the given vector.
- virtual [SmartPtr](#)< const [Matrix](#) > [apply_jac_c_scaling](#) ([SmartPtr](#)< const [Matrix](#) > matrix)
Returns a scaled version of the jacobian for c.
- virtual [SmartPtr](#)< const [Matrix](#) > [apply_jac_d_scaling](#) ([SmartPtr](#)< const [Matrix](#) > matrix)
Returns a scaled version of the jacobian for d If the overloaded method does not create a new matrix, make sure to set the matrix ptr passed in to NULL.

- virtual [SmartPtr](#)< const [SymMatrix](#) > [apply_hessian_scaling](#) ([SmartPtr](#)< const [SymMatrix](#) > matrix)

Returns a scaled version of the hessian of the lagrangian. If the overloaded method does not create a new matrix, make sure to set the matrix ptr passed in to NULL.

Methods for determining whether scaling for entities is

done

- virtual bool [have_x_scaling](#) ()
Returns true if the primal x variables are scaled.
- virtual bool [have_c_scaling](#) ()
Returns true if the equality constraints are scaled.
- virtual bool [have_d_scaling](#) ()
Returns true if the inequality constraints are scaled.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)

Methods for IpoptType.

Protected Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
Overloaded initialization method.
- virtual void [DetermineScalingParametersImpl](#) (const [SmartPtr](#)< const [VectorSpace](#) > x_space, const [SmartPtr](#)< const [VectorSpace](#) > c_space, const [SmartPtr](#)< const [VectorSpace](#) > d_space, const [SmartPtr](#)< const [MatrixSpace](#) > jac_c_space, const [SmartPtr](#)< const [MatrixSpace](#) > jac_d_space, const [SmartPtr](#)< const [SymMatrixSpace](#) > h_space, const [Matrix](#) &Px_L, const [Vector](#) &x_L, const [Matrix](#) &Px_U, const [Vector](#) &x_U, Number &df, [SmartPtr](#)< [Vector](#) > &dx, [SmartPtr](#)< [Vector](#) > &dc, [SmartPtr](#)< [Vector](#) > &dd)=0

This is the method that has to be overloaded by a particular scaling method that somehow computes the scaling vectors dx, dc, and dd.

3.155.1 Detailed Description

This is a base class for many standard scaling techniques.

The overloaded classes only need to provide the scaling parameters

Definition at line 229 of file IpNLPScaling.hpp.

3.155.2 Member Function Documentation

3.155.2.1 virtual Number Ipopt::StandardScalingBase::apply_obj_scaling (const Number & f) [virtual]

Methods to map scaled and unscaled matrices.

Returns an obj-scaled version of the given scalar

Implements [Ipopt::NLPScalingObject](#).

3.155.2.2 `virtual SmartPtr<const Matrix> Ipopt::StandardScalingBase::apply_jac_c_scaling ( SmartPtr< const Matrix > matrix ) [virtual]`

Returns a scaled version of the jacobian for c.

If the overloaded method does not make a new matrix, make sure to set the matrix ptr passed in to NULL.

Implements [Ipopt::NLPScalingObject](#).

3.155.2.3 `virtual bool Ipopt::StandardScalingBase::have_x_scaling ( ) [virtual]`

Returns true if the primal x variables are scaled.

Implements [Ipopt::NLPScalingObject](#).

3.155.2.4 `virtual bool Ipopt::StandardScalingBase::have_c_scaling ( ) [virtual]`

Returns true if the equality constraints are scaled.

Implements [Ipopt::NLPScalingObject](#).

3.155.2.5 `virtual bool Ipopt::StandardScalingBase::have_d_scaling ( ) [virtual]`

Returns true if the inequality constraints are scaled.

Implements [Ipopt::NLPScalingObject](#).

3.155.2.6 `virtual void Ipopt::StandardScalingBase::DetermineScalingParametersImpl (const SmartPtr< const VectorSpace > x_space, const SmartPtr< const VectorSpace > c_space, const SmartPtr< const VectorSpace > d_space, const SmartPtr< const MatrixSpace > jac_c_space, const SmartPtr< const MatrixSpace > jac_d_space, const SmartPtr< const SymMatrixSpace > h_space, const Matrix & Px_L, const Vector & x_L, const Matrix & Px_U, const Vector & x_U, Number & df, SmartPtr< Vector > & dx, SmartPtr< Vector > & dc, SmartPtr< Vector > & dd) [protected],[pure virtual]`

This is the method that has to be overloaded by a particular scaling method that somehow computes the scaling vectors dx, dc, and dd.

The pointers to those vectors can be NULL, in which case no scaling for that item will be done later.

Implemented in [Ipopt::NoNLPScalingObject](#), [Ipopt::EquilibrationScaling](#), [Ipopt::GradientScaling](#), and [Ipopt::UserScaling](#).

The documentation for this class was generated from the following file:


- IpNLPScaling.hpp

3.156 Ipopt::StdAugSystemSolver Class Reference

Solver for the augmented system for triple type matrices.

```
#include <IpStdAugSystemSolver.hpp>
```

Inheritance diagram for Ipopt::StdAugSystemSolver:

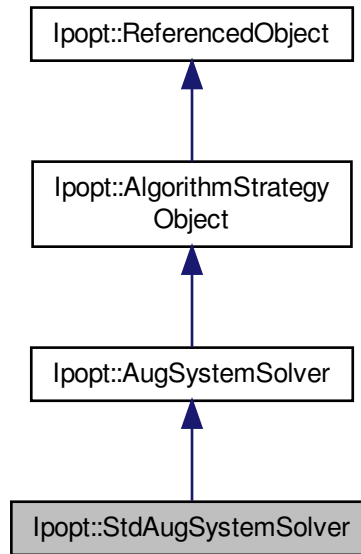

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual ESymSolverStatus [MultiSolve](#) (const [SymMatrix](#) *W, double W_factor, const [Vector](#) *D_x, double delta_x, const [Vector](#) *D_s, double delta_s, const [Matrix](#) *J_c, const [Vector](#) *D_c, double delta_c, const [Matrix](#) *J_d, const [Vector](#) *D_d, double delta_d, std::vector< [SmartPtr](#)< const [Vector](#) > > &rhs_xV, std::vector< [SmartPtr](#)< const [Vector](#) > > &rhs_sV, std::vector< [SmartPtr](#)< const [Vector](#) > > &rhs_cV, std::vector< [SmartPtr](#)< const [Vector](#) > > &rhs_dV, std::vector< [SmartPtr](#)< [Vector](#) > > &sol_xV, std::vector< [SmartPtr](#)< [Vector](#) > > &sol_sV, std::vector< [SmartPtr](#)< [Vector](#) > > &sol_cV, std::vector< [SmartPtr](#)< [Vector](#) > > &sol_dV, bool check_NegEvals, Index numberOfNegEvals)
Set up the augmented system and solve it for a set of given right hand side - implementation for GenTMatrices and SymTMatrices.
- virtual Index [NumberOfNegEvals](#) () const
Number of negative eigenvalues detected during last solve.
- virtual bool [ProvidesInertia](#) () const
Query whether inertia is computed by linear solver.
- virtual bool [IncreaseQuality](#) ()
Request to increase quality of solution for next solve.

Constructors/Destructors

- [StdAugSystemSolver](#) ([SymLinearSolver](#) &LinSolver)
Constructor using only a linear solver object.
- virtual [~StdAugSystemSolver](#) ()
Default destructor.

Additional Inherited Members

3.156.1 Detailed Description

Solver for the augmented system for triple type matrices.

The current implemetation assumes that all matrices are of the type [SymTMatrix](#), and all vectors are of the type [Dense-Vector](#).

Definition at line 27 of file IpStdAugSystemSolver.hpp.

3.156.2 Member Function Documentation

3.156.2.1 virtual Index Ipopt::StdAugSystemSolver::NumberOfNegEvals () const [virtual]

Number of negative eigenvalues detected during last solve.

Returns the number of negative eigenvalues of the most recent factorized matrix. This must not be called if the linear solver does not compute this quantities (see ProvidesInertia).

Implements [Ipopt::AugSystemSolver](#).

3.156.2.2 virtual bool Ipopt::StdAugSystemSolver::ProvidesInertia () const [virtual]

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implements [Ipopt::AugSystemSolver](#).

3.156.2.3 virtual bool Ipopt::StdAugSystemSolver::IncreaseQuality () [virtual]

Request to increase quality of solution for next solve.

Ask underlying linear solver to increase quality of solution for the next solve (e.g. increase pivot tolerance). Returns false, if this is not possible (e.g. maximal pivot tolerance already used.)

Implements [Ipopt::AugSystemSolver](#).

The documentation for this class was generated from the following file:


- IpStdAugSystemSolver.hpp

3.157 Ipopt::StdInterfaceTNLP Class Reference

Implementation of a [TNLP](#) for the Standard C interface.

```
#include <IpStdInterfaceTNLP.hpp>
```

Inheritance diagram for Ipopt::StdInterfaceTNLP:

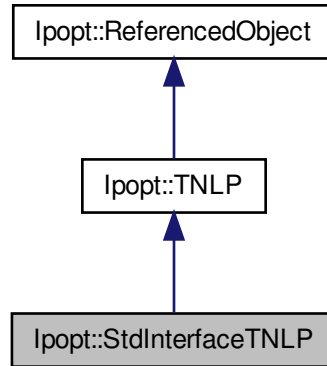

Public Member Functions

Constructors/Destructors

- [StdInterfaceTNLP](#) (Index n_var, const Number *x_L, const Number *x_U, Index n_con, const Number *g_L, const Number *g_U, Index nele_jac, Index nele_hess, Index index_style, const Number *start_x, const Number *start_lam, const Number *start_z_L, const Number *start_z_U, Eval_F_CB [eval_f](#), Eval_G_CB [eval_g](#), Eval_Grad_F_CB [eval_grad_f](#), Eval_Jac_G_CB [eval_jac_g](#), Eval_H_CB [eval_h](#), Intermediate_CB [intermediate_cb](#), Number *x_sol, Number *z_L_sol, Number *z_U_sol, Number *g_sol, Number *lam_sol, Number *obj_sol, UserDataPtr user_data, Number obj_scaling=1, const Number *x_scaling=NULL, const Number *g_scaling=NULL)
Constructor, given dimensions of problem, function pointers for evaluation callback functions, and starting points.
- virtual [~StdInterfaceTNLP](#) ()
Default destructor.

methods to gather information about the NLP. These methods are

overloaded from [TNLP](#).

See [TNLP](#) for their more detailed documentation.

- virtual bool [get_nlp_info](#) (Index &n, Index &m, Index &nnz_jac_g, Index &nnz_h_lag, [IndexStyleEnum](#) &index_style)
returns dimensions of the nlp.
- virtual bool [get_bounds_info](#) (Index n, Number *x_l, Number *x_u, Index m, Number *g_l, Number *g_u)
returns bounds of the nlp.
- virtual bool [get_scaling_parameters](#) (Number &obj_scaling, bool &use_x_scaling, Index n, Number *x_scaling, bool &use_g_scaling, Index m, Number *g_scaling)
returns scaling parameters (if nlp_scaling_method is selected as user-scaling).
- virtual bool [get_starting_point](#) (Index n, bool init_x, Number *x, bool init_z, Number *z_L, Number *z_U, Index m, bool init_lambda, Number *lambda)
provides a starting point for the nlp variables.
- virtual bool [eval_f](#) (Index n, const Number *x, bool new_x, Number &obj_value)

- evaluates the objective value for the nlp.*
- virtual bool [eval_grad_f](#) (Index n, const Number *x, bool new_x, Number *grad_f)
evaluates the gradient of the objective for the nlp.
- virtual bool [eval_g](#) (Index n, const Number *x, bool new_x, Index m, Number *g)
evaluates the constraint residuals for the nlp.
- virtual bool [eval_jac_g](#) (Index n, const Number *x, bool new_x, Index m, Index nele_jac, Index *iRow, Index *jCol, Number *values)
specifies the jacobian structure (if values is NULL) and evaluates the jacobian values (if values is not NULL) for the nlp.
- virtual bool [eval_h](#) (Index n, const Number *x, bool new_x, Number obj_factor, Index m, const Number *lambda, bool new_lambda, Index nele_hess, Index *iRow, Index *jCol, Number *values)
specifies the structure of the hessian of the lagrangian (if values is NULL) and evaluates the values (if values is not NULL).
- virtual bool [intermediate_callback](#) (AlgorithmMode mode, Index iter, Number obj_value, Number inf_pr, Number inf_du, Number mu, Number d_norm, Number regularization_size, Number alpha_du, Number alpha_pr, Index ls_trials, const [IpoptData](#) *ip_data, [IpoptCalculatedQuantities](#) *ip_cq)
Intermediate Callback method for the user.

Solution Methods

- virtual void [finalize_solution](#) (SolverReturn status, Index n, const Number *x, const Number *z_L, const Number *z_U, Index m, const Number *g, const Number *lambda, Number obj_value, const [IpoptData](#) *ip_data, [IpoptCalculatedQuantities](#) *ip_cq)
This method is called when the algorithm is complete so the [TNLP](#) can store/write the solution.

Additional Inherited Members

3.157.1 Detailed Description

Implementation of a [TNLP](#) for the Standard C interface.

The standard C interface is exposed to the user as a single C function that is given problem dimension, starting points, and pointers for functions that evaluate objective function etc.

Definition at line 30 of file IpStdInterfaceTNLP.hpp.

3.157.2 Constructor & Destructor Documentation

- 3.157.2.1 [Ipopt::StdInterfaceTNLP::StdInterfaceTNLP](#) (Index n_var, const Number * x_L, const Number * x_U, Index n_con, const Number * g_L, const Number * g_U, Index nele_jac, Index nele_hess, Index index_style, const Number * start_x, const Number * start_lam, const Number * start_z_L, const Number * start_z_U, Eval_F_CB eval_f, Eval_G_CB eval_g, Eval_Grad_F_CB eval_grad_f, Eval_Jac_G_CB eval_jac_g, Eval_H_CB eval_h, Intermediate_CB intermediate_cb, Number * x_sol, Number * z_L_sol, Number * z_U_sol, Number * g_sol, Number * lam_sol, Number * obj_sol, UserDataPtr user_data, Number obj_scaling = 1, const Number * x_scaling = NULL, const Number * g_scaling = NULL)

Constructor, given dimensions of problem, function pointers for evaluation callback functions, and starting points.

Note that the constructor does not make a copy of any of the Number arrays, i.e. it is up to the caller to keep them around.

3.157.3 Member Function Documentation

- 3.157.3.1 virtual bool [Ipopt::StdInterfaceTNLP::get_nlp_info](#) (Index & n, Index & m, Index & nnz_jac_g, Index & nnz_h_lag, IndexStyleEnum & index_style) [virtual]

returns dimensions of the nlp.

Overloaded from [TNLP](#)

Implements [Ipopt::TNLP](#).

3.157.3.2 `virtual bool Ipopt::StdInterfaceTNLP::get_bounds_info ( Index n, Number * x_l, Number * x_u, Index m, Number * g_l, Number * g_u ) [virtual]`

returns bounds of the nlp.

Overloaded from [TNLP](#)

Implements [Ipopt::TNLP](#).

3.157.3.3 `virtual bool Ipopt::StdInterfaceTNLP::get_scaling_parameters ( Number & obj_scaling, bool & use_x_scaling, Index n, Number * x_scaling, bool & use_g_scaling, Index m, Number * g_scaling ) [virtual]`

returns scaling parameters (if nlp_scaling_method is selected as user-scaling).

Overloaded from [TNLP](#)

Reimplemented from [Ipopt::TNLP](#).

3.157.3.4 `virtual bool Ipopt::StdInterfaceTNLP::get_starting_point ( Index n, bool init_x, Number * x, bool init_z, Number * z_L, Number * z_U, Index m, bool init_lambda, Number * lambda ) [virtual]`

provides a starting point for the nlp variables.

Overloaded from [TNLP](#)

Implements [Ipopt::TNLP](#).

3.157.3.5 `virtual bool Ipopt::StdInterfaceTNLP::eval_f ( Index n, const Number * x, bool new_x, Number & obj_value ) [virtual]`

evaluates the objective value for the nlp.

Overloaded from [TNLP](#)

Implements [Ipopt::TNLP](#).

3.157.3.6 `virtual bool Ipopt::StdInterfaceTNLP::eval_grad_f ( Index n, const Number * x, bool new_x, Number * grad_f ) [virtual]`

evaluates the gradient of the objective for the nlp.

Overloaded from [TNLP](#)

Implements [Ipopt::TNLP](#).

3.157.3.7 `virtual bool Ipopt::StdInterfaceTNLP::eval_g ( Index n, const Number * x, bool new_x, Index m, Number * g ) [virtual]`

evaluates the constraint residuals for the nlp.

Overloaded from [TNLP](#)

Implements [Ipopt::TNLP](#).

3.157.3.8 `virtual bool Ipopt::StdInterfaceTNLP::eval_jac_g ( Index n, const Number * x, bool new_x, Index m, Index nele_jac, Index * iRow, Index * jCol, Number * values ) [virtual]`

specifies the jacobian structure (if values is NULL) and evaluates the jacobian values (if values is not NULL) for the nlp.

Overloaded from [TNLP](#)

Implements [Ipopt::TNLP](#).

3.157.3.9 `virtual bool Ipopt::StdInterfaceTNLP::eval_h ( Index n, const Number * x, bool new_x, Number obj_factor, Index m, const Number * lambda, bool new_lambda, Index nele_hess, Index * iRow, Index * jCol, Number * values ) [virtual]`

specifies the structure of the hessian of the lagrangian (if values is NULL) and evaluates the values (if values is not NULL).

Overloaded from [TNLP](#)

Reimplemented from [Ipopt::TNLP](#).

3.157.3.10 `virtual bool Ipopt::StdInterfaceTNLP::intermediate_callback (AlgorithmMode mode, Index iter, Number obj_value, Number inf_pr, Number inf_du, Number mu, Number d_norm, Number regularization_size, Number alpha_du, Number alpha_pr, Index ls_trials, const IpoptData * ip_data, IpoptCalculatedQuantities * ip_cq) [virtual]`

Intermediate Callback method for the user.

Overloaded from [TNLP](#)

Reimplemented from [Ipopt::TNLP](#).

The documentation for this class was generated from the following file:


- IpStdInterfaceTNLP.hpp

3.158 Ipopt::StreamJournal Class Reference

[StreamJournal](#) class.

```
#include <IpJournalist.hpp>
```

Inheritance diagram for Ipopt::StreamJournal:

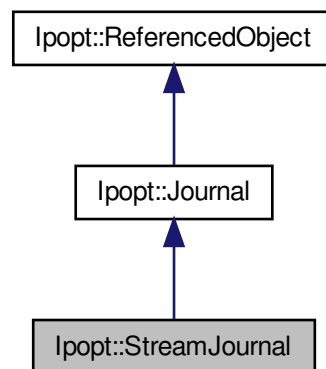

Public Member Functions

- [StreamJournal](#) (const std::string &name, EJournalLevel default_level)
Constructor.
- virtual [~StreamJournal](#) ()
Destructor.
- void [SetOutputStream](#) (std::ostream *os)
Setting the output stream pointer.

Protected Member Functions

Implementation version of Print methods - Overloaded from[Journal](#) base class.

- virtual void [PrintImpl](#) (EJournalCategory category, EJournalLevel level, const char *str)
Print to the designated output location.
- virtual void [PrintfImpl](#) (EJournalCategory category, EJournalLevel level, const char *pformat, va_list ap)
Printf to the designated output location.
- virtual void [FlushBufferImpl](#) ()
Flush output buffer.

3.158.1 Detailed Description

[StreamJournal](#) class.

This is a particular [Journal](#) implementation that writes to a stream for output.

Definition at line 440 of file IpJournalist.hpp.

3.158.2 Constructor & Destructor Documentation

3.158.2.1 Ipopt::StreamJournal::StreamJournal (const std::string & name, EJournalLevel default_level)

Constructor.

3.158.2.2 virtual Ipopt::StreamJournal::~~StreamJournal () [inline],[virtual]

Destructor.

Definition at line 447 of file IpJournalist.hpp.

3.158.3 Member Function Documentation

3.158.3.1 virtual void Ipopt::StreamJournal::FlushBufferImpl () [protected],[virtual]

Flush output buffer.

Implements [Ipopt::Journal](#).

The documentation for this class was generated from the following file:

- IpJournalist.hpp

3.159 Ipopt::RegisteredOption::string_entry Class Reference

class to hold the valid string settings for a string option

```
#include <IpRegOptions.hpp>
```

3.159.1 Detailed Description

class to hold the valid string settings for a string option

Definition at line 37 of file IpRegOptions.hpp.

The documentation for this class was generated from the following file:


- IpRegOptions.hpp

3.160 Ipopt::Subject Class Reference

Slight Variation of the [Observer](#) Design Pattern ([Subject](#) part).

```
#include <IpObserver.hpp>
```

Inheritance diagram for Ipopt::Subject:

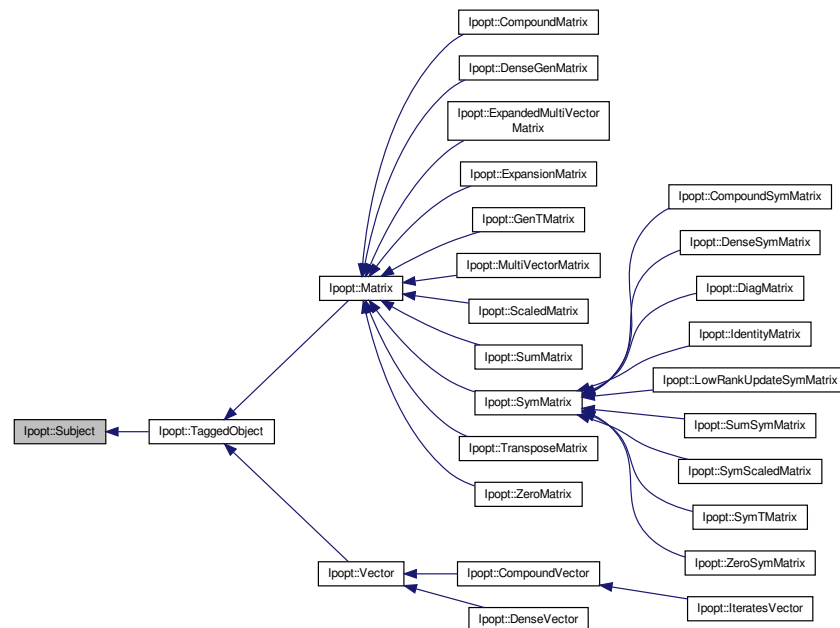

Public Member Functions

Constructors/Destructors

- [Subject](#) ()

Default Constructor.

- virtual [~Subject](#) ()
Default destructor.

Methods to Add and Remove Observers.

Currently, the `notify_type` flags are not used, and Observers are attached in general and will receive all notifications (of the type requested and possibly of types not requested).

It is up to the observer to ignore the types they are not interested in. The `NotifyType` in the parameter list is so a more efficient mechanism depending on type could be implemented later if necessary.

- void [AttachObserver](#) ([Observer::NotifyType](#) notify_type, [Observer](#) *observer) const
Attach the specified observer (i.e., begin receiving notifications).
- void [DetachObserver](#) ([Observer::NotifyType](#) notify_type, [Observer](#) *observer) const
Detach the specified observer (i.e., no longer receive notifications).

3.160.1 Detailed Description

Slight Variation of the [Observer](#) Design Pattern ([Subject](#) part).

This class implements the [Subject](#) class of the [Observer](#) Design Pattern. An [Observer](#) "Attach"es to a [Subject](#), indicating that it would like to be notified of changes in the [Subject](#). Any derived class that is to be observed has to inherit off the [Subject](#) base class. If the subject needs to notify the [Observer](#), it calls the `Notify` method.

Definition at line 129 of file `IpObserver.hpp`.

3.160.2 Member Function Documentation

3.160.2.1 void `Ipopt::Subject::AttachObserver ( Observer::NotifyType notify_type, Observer * observer ) const`
`[inline]`

Attach the specified observer (i.e., begin receiving notifications).

Definition at line 309 of file `IpObserver.hpp`.

3.160.2.2 void `Ipopt::Subject::DetachObserver ( Observer::NotifyType notify_type, Observer * observer ) const`
`[inline]`

Detach the specified observer (i.e., no longer receive notifications).

Definition at line 329 of file `IpObserver.hpp`.

The documentation for this class was generated from the following file:


- `IpObserver.hpp`

3.161 Ipopt::SumMatrix Class Reference

Class for Matrices which are sum of matrices.

```
#include <IpSumMatrix.hpp>
```

Inheritance diagram for Ipopt::SumMatrix:

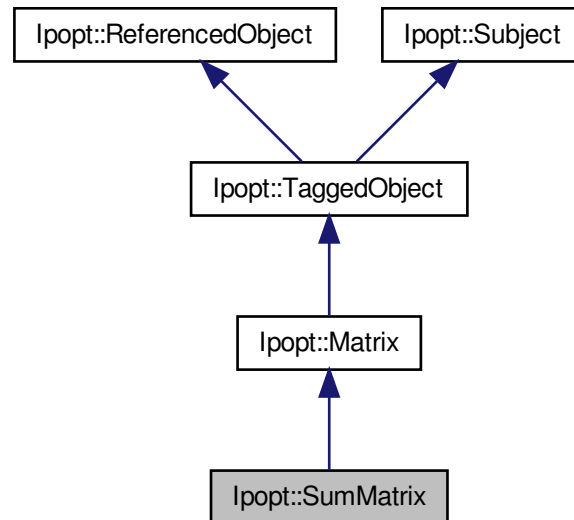

Public Member Functions

- void [SetTerm](#) (Index item, Number factor, const [Matrix](#) &matrix)
Method for setting term item for the sum.
- void [GetTerm](#) (Index item, Number &factor, [SmartPtr](#)< const [Matrix](#) > &matrix) const
Method for getting term item for the sum.
- Index [NTerms](#) () const
Return the number of terms.

Constructors / Destructors

- [SumMatrix](#) (const [SumMatrixSpace](#) *owner_space)
Constructor, taking the owner_space.
- virtual [~SumMatrix](#) ()
Destructor.

Protected Member Functions

Methods overloaded from matrix

- virtual void [MultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix-vector multiply.
- virtual void [TransMultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix(transpose) vector multiply.
- virtual bool [IsValidNumbersImpl](#) () const

- Method for determining if all stored numbers are valid (i.e., no Inf or Nan).*
- virtual void [ComputeRowAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const
Compute the max-norm of the rows in the matrix.
- virtual void [ComputeColAMaxImpl](#) ([Vector](#) &cols_norms, bool init) const
Compute the max-norm of the columns in the matrix.
- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
Print detailed information about the matrix.

Additional Inherited Members

3.161.1 Detailed Description

Class for Matrices which are sum of matrices.

For each term in the we store the matrix and a factor.

Definition at line 24 of file IpSumMatrix.hpp.

3.161.2 Member Function Documentation

3.161.2.1 void Ipopt::SumMatrix::SetTerm (Index *item*, Number *factor*, const Matrix & *matrix*)

Method for setting term *item* for the sum.

3.161.2.2 void Ipopt::SumMatrix::GetTerm (Index *item*, Number & *factor*, SmartPtr< const Matrix > & *matrix*) const

Method for getting term *item* for the sum.

Note that counting of terms starts at 0.

3.161.2.3 virtual void Ipopt::SumMatrix::MultVectorImpl (Number *alpha*, const Vector & *x*, Number *beta*, Vector & *y*) const [protected], [virtual]

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.161.2.4 virtual void Ipopt::SumMatrix::TransMultVectorImpl (Number *alpha*, const Vector & *x*, Number *beta*, Vector & *y*) const [protected], [virtual]

Matrix(transpose) vector multiply.

Computes $y = \alpha * \text{Matrix}^T * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.161.2.5 virtual bool Ipopt::SumMatrix::IsValidNumbersImpl () const [protected], [virtual]

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Reimplemented from [Ipopt::Matrix](#).

3.161.2.6 virtual void Ipopt::SumMatrix::ComputeRowAMaxImpl (Vector & *rows_norms*, bool *init*) const [protected], [virtual]

Compute the max-norm of the rows in the matrix.

The result is stored in `rows_norms`. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.161.2.7 `virtual void Ipopt::SumMatrix::ComputeColAMaxImpl ( Vector & cols_norms, bool init ) const` `[protected]`,
`[virtual]`

Compute the max-norm of the columns in the matrix.

The result is stored in `cols_norms`. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.161.2.8 `virtual void Ipopt::SumMatrix::PrintImpl ( const Journalist & jnlst, EJournalLevel level, EJournalCategory category, const std::string & name, Index indent, const std::string & prefix ) const` `[protected]`, `[virtual]`

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

The documentation for this class was generated from the following file:


- `IpSumMatrix.hpp`

3.162 Ipopt::SumMatrixSpace Class Reference

Class for matrix space for [SumMatrix](#).

```
#include <IpSumMatrix.hpp>
```

Inheritance diagram for `Ipopt::SumMatrixSpace`:

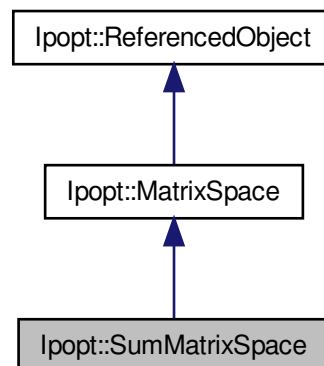

Public Member Functions

- Index [NTerms](#) () const
Accessor functions to get the number of terms in the sum.

- void [SetTermSpace](#) (Index term_idx, const [MatrixSpace](#) &mat_space)
Set the appropriate matrix space for each term.
- [SmartPtr](#)< const [MatrixSpace](#) > [GetTermSpace](#) (Index term_idx) const
Get the matrix space for a particular term.
- [SumMatrix](#) * [MakeNewSumMatrix](#) () const
Method for creating a new matrix of this specific type.
- virtual [Matrix](#) * [MakeNew](#) () const
Overloaded MakeNew method for the [MatrixSpace](#) base class.

Constructors / Destructors

- [SumMatrixSpace](#) (Index nrows, Index ncols, Index nterms)
Constructor, given the number of row and columns, as well as the number of terms in the sum.
- virtual [~SumMatrixSpace](#) ()
Destructor.

3.162.1 Detailed Description

Class for matrix space for [SumMatrix](#).

Definition at line 103 of file IpSumMatrix.hpp.

3.162.2 Member Function Documentation

3.162.2.1 Index Ipopt::SumMatrixSpace::NTerms () const `[inline]`

Accessor functions to get the number of terms in the sum.

Definition at line 123 of file IpSumMatrix.hpp.

3.162.2.2 void Ipopt::SumMatrixSpace::SetTermSpace (Index term_idx, const MatrixSpace & mat_space)

Set the appropriate matrix space for each term.

This must be called for each term or a runtime error will occur

3.162.2.3 SumMatrix* Ipopt::SumMatrixSpace::MakeNewSumMatrix () const

Method for creating a new matrix of this specific type.

The documentation for this class was generated from the following file:


- IpSumMatrix.hpp

3.163 Ipopt::SumSymMatrix Class Reference

Class for Matrices which are sum of symmetric matrices.

```
#include <IpSumSymMatrix.hpp>
```

Inheritance diagram for Ipopt::SumSymMatrix:

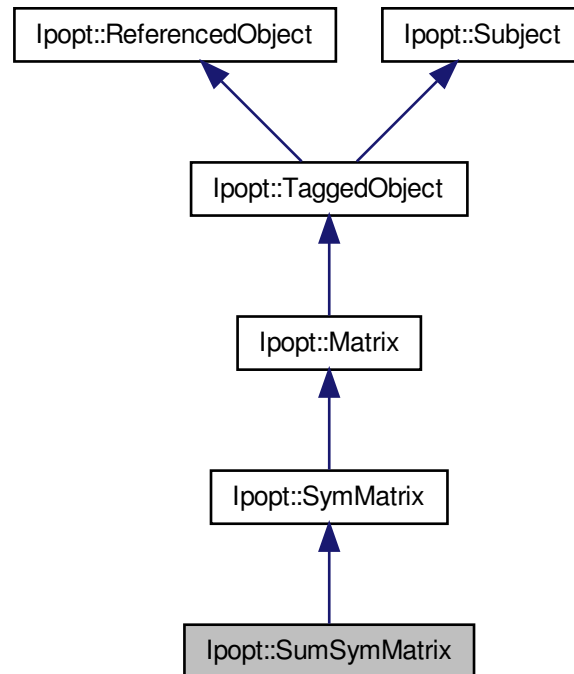

Public Member Functions

- void [SetTerm](#) (Index item, Number factor, const [SymMatrix](#) &matrix)
Method for setting term item for the sum.
- void [GetTerm](#) (Index item, Number &factor, [SmartPtr](#)< const [SymMatrix](#) > &matrix) const
Method for getting term item for the sum.
- Index [NTerms](#) () const
Return the number of terms.

Constructors / Destructors

- [SumSymMatrix](#) (const [SumSymMatrixSpace](#) *owner_space)
Constructor, initializing with dimensions of the matrix and the number of terms in the sum.
- [~SumSymMatrix](#) ()
Destructor.

Protected Member Functions

Methods overloaded from matrix

- virtual void [MultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix-vector multiply.
- virtual bool [IsValidNumbersImpl](#) () const
Method for determining if all stored numbers are valid (i.e., no Inf or Nan).
- virtual void [ComputeRowAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const
Compute the max-norm of the rows in the matrix.
- virtual void [ComputeColAMaxImpl](#) ([Vector](#) &cols_norms, bool init) const
Since the matrix is symmetric, the row and column max norms are identical.
- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
Print detailed information about the matrix.

Additional Inherited Members

3.163.1 Detailed Description

Class for Matrices which are sum of symmetric matrices.

For each term in the we store the matrix and a factor.

Definition at line 24 of file IpSumSymMatrix.hpp.

3.163.2 Member Function Documentation

3.163.2.1 void Ipopt::SumSymMatrix::SetTerm (Index *item*, Number *factor*, const SymMatrix & *matrix*)

Method for setting term item for the sum.

Note that counting of terms starts at 0.

3.163.2.2 void Ipopt::SumSymMatrix::GetTerm (Index *item*, Number & *factor*, SmartPtr< const SymMatrix > & *matrix*) const

Method for getting term item for the sum.

Note that counting of terms starts at 0.

3.163.2.3 virtual void Ipopt::SumSymMatrix::MultVectorImpl (Number *alpha*, const [Vector](#) & *x*, Number *beta*, [Vector](#) & *y*) const [protected], [virtual]

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.163.2.4 virtual bool Ipopt::SumSymMatrix::IsValidNumbersImpl () const [protected], [virtual]

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Reimplemented from [Ipopt::Matrix](#).

3.163.2.5 virtual void Ipopt::SumSymMatrix::ComputeRowAMaxImpl ([Vector](#) & *rows_norms*, bool *init*) const [protected], [virtual]

Compute the max-norm of the rows in the matrix.

The result is stored in rows_norms. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.163.2.6 virtual void Ipopt::SumSymMatrix::PrintImpl (const Journalist & *jnlst*, EJournalLevel *level*, EJournalCategory *category*, const std::string & *name*, Index *indent*, const std::string & *prefix*) const [protected], [virtual]

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

The documentation for this class was generated from the following file:


- IpSumSymMatrix.hpp

3.164 Ipopt::SumSymMatrixSpace Class Reference

Class for matrix space for [SumSymMatrix](#).

```
#include <IpSumSymMatrix.hpp>
```

Inheritance diagram for Ipopt::SumSymMatrixSpace:

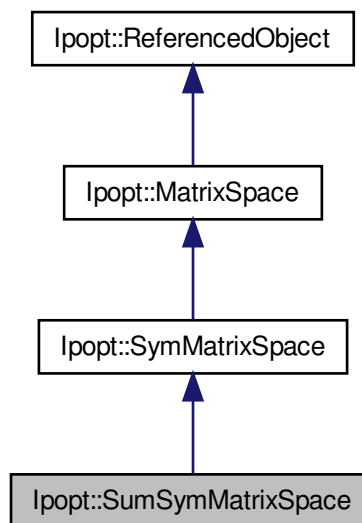

Public Member Functions

- void [SetTermSpace](#) (Index term_idx, const [SymMatrixSpace](#) &space)
Use this method to set the matrix spaces for the various terms.
- [SmartPtr](#)< const [SymMatrixSpace](#) > [GetTermSpace](#) (Index term_idx) const
Get the matrix space for a particular term.
- [SumSymMatrix](#) * [MakeNewSumSymMatrix](#) () const
Method for creating a new matrix of this specific type.
- virtual [SymMatrix](#) * [MakeNewSymMatrix](#) () const
Overloaded MakeNew method for the [SymMatrixSpace](#) base class.

Constructors / Destructors

- [SumSymMatrixSpace](#) (Index ndim, Index nterms)
Constructor, given the dimension of the matrix and the number of terms in the sum.
- [~SumSymMatrixSpace](#) ()
Destructor.

Accessor functions

- Index [NTerms](#) () const
Number of terms in the sum.

3.164.1 Detailed Description

Class for matrix space for [SumSymMatrix](#).

Definition at line 103 of file IpSumSymMatrix.hpp.

3.164.2 Constructor & Destructor Documentation**3.164.2.1 Ipopt::SumSymMatrixSpace::SumSymMatrixSpace (Index ndim, Index nterms) [inline]**

Constructor, given the dimension of the matrix and the number of terms in the sum.

Definition at line 110 of file IpSumSymMatrix.hpp.

3.164.3 Member Function Documentation**3.164.3.1 Index Ipopt::SumSymMatrixSpace::NTerms () const [inline]**

Number of terms in the sum.

Definition at line 124 of file IpSumSymMatrix.hpp.

3.164.3.2 void Ipopt::SumSymMatrixSpace::SetTermSpace (Index term_idx, const SymMatrixSpace & space)

Use this method to set the matrix spaces for the various terms.

You will not be able to create a matrix until all these spaces are set.

3.164.3.3 SumSymMatrix* Ipopt::SumSymMatrixSpace::MakeNewSumSymMatrix () const

Method for creating a new matrix of this specific type.

The documentation for this class was generated from the following file:


- IpSumSymMatrix.hpp

3.165 Ipopt::SymLinearSolver Class Reference

Base class for all derived symmetric linear solvers.

```
#include <IpSymLinearSolver.hpp>
```

Inheritance diagram for Ipopt::SymLinearSolver:

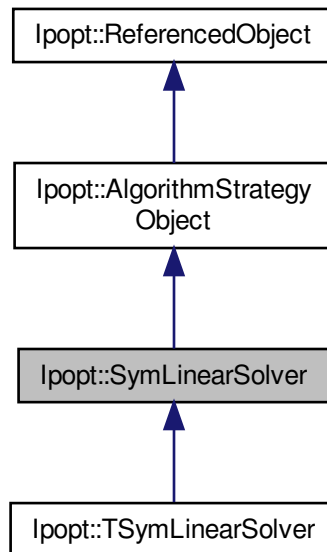

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
overloaded from [AlgorithmStrategyObject](#)

Constructor/Destructor

- **SymLinearSolver** ()
- virtual **~SymLinearSolver** ()

Methods for requesting solution of the linear system.

- virtual ESymSolverStatus [MultiSolve](#) (const [SymMatrix](#) &A, std::vector< [SmartPtr](#)< const [Vector](#) > > &rhsV, std::vector< [SmartPtr](#)< [Vector](#) > > &solV, bool check_NegEVals, Index numberOfNegEVals)=0
Solve operation for multiple right hand sides.
- ESymSolverStatus [Solve](#) (const [SymMatrix](#) &A, const [Vector](#) &rhs, [Vector](#) &sol, bool check_NegEVals, Index numberOfNegEVals)
Solve operation for a single right hand side.
- virtual Index [NumberOfNegEVals](#) () const =0
Number of negative eigenvalues detected during last factorization.
- virtual bool [IncreaseQuality](#) ()=0
Request to increase quality of solution for next solve.
- virtual bool [ProvidesInertia](#) () const =0
Query whether inertia is computed by linear solver.

Additional Inherited Members

3.165.1 Detailed Description

Base class for all derived symmetric linear solvers.

In the full space version of Ipopt a large linear system has to be solved for the augmented system. This case is meant to be the base class for all derived linear solvers for symmetric matrices (of type [SymMatrix](#)).

A linear solver can be used repeatedly for matrices with identical structure of nonzero elements. The nonzero structure of those matrices must not be changed between calls.

The called might ask the solver to only solve the linear system if the system is nonsingular, and if the number of negative eigenvalues matches a given number.

Definition at line 50 of file IpSymLinearSolver.hpp.

3.165.2 Member Function Documentation

3.165.2.1 `virtual ESymSolverStatus Ipopt::SymLinearSolver::MultiSolve ( const SymMatrix & A, std::vector< SmartPtr< const Vector > > & rhsV, std::vector< SmartPtr< Vector > > & solV, bool check_NegEvals, Index numberOfNegEvals ) [pure virtual]`

Solve operation for multiple right hand sides.

Solves the linear system $A * Sol = Rhs$ with multiple right hand sides. If necessary, A is factorized. Correct solutions are only guaranteed if the return values is SYMSOLVER_SUCCESS. The solver will return SYMSOLVER_SINGULAR if the linear system is singular, and it will return SYMSOLVER_WRONG_INERTIA if check_NegEvals is true and the number of negative eigenvalues in the matrix does not match numberOfNegEvals.

check_NegEvals cannot be chosen true, if [ProvidesInertia\(\)](#) returns false.

Implemented in [Ipopt::TSymLinearSolver](#).

3.165.2.2 `ESymSolverStatus Ipopt::SymLinearSolver::Solve ( const SymMatrix & A, const Vector & rhs, Vector & sol, bool check_NegEvals, Index numberOfNegEvals ) [inline]`

Solve operation for a single right hand side.

Solves the linear system $A * Sol = Rhs$. See MultiSolve for more details.

Definition at line 89 of file IpSymLinearSolver.hpp.

3.165.2.3 `virtual Index Ipopt::SymLinearSolver::NumberOfNegEvals ( ) const [pure virtual]`

Number of negative eigenvalues detected during last factorization.

Returns the number of negative eigenvalues of the most recent factorized matrix. This must not be called if the linear solver does not compute this quantities (see ProvidesInertia).

Implemented in [Ipopt::TSymLinearSolver](#).

3.165.2.4 `virtual bool Ipopt::SymLinearSolver::IncreaseQuality ( ) [pure virtual]`

Request to increase quality of solution for next solve.

Ask linear solver to increase quality of solution for the next solve (e.g. increase pivot tolerance). Returns false, if this is not possible (e.g. maximal pivot tolerance already used.)

Implemented in [Ipopt::TSymLinearSolver](#).

3.165.2.5 `virtual bool Ipopt::SymLinearSolver::ProvidesInertia ( ) const` [pure virtual]

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implemented in [Ipopt::TSymLinearSolver](#).

The documentation for this class was generated from the following file:


- IpSymLinearSolver.hpp

3.166 Ipopt::SymMatrix Class Reference

This is the base class for all derived symmetric matrix types.

```
#include <IpSymMatrix.hpp>
```

Inheritance diagram for Ipopt::SymMatrix:

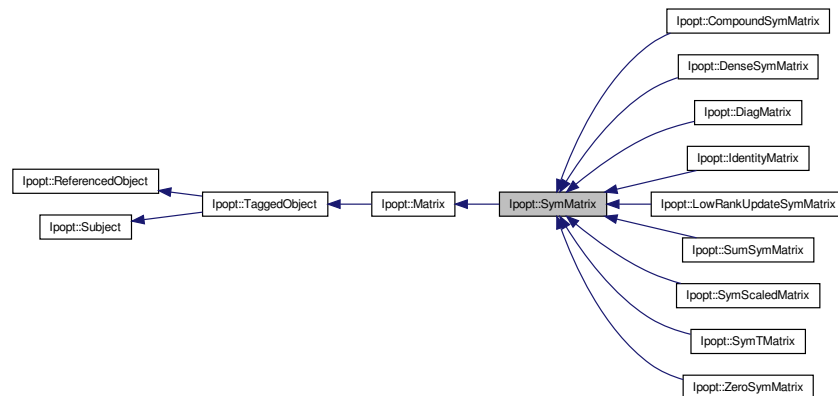

Public Member Functions

Constructor/Destructor

- [SymMatrix](#) (const [SymMatrixSpace](#) *owner_space)
Constructor, taking the owner_space.
- `virtual ~SymMatrix ()`
Destructor.

Information about the size of the matrix

- `Index Dim () const`
Dimension of the matrix (number of rows and columns)

Protected Member Functions

Overloaded methods from Matrix.

- virtual void [TransMultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Since the matrix is symmetric, it is only necessary to implement the MultVectorImpl method in a class that inherits from this base class.
- virtual void [ComputeColAMaxImpl](#) ([Vector](#) &cols_norms, bool init) const
Since the matrix is symmetric, the row and column max norms are identical.

Additional Inherited Members

3.166.1 Detailed Description

This is the base class for all derived symmetric matrix types.

Definition at line 23 of file IpSymMatrix.hpp.

3.166.2 Member Function Documentation

3.166.2.1 virtual void Ipopt::SymMatrix::TransMultVectorImpl (Number *alpha*, const [Vector](#) & *x*, Number *beta*, [Vector](#) & *y*) const
[inline], [protected], [virtual]

Since the matrix is symmetric, it is only necessary to implement the MultVectorImpl method in a class that inherits from this base class.

If the TransMultVectorImpl is called, this base class automatically calls MultVectorImpl instead.

Implements [Ipopt::Matrix](#).

Reimplemented in [Ipopt::ZeroSymMatrix](#).

Definition at line 56 of file IpSymMatrix.hpp.

The documentation for this class was generated from the following file:


- IpSymMatrix.hpp

3.167 Ipopt::SymMatrixSpace Class Reference

[SymMatrixSpace](#) base class, corresponding to the [SymMatrix](#) base class.

```
#include <IpSymMatrix.hpp>
```

Inheritance diagram for Ipopt::SymMatrixSpace:

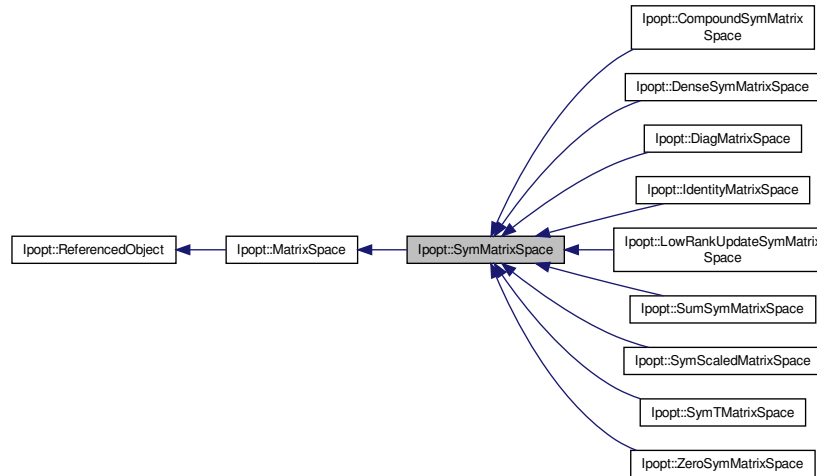

Public Member Functions

- virtual [SymMatrix](#) * [MakeNewSymMatrix](#) () const =0
Pure virtual method for creating a new matrix of this specific type.
- virtual [Matrix](#) * [MakeNew](#) () const
Overloaded MakeNew method for the [MatrixSpace](#) base class.
- Index [Dim](#) () const
Accessor method for the dimension of the matrices in this matrix space.

Constructors/Destructors

- [SymMatrixSpace](#) (Index dim)
Constructor, given the dimension (identical to the number of rows and columns).
- virtual [~SymMatrixSpace](#) ()
Destructor.

3.167.1 Detailed Description

[SymMatrixSpace](#) base class, corresponding to the [SymMatrix](#) base class.

Definition at line 81 of file IpSymMatrix.hpp.

3.167.2 Member Function Documentation

3.167.2.1 virtual [SymMatrix](#)* [Ipopt::SymMatrixSpace::MakeNewSymMatrix](#) () const [pure virtual]

Pure virtual method for creating a new matrix of this specific type.

Implemented in [Ipopt::CompoundSymMatrixSpace](#), [Ipopt::SymTMatrixSpace](#), [Ipopt::LowRankUpdateSymMatrixSpace](#), [Ipopt::DenseSymMatrixSpace](#), [Ipopt::SymScaledMatrixSpace](#), [Ipopt::SumSymMatrixSpace](#), [Ipopt::IdentityMatrixSpace](#), [Ipopt::DiagMatrixSpace](#), and [Ipopt::ZeroSymMatrixSpace](#).

The documentation for this class was generated from the following file:


- IpSymMatrix.hpp

3.168 Ipopt::SymScaledMatrix Class Reference

Class for a [Matrix](#) in conjunction with its scaling factors for row and column scaling.

```
#include <IpSymScaledMatrix.hpp>
```

Inheritance diagram for Ipopt::SymScaledMatrix:

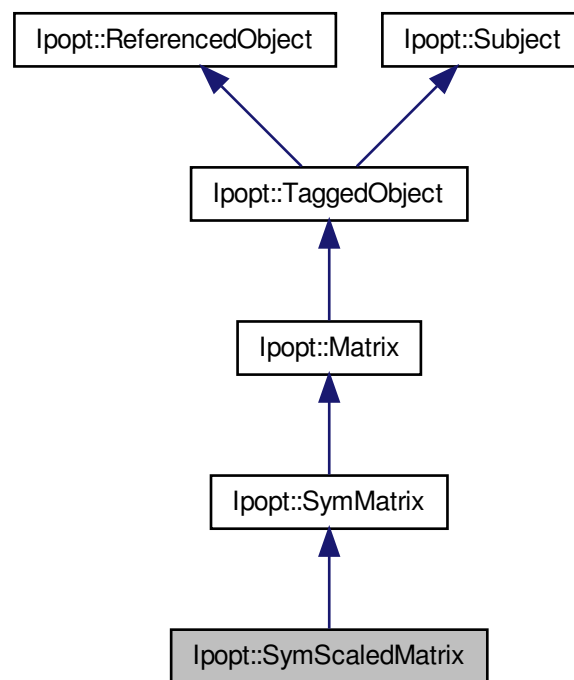

Public Member Functions

- void [SetUnscaledMatrix](#) (const [SmartPtr](#)< const [SymMatrix](#) > unscaled_matrix)
Set the unscaled matrix.
- void [SetUnscaledMatrixNonConst](#) (const [SmartPtr](#)< [SymMatrix](#) > &unscaled_matrix)
Set the unscaled matrix in a non-const version.
- [SmartPtr](#)< const [SymMatrix](#) > [GetUnscaledMatrix](#) () const
Return the unscaled matrix in const form.
- [SmartPtr](#)< [SymMatrix](#) > [GetUnscaledMatrixNonConst](#) ()
Return the unscaled matrix in non-const form.

- [SmartPtr](#)< const [Vector](#) > [RowColScaling](#) () const
return the vector for the row and column scaling

Constructors / Destructors

- [SymScaledMatrix](#) (const [SymScaledMatrixSpace](#) *owner_space)
Constructor, taking the owner_space.
- [~SymScaledMatrix](#) ()
Destructor.

Protected Member Functions

Methods overloaded from Matrix

- virtual void [MultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix-vector multiply.
- virtual bool [IsValidNumbersImpl](#) () const
Method for determining if all stored numbers are valid (i.e., no Inf or Nan).
- virtual void [ComputeRowAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const
Compute the max-norm of the rows in the matrix.
- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
Print detailed information about the matrix.

Additional Inherited Members

3.168.1 Detailed Description

Class for a [Matrix](#) in conjunction with its scaling factors for row and column scaling.

Operations on the matrix are performed using the scaled matrix. You can pull out the pointer to the unscaled matrix for unscaled calculations.

Definition at line 26 of file IpSymScaledMatrix.hpp.

3.168.2 Member Function Documentation

3.168.2.1 virtual void Ipopt::SymScaledMatrix::MultVectorImpl (Number *alpha*, const [Vector](#) & *x*, Number *beta*, [Vector](#) & *y*)
const [protected],[virtual]

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.168.2.2 virtual bool Ipopt::SymScaledMatrix::IsValidNumbersImpl () const [protected],[virtual]

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

It is assumed here that the scaling factors are always valid numbers.

Reimplemented from [Ipopt::Matrix](#).

3.168.2.3 `virtual void Ipopt::SymScaledMatrix::ComputeRowAMaxImpl ( Vector & rows_norms, bool init ) const`
`[protected], [virtual]`

Compute the max-norm of the rows in the matrix.

The result is stored in `rows_norms`. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.168.2.4 `virtual void Ipopt::SymScaledMatrix::PrintImpl ( const Journalist & jnlst, EJournalLevel level, EJournalCategory category, const std::string & name, Index indent, const std::string & prefix ) const` `[protected], [virtual]`

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

The documentation for this class was generated from the following file:


- `IpSymScaledMatrix.hpp`

3.169 Ipopt::SymScaledMatrixSpace Class Reference

This is the matrix space for [SymScaledMatrix](#).

```
#include <IpSymScaledMatrix.hpp>
```

Inheritance diagram for `Ipopt::SymScaledMatrixSpace`:

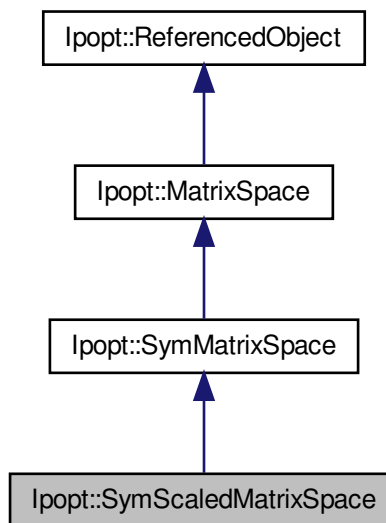

Public Member Functions

- [SymScaledMatrix](#) * [MakeNewSymScaledMatrix](#) (bool allocate_unscaled_matrix=false) const

Method for creating a new matrix of this specific type.

- virtual [SymMatrix](#) * [MakeNewSymMatrix](#) () const

Overloaded method from [SymMatrixSpace](#).

- virtual [Matrix](#) * [MakeNew](#) () const

Overloaded MakeNew method for the [MatrixSpace](#) base class.

- [SmartPtr](#)< const [Vector](#) > [RowColScaling](#) () const

return the vector for the row and column scaling

- [SmartPtr](#)< const [SymMatrixSpace](#) > [UnscaledMatrixSpace](#) () const

return the matrix space for the unscaled matrix

Constructors / Destructors

- [SymScaledMatrixSpace](#) (const [SmartPtr](#)< const [Vector](#) > &row_col_scaling, bool row_col_scaling_reciprocal, const [SmartPtr](#)< const [SymMatrixSpace](#) > &unscaled_matrix_space)

Constructor, given the number of row and columns blocks, as well as the total number of rows and columns.

- [~SymScaledMatrixSpace](#) ()

Destructor.

3.169.1 Detailed Description

This is the matrix space for [SymScaledMatrix](#).

Definition at line 107 of file IpSymScaledMatrix.hpp.

3.169.2 Member Function Documentation

3.169.2.1 [SymScaledMatrix](#)* Ipopt::SymScaledMatrixSpace::MakeNewSymScaledMatrix (bool *allocate_unscaled_matrix* = false) const [inline]

Method for creating a new matrix of this specific type.

Definition at line 134 of file IpSymScaledMatrix.hpp.

The documentation for this class was generated from the following file:


- IpSymScaledMatrix.hpp

3.170 Ipopt::SymTMatrix Class Reference

Class for symmetric matrices stored in triplet format.

```
#include <IpSymTMatrix.hpp>
```

Inheritance diagram for Ipopt::SymTMatrix:

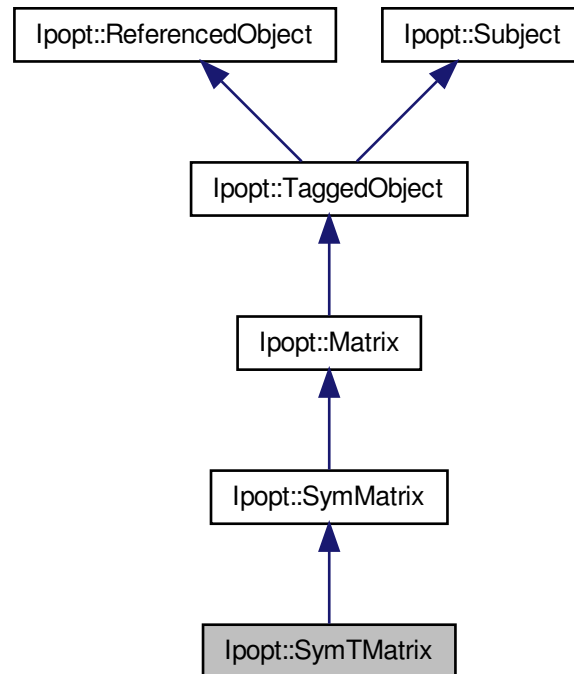

Public Member Functions

Constructors / Destructors

- [SymTMatrix](#) (const [SymTMatrixSpace](#) *owner_space)
Constructor, taking the corresponding matrix space.
- [~SymTMatrix](#) ()
Destructor.

Changing the Values.

- void [SetValues](#) (const Number *[Values](#))
Set values of nonzero elements.

Accessor Methods

- Index [Nonzeros](#) () const
Number of nonzero entries.
- const Index * [Irows](#) () const
Obtain pointer to the internal Index array irr_ without the intention to change the matrix data (USE WITH CARE!).
- const Index * [Jcols](#) () const

- Obtain pointer to the internal Index array `jcn_` without the intention to change the matrix data (USE WITH CARE!).
- Number * [Values](#) ()
Obtain pointer to the internal Number array `values_` with the intention to change the matrix data (USE WITH CARE!).
- const Number * [Values](#) () const
Obtain pointer to the internal Number array `values_` without the intention to change the matrix data (USE WITH CARE!).

Methods for providing copy of the matrix data

- void [FillStruct](#) (ipfint *Irn, ipfint *Jcn) const
Copy the nonzero structure into provided space.
- void [FillValues](#) (Number *[Values](#)) const
Copy the value data into provided space.

Protected Member Functions

Methods overloaded from matrix

- virtual void [MultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix-vector multiply.
- virtual bool [IsValidNumbersImpl](#) () const
Method for determining if all stored numbers are valid (i.e., no Inf or Nan).
- virtual void [ComputeRowAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const
Compute the max-norm of the rows in the matrix.
- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
Print detailed information about the matrix.

Additional Inherited Members

3.170.1 Detailed Description

Class for symmetric matrices stored in triplet format.

In the triplet format, the nonzeros elements of a symmetric matrix is stored in three arrays, `Irn`, `Jcn`, and `Values`, all of length `Nonzeros`. The first two arrays indicate the location of a non-zero element (as the row and column indices), and the last array stores the value at that location. Off-diagonal elements need to be stored only once since the matrix is symmetric. For example, the element $a_{1,2} = a_{2,1}$ would be stored only once, either with `Irn[i]=1` and `Jcn[i]=2`, or with `Irn[i]=2` and `Jcn[i]=1`. Both representations are identical. If nonzero elements (or their symmetric counter part) are listed more than once, their values are added.

The structure of the nonzeros (i.e. the arrays `Irn` and `Jcn`) cannot be changed after the matrix can be initialized. Only the values of the nonzero elements can be modified.

Note that the first row and column of a matrix has index 1, not 0.

Definition at line 42 of file `IpSymTMatrix.hpp`.

3.170.2 Member Function Documentation

3.170.2.1 void Ipopt::SymTMatrix::SetValues (const Number * [Values](#))

Set values of nonzero elements.

The values of the nonzero elements is copied from the incoming Number array. Important: It is assume that the order of the values in `Values` corresponds to the one of `Irn` and `Jcn` given to the matrix space.

3.170.2.2 `const Index * Ipopt::SymTMatrix::Irows ( ) const` `[inline]`

Obtain pointer to the internal Index array `irn_` without the intention to change the matrix data (USE WITH CARE!).

This does not produce a copy, and lifetime is not guaranteed!

Definition at line 240 of file `IpSymTMatrix.hpp`.

3.170.2.3 `const Index * Ipopt::SymTMatrix::Jcols ( ) const` `[inline]`

Obtain pointer to the internal Index array `jcn_` without the intention to change the matrix data (USE WITH CARE!).

This does not produce a copy, and lifetime is not guaranteed!

Definition at line 246 of file `IpSymTMatrix.hpp`.

3.170.2.4 `Number* Ipopt::SymTMatrix::Values ( )`

Obtain pointer to the internal Number array `values_` with the intention to change the matrix data (USE WITH CARE!).

This does not produce a copy, and lifetime is not guaranteed!

3.170.2.5 `const Number* Ipopt::SymTMatrix::Values ( ) const`

Obtain pointer to the internal Number array `values_` without the intention to change the matrix data (USE WITH CARE!).

This does not produce a copy, and lifetime is not guaranteed!

3.170.2.6 `virtual void Ipopt::SymTMatrix::MultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const` `[protected]`, `[virtual]`

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.170.2.7 `virtual bool Ipopt::SymTMatrix::IsValidNumbersImpl ( ) const` `[protected]`, `[virtual]`

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Reimplemented from [Ipopt::Matrix](#).

3.170.2.8 `virtual void Ipopt::SymTMatrix::ComputeRowAMaxImpl ( Vector & rows_norms, bool init ) const` `[protected]`, `[virtual]`

Compute the max-norm of the rows in the matrix.

The result is stored in `rows_norms`. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

3.170.2.9 `virtual void Ipopt::SymTMatrix::PrintImpl ( const Journalist & jnlst, EJournalLevel level, EJournalCategory category, const std::string & name, Index indent, const std::string & prefix ) const` `[protected]`, `[virtual]`

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

The documentation for this class was generated from the following file:


- `IpSymTMatrix.hpp`

3.171 Ipopt::SymTMatrixSpace Class Reference

This is the matrix space for a [SymTMatrix](#) with fixed sparsity structure.

```
#include <IpSymTMatrix.hpp>
```

Inheritance diagram for Ipopt::SymTMatrixSpace:

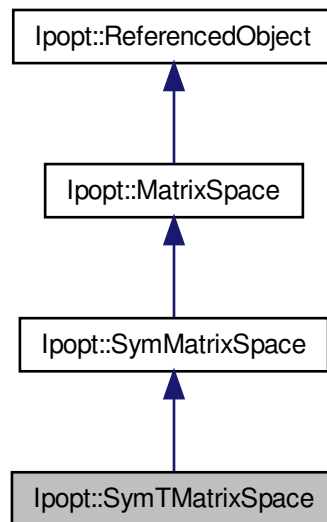

Public Member Functions

- virtual [SymMatrix](#) * [MakeNewSymMatrix](#) () const
Overloaded MakeNew method for the sYMMatrixSpace base class.
- [SymTMatrix](#) * [MakeNewSymTMatrix](#) () const
Method for creating a new matrix of this specific type.

Constructors / Destructors

- [SymTMatrixSpace](#) (Index dim, Index nonZeros, const Index *iRows, const Index *jCols)
Constructor, given the number of rows and columns (both as dim), as well as the number of nonzeros and the position of the nonzero elements.
- [~SymTMatrixSpace](#) ()
Destructor.

Methods describing Matrix structure

- Index [Nonzeros](#) () const
Number of non-zeros in the sparse matrix.
- const Index * [Irows](#) () const
Row index of each non-zero element.
- const Index * [Jcols](#) () const
Column index of each non-zero element.

3.171.1 Detailed Description

This is the matrix space for a [SymTMatrix](#) with fixed sparsity structure.

The sparsity structure is stored here in the matrix space.

Definition at line 161 of file IpSymTMatrix.hpp.

3.171.2 Constructor & Destructor Documentation

3.171.2.1 Ipopt::SymTMatrixSpace::SymTMatrixSpace (Index *dim*, Index *nonZeros*, const Index * *iRows*, const Index * *jCols*)

Constructor, given the number of rows and columns (both as dim), as well as the number of nonzeros and the position of the nonzero elements.

Note that the counting of the nonzeros starts a 1, i.e., `iRows[i]==1` and `jCols[i]==1` refers to the first element in the first row. This is in accordance with the HSL data structure. Off-diagonal elements are stored only once.

3.171.3 Member Function Documentation

3.171.3.1 SymTMatrix* Ipopt::SymTMatrixSpace::MakeNewSymTMatrix () const [inline]

Method for creating a new matrix of this specific type.

Definition at line 189 of file IpSymTMatrix.hpp.

The documentation for this class was generated from the following file:


- IpSymTMatrix.hpp

3.172 Ipopt::TaggedObject Class Reference

[TaggedObject](#) class.

```
#include <IpTaggedObject.hpp>
```

Inheritance diagram for Ipopt::TaggedObject:

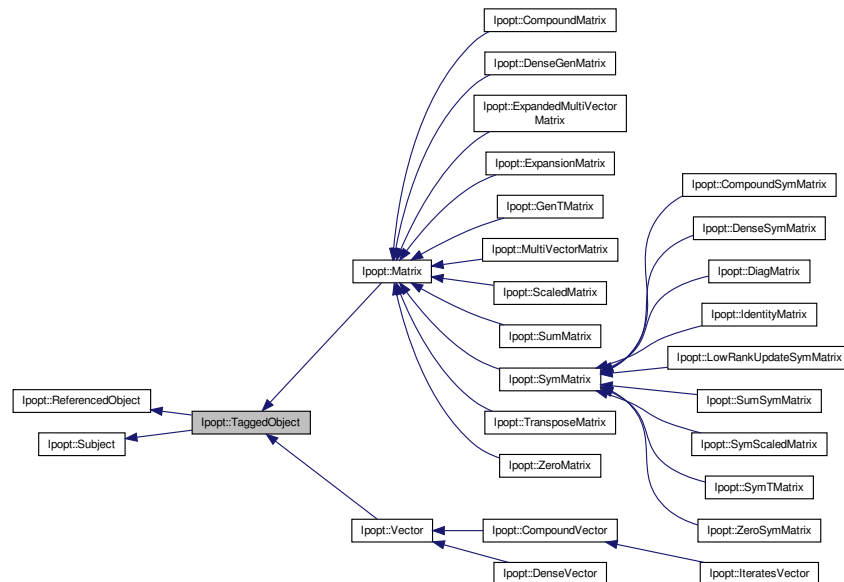

Public Types

- typedef unsigned int [Tag](#)
Type for the Tag values.

Public Member Functions

- [TaggedObject](#) ()
Constructor.
- virtual [~TaggedObject](#) ()
Destructor.
- [Tag](#) [GetTag](#) () const
Users of TaggedObjects call this to update their own internal tags every time they perform the expensive operation.
- bool [HasChanged](#) (const [Tag](#) comparison_tag) const
Users of TaggedObjects call this to check if the object HasChanged since they last updated their own internal tag.

Protected Member Functions

- void [ObjectChanged](#) ()
Objects derived from [TaggedObject](#) MUST call this method every time their internal state changes to update the internal tag for comparison.

3.172.1 Detailed Description

[TaggedObject](#) class.

Often, certain calculations or operations are expensive, and it can be very inefficient to perform these calculations again if the input to the calculation has not changed since the result was last stored. This base class provides an efficient mechanism to update a tag, indicating that the object has changed. Users of a [TaggedObject](#) class, need their own Tag data member to keep track of the state of the [TaggedObject](#), the last time they performed a calculation. A basic use case for users of a class inheriting from [TaggedObject](#) follows like this:

1. Initialize your own Tag to zero in constructor.

1. Before an expensive calculation, check if the [TaggedObject](#) has changed, passing in your own Tag, indicating the last time you used the object for the calculation. If it has changed, perform the calculation again, and store the result. If it has not changed, simply return the stored result.

Here is a simple example:

```
if (vector.HasChanged(my_vector_tag_)) {
    my_vector_tag_ = vector.GetTag();
    result = PerformExpensiveCalculation(vector);
    return result;
}
else {
    return result;
}
```

Objects derived from [TaggedObject](#) must indicate that they have changed to the base class using the protected member function [ObjectChanged\(\)](#). For example, a [Vector](#) class, inside its own set method, MUST call [ObjectChanged\(\)](#) to update the internally stored tag for comparison.

Definition at line 75 of file IpTaggedObject.hpp.

3.172.2 Constructor & Destructor Documentation

3.172.2.1 Ipopt::TaggedObject::TaggedObject () [inline]

Constructor.

Definition at line 82 of file IpTaggedObject.hpp.

3.172.2.2 virtual Ipopt::TaggedObject::~~TaggedObject () [inline],[virtual]

Destructor.

Definition at line 90 of file IpTaggedObject.hpp.

The documentation for this class was generated from the following file:


- IpTaggedObject.hpp

3.173 Ipopt::TDependencyDetector Class Reference

Base class for all derived algorithms for detecting linearly dependent rows in the constraint Jacobian.

```
#include <IpTDependencyDetector.hpp>
```

Inheritance diagram for Ipopt::TDependencyDetector:

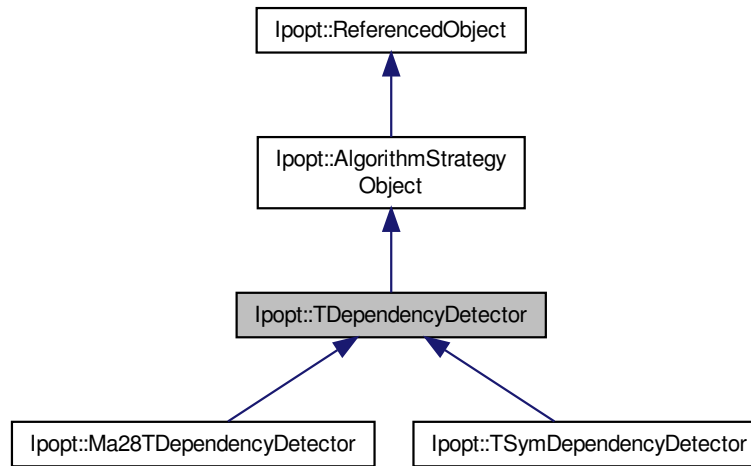

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
Has to be called to initialize and reset these objects.
- virtual bool [DetermineDependentRows](#) (Index n_rows, Index n_cols, Index n_jac_nz, Number *jac_c_vals, Index *jac_c_iRow, Index *jac_c_jCol, std::list< Index > &c_deps)=0
Method determining the number of linearly dependent rows in the matrix and the indices of those rows.

Constructor/Destructor

- **TDependencyDetector** ()
- virtual ~**TDependencyDetector** ()

Additional Inherited Members

3.173.1 Detailed Description

Base class for all derived algorithms for detecting linearly dependent rows in the constraint Jacobian.

Definition at line 20 of file IpTDependencyDetector.hpp.

3.173.2 Member Function Documentation

3.173.2.1 virtual bool Ipopt::TDependencyDetector::InitializeImpl (const [OptionsList](#) &options, const std::string &prefix)
[pure virtual]

Has to be called to initialize and reset these objects.

Implements [Ipopt::AlgorithmStrategyObject](#).

Implemented in [Ipopt::TSymDependencyDetector](#), and [Ipopt::Ma28TDependencyDetector](#).

3.173.2.2 virtual bool Ipopt::TDependencyDetector::DetermineDependentRows (Index *n_rows*, Index *n_cols*, Index *n_jac_nz*, Number * *jac_c_vals*, Index * *jac_c_iRow*, Index * *jac_c_jCol*, std::list< Index > & *c_deps*) [pure virtual]

Method determining the number of linearly dependent rows in the matrix and the indices of those rows.

We assume that the matrix is available in "Triplet" format (MA28 format), and that the arrays given to this method can be modified internally, i.e., they are not used by the calling program anymore after this call. This method returns false if there was a problem with the underlying linear solver.

Implemented in [Ipopt::TSymDependencyDetector](#), and [Ipopt::Ma28TDependencyDetector](#).

The documentation for this class was generated from the following file:

- IpTDependencyDetector.hpp

3.174 Ipopt::TimedTask Class Reference

This class is used to collect timing information for a particular task.

```
#include <IpTimedTask.hpp>
```

Public Member Functions

- void [Reset](#) ()
Method for resetting time to zero.
- void [Start](#) ()
Method that is called before execution of the task.
- void [End](#) ()
Method that is called after execution of the task.
- void [EndIfStarted](#) ()
Method that is called after execution of the task for which timing might have been started.
- Number [TotalCpuTime](#) () const
Method returning total CPU time spend for task so far.
- Number [TotalSysTime](#) () const
Method returning total system time spend for task so far.
- Number [TotalWallclockTime](#) () const
Method returning total wall clock time spend for task so far.

Constructors/Destructors

- [TimedTask](#) ()
Default constructor.
- [~TimedTask](#) ()
Default destructor.

3.174.1 Detailed Description

This class is used to collect timing information for a particular task.

Definition at line 18 of file IpTimedTask.hpp.

3.174.2 Constructor & Destructor Documentation

3.174.2.1 Ipopt::TimedTask::TimedTask () [inline]

Default constructor.

Definition at line 24 of file IpTimedTask.hpp.

3.174.3 Member Function Documentation

3.174.3.1 void Ipopt::TimedTask::Reset () [inline]

Method for resetting time to zero.

Definition at line 39 of file IpTimedTask.hpp.

3.174.3.2 void Ipopt::TimedTask::Start () [inline]

Method that is called before execution of the task.

Definition at line 49 of file IpTimedTask.hpp.

3.174.3.3 void Ipopt::TimedTask::End () [inline]

Method that is called after execution of the task.

Definition at line 61 of file IpTimedTask.hpp.

3.174.3.4 void Ipopt::TimedTask::EndIfStarted () [inline]

Method that is called after execution of the task for which timing might have been started.

This only updates the timing if the timing has indeed been conducted. This is useful to stop timing after catching exceptions.

Definition at line 76 of file IpTimedTask.hpp.

3.174.3.5 Number Ipopt::TimedTask::TotalCpuTime () const [inline]

Method returning total CPU time spend for task so far.

Definition at line 89 of file IpTimedTask.hpp.

3.174.3.6 Number Ipopt::TimedTask::TotalSysTime () const [inline]

Method returning total system time spend for task so far.

Definition at line 96 of file IpTimedTask.hpp.

3.174.3.7 Number Ipopt::TimedTask::TotalWallclockTime () const [inline]

Method returning total wall clock time spend for task so far.

Definition at line 103 of file IpTimedTask.hpp.

The documentation for this class was generated from the following file:


- IpTimedTask.hpp

3.175 Ipopt::TimingStatistics Class Reference

This class collects all timing statistics for Ipopt.

```
#include <IpTimingStatistics.hpp>
```

Inheritance diagram for Ipopt::TimingStatistics:



Public Member Functions

- void [ResetTimes](#) ()
Method for resetting all times.
- void [PrintAllTimingStatistics](#) ([Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category) const
Method for printing all timing information.

Constructors/Destructors

- [TimingStatistics](#) ()
Default constructor.
- virtual [~TimingStatistics](#) ()
Default destructor.

Accessor methods to all timed tasks.

- [TimedTask](#) & [OverallAlgorithm](#) ()
- [TimedTask](#) & [PrintProblemStatistics](#) ()
- [TimedTask](#) & [Initializeliterates](#) ()
- [TimedTask](#) & [UpdateHessian](#) ()
- [TimedTask](#) & [OutputIteration](#) ()
- [TimedTask](#) & [UpdateBarrierParameter](#) ()
- [TimedTask](#) & [ComputeSearchDirection](#) ()
- [TimedTask](#) & [ComputeAcceptableTrialPoint](#) ()
- [TimedTask](#) & [AcceptTrialPoint](#) ()
- [TimedTask](#) & [CheckConvergence](#) ()
- [TimedTask](#) & [PDSysstemSolverTotal](#) ()
- [TimedTask](#) & [PDSysstemSolverSolveOnce](#) ()
- [TimedTask](#) & [ComputeResiduals](#) ()
- [TimedTask](#) & [StdAugSystemSolverMultiSolve](#) ()
- [TimedTask](#) & [LinearSystemScaling](#) ()
- [TimedTask](#) & [LinearSystemSymbolicFactorization](#) ()

- [TimedTask](#) & [LinearSystemFactorization](#) ()
- [TimedTask](#) & [LinearSystemBackSolve](#) ()
- [TimedTask](#) & [LinearSystemStructureConverter](#) ()
- [TimedTask](#) & [LinearSystemStructureConverterInit](#) ()
- [TimedTask](#) & [QualityFunctionSearch](#) ()
- [TimedTask](#) & [TryCorrector](#) ()
- [TimedTask](#) & [Task1](#) ()
- [TimedTask](#) & [Task2](#) ()
- [TimedTask](#) & [Task3](#) ()
- [TimedTask](#) & [Task4](#) ()
- [TimedTask](#) & [Task5](#) ()
- [TimedTask](#) & [Task6](#) ()

3.175.1 Detailed Description

This class collects all timing statistics for Ipopt.

Definition at line 20 of file IpTimingStatistics.hpp.

3.175.2 Constructor & Destructor Documentation

3.175.2.1 Ipopt::TimingStatistics::TimingStatistics () [inline]

Default constructor.

Definition at line 26 of file IpTimingStatistics.hpp.

3.175.3 Member Function Documentation

3.175.3.1 void Ipopt::TimingStatistics::ResetTimes ()

Method for resetting all times.

The documentation for this class was generated from the following file:


- IpTimingStatistics.hpp

3.176 Ipopt::TNLP Class Reference

Base class for all [NLP](#)'s that use standard triplet matrix form and dense vectors.

```
#include <IpTNLP.hpp>
```

Inheritance diagram for Ipopt::TNLP:

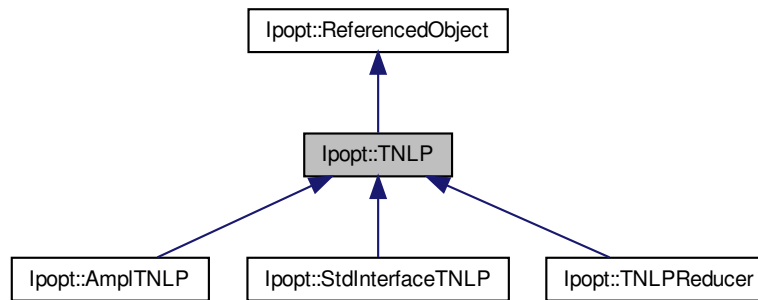

Public Types

- enum [LinearityType](#) { [LINEAR](#), [NON_LINEAR](#) }
Type of the constraints.

Public Member Functions

Constructors/Destructors

- **TNLP** ()
- virtual [~TNLP](#) ()
Default destructor.

Solution Methods

- virtual void [finalize_solution](#) (SolverReturn status, Index n, const Number *x, const Number *z_L, const Number *z_U, Index m, const Number *g, const Number *lambda, Number obj_value, const [IpoptData](#) *ip_data, [IpoptCalculatedQuantities](#) *ip_cq)=0
This method is called when the algorithm is complete so the [TNLP](#) can store/write the solution.
- virtual void [finalize_metadata](#) (Index n, const StringMetaDataMapType &var_string_md, const IntegerMetaDataMapType &var_integer_md, const NumericMetaDataMapType &var_numeric_md, Index m, const StringMetaDataMapType &con_string_md, const IntegerMetaDataMapType &con_integer_md, const NumericMetaDataMapType &con_numeric_md)
This method is called just before finalize_solution.
- virtual bool [intermediate_callback](#) (AlgorithmMode mode, Index iter, Number obj_value, Number inf_pr, Number inf_du, Number mu, Number d_norm, Number regularization_size, Number alpha_du, Number alpha_pr, Index ls_trials, const [IpoptData](#) *ip_data, [IpoptCalculatedQuantities](#) *ip_cq)
Intermediate Callback method for the user.

Methods for quasi-Newton approximation. If the second

derivatives are approximated by Ipopt, it is better to do this only in the space of nonlinear variables.

The following methods are call by Ipopt if the quasi-Newton approximation is selected. If -1 is returned as number of nonlinear variables, Ipopt assumes that all variables are nonlinear. Otherwise, it calls [get_list_of_nonlinear_variables](#)

with an array into which the indices of the nonlinear variables should be written - the array has the lengths `num_nonlin_vars`, which is identical with the return value of `get_number_of_nonlinear_variables()`. It is assumed that the indices are counted starting with 1 in the `FORTRAN_STYLE`, and 0 for the `C_STYLE`.

- virtual Index **get_number_of_nonlinear_variables** ()
- virtual bool **get_list_of_nonlinear_variables** (Index num_nonlin_vars, Index *pos_nonlin_vars)

methods to gather information about the NLP

- enum [IndexStyleEnum](#)
overload this method to return the number of variables and constraints, and the number of non-zeros in the jacobian and the hessian.
- typedef std::map< std::string, std::vector< std::string > > **StringMetaDataMapType**
- typedef std::map< std::string, std::vector< Index > > **IntegerMetaDataMapType**
- typedef std::map< std::string, std::vector< Number > > **NumericMetaDataMapType**
- virtual bool **get_nlp_info** (Index &n, Index &m, Index &nnz_jac_g, Index &nnz_h_lag, [IndexStyleEnum](#) &index_style)=0
- virtual bool **get_var_con_metadata** (Index n, StringMetaDataMapType &var_string_md, IntegerMetaDataMapType &var_integer_md, NumericMetaDataMapType &var_numeric_md, Index m, StringMetaDataMapType &con_string_md, IntegerMetaDataMapType &con_integer_md, NumericMetaDataMapType &con_numeric_md)
overload this method to return any meta data for the variables and the constraints
- virtual bool **get_bounds_info** (Index n, Number *x_l, Number *x_u, Index m, Number *g_l, Number *g_u)=0
overload this method to return the information about the bound on the variables and constraints.
- virtual bool **get_scaling_parameters** (Number &obj_scaling, bool &use_x_scaling, Index n, Number *x_scaling, bool &use_g_scaling, Index m, Number *g_scaling)
overload this method to return scaling parameters.
- virtual bool **get_variables_linearity** (Index n, [LinearityType](#) *var_types)
overload this method to return the variables linearity (`TNLP::LINEAR` or `TNLP::NON_LINEAR`).
- virtual bool **get_constraints_linearity** (Index m, [LinearityType](#) *const_types)
overload this method to return the constraint linearity.
- virtual bool **get_starting_point** (Index n, bool init_x, Number *x, bool init_z, Number *z_L, Number *z_U, Index m, bool init_lambda, Number *lambda)=0
overload this method to return the starting point.
- virtual bool **get_warm_start_iterate** ([IteratesVector](#) &warm_start_iterate)
overload this method to provide an Ipopt iterate (already in the form Ipopt requires it internally) for a warm start.
- virtual bool **eval_f** (Index n, const Number *x, bool new_x, Number &obj_value)=0
overload this method to return the value of the objective function
- virtual bool **eval_grad_f** (Index n, const Number *x, bool new_x, Number *grad_f)=0
overload this method to return the vector of the gradient of the objective w.r.t.
- virtual bool **eval_g** (Index n, const Number *x, bool new_x, Index m, Number *g)=0
overload this method to return the vector of constraint values
- virtual bool **eval_jac_g** (Index n, const Number *x, bool new_x, Index m, Index nele_jac, Index *iRow, Index *jCol, Number *values)=0
overload this method to return the jacobian of the constraints.
- virtual bool **eval_h** (Index n, const Number *x, bool new_x, Number obj_factor, Index m, const Number *lambda, bool new_lambda, Index nele_hess, Index *iRow, Index *jCol, Number *values)
overload this method to return the hessian of the lagrangian.

3.176.1 Detailed Description

Base class for all [NLP](#)'s that use standard triplet matrix form and dense vectors.

This is the standard base class for all [NLP](#)'s that use the standard triplet matrix form (as for Harwell routines) and dense vectors. The class [TNLPAdapter](#) then converts this interface to an interface that can be used directly by ipopt.

This interface presents the problem form:

$$\begin{aligned} \min f(x) \\ \text{s.t. } g_L \leq g(x) \leq g_U \\ x_L \leq x \leq x_U \end{aligned}$$

In order to specify an equality constraint, set $g_{L,i} = g_{U,i} = \text{rhs}$. The value that indicates "infinity" for the bounds (i.e. the variable or constraint has no lower bound (-infinity) or upper bound (+infinity)) is set through the option `nlp_lower_bound_inf` and `nlp_upper_bound_inf`. To indicate that a variable has no upper or lower bound, set the bound to `-ipopt_inf` or `+ipopt_inf` respectively

Definition at line 50 of file `IpTNLP.hpp`.

3.176.2 Member Enumeration Documentation

3.176.2.1 enum Ipopt::TNLP::LinearityType

Type of the constraints.

Enumerator:

LINEAR Constraint/Variable is linear.
NON_LINEAR Constraint/Variable is non-linear.

Definition at line 54 of file `IpTNLP.hpp`.

3.176.2.2 enum Ipopt::TNLP::IndexStyleEnum

overload this method to return the number of variables and constraints, and the number of non-zeros in the jacobian and the hessian.

The `index_style` parameter lets you specify C or Fortran style indexing for the sparse matrix `iRow` and `jCol` parameters. `C_STYLE` is 0-based, and `FORTTRAN_STYLE` is 1-based.

Definition at line 80 of file `IpTNLP.hpp`.

3.176.3 Member Function Documentation

3.176.3.1 virtual bool Ipopt::TNLP::get_bounds_info (Index *n*, Number * *x_l*, Number * *x_u*, Index *m*, Number * *g_l*, Number * *g_u*) [pure virtual]

overload this method to return the information about the bound on the variables and constraints.

The value that indicates that a bound does not exist is specified in the parameters `nlp_lower_bound_inf` and `nlp_upper_bound_inf`. By default, `nlp_lower_bound_inf` is -1e19 and `nlp_upper_bound_inf` is 1e19. (see [TNLPAdapter](#))

Implemented in [Ipopt::AmplTNLP](#), [Ipopt::StdInterfaceTNLP](#), and [Ipopt::TNLPReducer](#).

3.176.3.2 `virtual bool Ipopt::TNLP::get_scaling_parameters ( Number & obj_scaling, bool & use_x_scaling, Index n, Number * x_scaling, bool & use_g_scaling, Index m, Number * g_scaling )` `[inline], [virtual]`

overload this method to return scaling parameters.

This is only called if the options are set to retrieve user scaling. There, `use_x_scaling` (or `use_g_scaling`) should get set to true only if the variables (or constraints) are to be scaled. This method should return true only if the scaling parameters could be provided.

Reimplemented in [Ipopt::AmplTNLP](#), [Ipopt::StdInterfaceTNLP](#), and [Ipopt::TNLPReducer](#).

Definition at line 119 of file `IpTNLP.hpp`.

3.176.3.3 `virtual bool Ipopt::TNLP::get_variables_linearity ( Index n, LinearityType * var_types )` `[inline], [virtual]`

overload this method to return the variables linearity ([TNLP::LINEAR](#) or [TNLP::NON_LINEAR](#)).

The `var_types` array has been allocated with length at least `n`. (default implementation just return false and does not fill the array).

Reimplemented in [Ipopt::TNLPReducer](#).

Definition at line 132 of file `IpTNLP.hpp`.

3.176.3.4 `virtual bool Ipopt::TNLP::get_constraints_linearity ( Index m, LinearityType * const_types )` `[inline], [virtual]`

overload this method to return the constraint linearity.

array has been allocated with length at least `n`. (default implementation just return false and does not fill the array).

Reimplemented in [Ipopt::AmplTNLP](#), and [Ipopt::TNLPReducer](#).

Definition at line 140 of file `IpTNLP.hpp`.

3.176.3.5 `virtual bool Ipopt::TNLP::get_starting_point ( Index n, bool init_x, Number * x, bool init_z, Number * z_L, Number * z_U, Index m, bool init_lambda, Number * lambda )` `[pure virtual]`

overload this method to return the starting point.

The bool variables indicate whether the algorithm wants you to initialize `x`, `z_L/z_u`, and `lambda`, respectively. If, for some reason, the algorithm wants you to initialize these and you cannot, return false, which will cause Ipopt to stop. You will have to run Ipopt with different options then.

Implemented in [Ipopt::AmplTNLP](#), [Ipopt::StdInterfaceTNLP](#), and [Ipopt::TNLPReducer](#).

3.176.3.6 `virtual bool Ipopt::TNLP::get_warm_start_iterate ( IteratesVector & warm_start_iterate )` `[inline], [virtual]`

overload this method to provide an Ipopt iterate (already in the form Ipopt requires it internally) for a warm start.

Since this is only for expert users, a default dummy implementation is provided and returns false.

Reimplemented in [Ipopt::TNLPReducer](#).

Definition at line 161 of file `IpTNLP.hpp`.

3.176.3.7 `virtual bool Ipopt::TNLP::eval_grad_f ( Index n, const Number * x, bool new_x, Number * grad_f )` `[pure virtual]`

overload this method to return the vector of the gradient of the objective w.r.t.

`x`

Implemented in [Ipopt::AmplTNLP](#), [Ipopt::StdInterfaceTNLP](#), and [Ipopt::TNLPReducer](#).

3.176.3.8 `virtual bool Ipopt::TNLP::eval_jac_g ( Index n, const Number * x, bool new_x, Index m, Index nele_jac, Index * iRow, Index * jCol, Number * values ) [pure virtual]`

overload this method to return the jacobian of the constraints.

The vectors *iRow* and *jCol* only need to be set once. The first call is used to set the structure only (*iRow* and *jCol* will be non-NULL, and values will be NULL) For subsequent calls, *iRow* and *jCol* will be NULL.

Implemented in [Ipopt::AmplTNLP](#), [Ipopt::StdInterfaceTNLP](#), and [Ipopt::TNLPReducer](#).

3.176.3.9 `virtual bool Ipopt::TNLP::eval_h ( Index n, const Number * x, bool new_x, Number obj_factor, Index m, const Number * lambda, bool new_lambda, Index nele_hess, Index * iRow, Index * jCol, Number * values ) [inline], [virtual]`

overload this method to return the hessian of the lagrangian.

The vectors *iRow* and *jCol* only need to be set once (during the first call). The first call is used to set the structure only (*iRow* and *jCol* will be non-NULL, and values will be NULL) For subsequent calls, *iRow* and *jCol* will be NULL. This matrix is symmetric - specify the lower diagonal only. A default implementation is provided, in case the user wants to use quasi-Newton approximations to estimate the second derivatives and doesn't need to implement this method.

Reimplemented in [Ipopt::AmplTNLP](#), [Ipopt::StdInterfaceTNLP](#), and [Ipopt::TNLPReducer](#).

Definition at line 196 of file `IpTNLP.hpp`.

3.176.3.10 `virtual void Ipopt::TNLP::finalize_metadata (Index n, const StringMetaDataMapType & var_string_md, const IntegerMetaDataMapType & var_integer_md, const NumericMetaDataMapType & var_numeric_md, Index m, const StringMetaDataMapType & con_string_md, const IntegerMetaDataMapType & con_integer_md, const NumericMetaDataMapType & con_numeric_md) [inline], [virtual]`

This method is called just before `finalize_solution`.

With this method, the algorithm returns any metadata collected during its run, including the metadata provided by the user with the above `get_var_con_metadata`. Each metadata can be of type string, integer, and numeric. It can be associated to either the variables or the constraints. The metadata that was associated with the primal variable vector is stored in `var_..._md`. The metadata associated with the constraint multipliers is stored in `con_..._md`. The metadata associated with the bound multipliers is stored in `var_..._md`, with the suffixes "`_z_L`", and "`_z_U`", denoting lower and upper bounds.

Definition at line 226 of file `IpTNLP.hpp`.

3.176.3.11 `virtual bool Ipopt::TNLP::intermediate_callback (AlgorithmMode mode, Index iter, Number obj_value, Number inf_pr, Number inf_du, Number mu, Number d_norm, Number regularization_size, Number alpha_du, Number alpha_pr, Index ls_trials, const IpoptData * ip_data, IpoptCalculatedQuantities * ip_cq) [inline], [virtual]`

Intermediate Callback method for the user.

Providing dummy default implementation. For details see `IntermediateCallBack` in [IpNLP.hpp](#).

Reimplemented in [Ipopt::StdInterfaceTNLP](#), and [Ipopt::TNLPReducer](#).

Definition at line 240 of file `IpTNLP.hpp`.

The documentation for this class was generated from the following file:


- `IpTNLP.hpp`

3.177 Ipopt::TNLPAdapter Class Reference

This class Adapts the [TNLP](#) interface so it looks like an [NLP](#) interface.

```
#include <IpTNLPAdapter.hpp>
```

Inheritance diagram for Ipopt::TNLPAdapter:

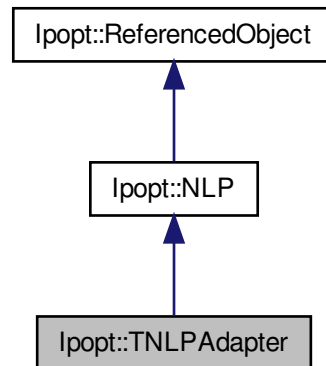

Public Types

- enum [FixedVariableTreatmentEnum](#)
Enum for treatment of fixed variables option.
- enum [DerivativeTestEnum](#)
Enum for specifying which derivative test is to be performed.
- enum [JacobianApproxEnum](#)
Enum for specifying technique for computing Jacobian.

Public Member Functions

- virtual void [GetQuasiNewtonApproximationSpaces](#) (SmartPtr< [VectorSpace](#) > &approx_space, SmartPtr< [Matrix](#) > &P_approx)
Method returning information on quasi-Newton approximation.
- bool [CheckDerivatives](#) ([DerivativeTestEnum](#) deriv_test, Index deriv_test_start_index)
Method for performing the derivative test.
- [SmartPtr](#)< [TNLP](#) > [tnlp](#) () const
Accessor method for the underlying [TNLP](#).

Constructors/Destructors

- [TNLPAdapter](#) (const [SmartPtr](#)< [TNLP](#) > [tnlp](#), const [SmartPtr](#)< const [Journalist](#) > jnlst=NULL)
Default constructor.
- virtual [~TNLPAdapter](#) ()
Default destructor.

Exceptions

- **DECLARE_STD_EXCEPTION** (INVALID_TNLP)
- **DECLARE_STD_EXCEPTION** (ERROR_IN_TNLP_DERIVATIVE_TEST)

TNLPAdapter Initialization.

- virtual bool **ProcessOptions** (const **OptionsList** &options, const std::string &prefix)
Overload if you want the chance to process options or parameters that may be specific to the NLP.
- virtual bool **GetSpaces** (**SmartPtr**< const **VectorSpace** > &x_space, **SmartPtr**< const **VectorSpace** > &c_space, **SmartPtr**< const **VectorSpace** > &d_space, **SmartPtr**< const **VectorSpace** > &x_l_space, **SmartPtr**< const **MatrixSpace** > &px_l_space, **SmartPtr**< const **VectorSpace** > &x_u_space, **SmartPtr**< const **MatrixSpace** > &px_u_space, **SmartPtr**< const **VectorSpace** > &d_l_space, **SmartPtr**< const **MatrixSpace** > &pd_l_space, **SmartPtr**< const **VectorSpace** > &d_u_space, **SmartPtr**< const **MatrixSpace** > &pd_u_space, **SmartPtr**< const **MatrixSpace** > &Jac_c_space, **SmartPtr**< const **MatrixSpace** > &Jac_d_space, **SmartPtr**< const **SymMatrixSpace** > &Hess_lagrangian_space)
Method for creating the derived vector / matrix types (Do not delete these, the).
- virtual bool **GetBoundsInformation** (const **Matrix** &Px_L, **Vector** &x_L, const **Matrix** &Px_U, **Vector** &x_U, const **Matrix** &Pd_L, **Vector** &d_L, const **Matrix** &Pd_U, **Vector** &d_U)
Method for obtaining the bounds information.
- virtual bool **GetStartingPoint** (**SmartPtr**< **Vector** > x, bool need_x, **SmartPtr**< **Vector** > y_c, bool need_y_c, **SmartPtr**< **Vector** > y_d, bool need_y_d, **SmartPtr**< **Vector** > z_L, bool need_z_L, **SmartPtr**< **Vector** > z_U, bool need_z_U)
Method for obtaining the starting point for all the iterates.
- virtual bool **GetWarmStartIterate** (**IteratesVector** &warm_start_iterate)
Method for obtaining an entire iterate as a warmstart point.

TNLPAdapter evaluation routines.

- virtual bool **Eval_f** (const **Vector** &x, Number &f)
- virtual bool **Eval_grad_f** (const **Vector** &x, **Vector** &g_f)
- virtual bool **Eval_c** (const **Vector** &x, **Vector** &c)
- virtual bool **Eval_jac_c** (const **Vector** &x, **Matrix** &jac_c)
- virtual bool **Eval_d** (const **Vector** &x, **Vector** &d)
- virtual bool **Eval_jac_d** (const **Vector** &x, **Matrix** &jac_d)
- virtual bool **Eval_h** (const **Vector** &x, Number obj_factor, const **Vector** &yc, const **Vector** &yd, **SymMatrix** &h)
- virtual void **GetScalingParameters** (const **SmartPtr**< const **VectorSpace** > x_space, const **SmartPtr**< const **VectorSpace** > c_space, const **SmartPtr**< const **VectorSpace** > d_space, Number &obj_scaling, **SmartPtr**< **Vector** > &x_scaling, **SmartPtr**< **Vector** > &c_scaling, **SmartPtr**< **Vector** > &d_scaling) const
Routines to get the scaling parameters.

Solution Reporting Methods

- virtual void **FinalizeSolution** (SolverReturn status, const **Vector** &x, const **Vector** &z_L, const **Vector** &z_U, const **Vector** &c, const **Vector** &d, const **Vector** &y_c, const **Vector** &y_d, Number obj_value, const **IpoptData** *ip_data, **IpoptCalculatedQuantities** *ip_cq)
This method is called at the very end of the optimization.
- virtual bool **IntermediateCallBack** (AlgorithmMode mode, Index iter, Number obj_value, Number inf_pr, Number inf_du, Number mu, Number d_norm, Number regularization_size, Number alpha_du, Number alpha_pr, Index ls_trials, const **IpoptData** *ip_data, **IpoptCalculatedQuantities** *ip_cq)
This method is called once per iteration, after the iteration summary output has been printed.

Methods for translating data for IpoptNLP into the TNLP

data.

These methods are used to obtain the current (or final) data for the **TNLP** formulation from the **IpoptNLP** structure.

- void **ResortX** (const **Vector** &x, Number *x_orig)
Sort the primal variables, and add the fixed values in x.
- void **ResortG** (const **Vector** &c, const **Vector** &d, Number *g_orig)
- void **ResortBnds** (const **Vector** &x_L, Number *x_L_orig, const **Vector** &x_U, Number *x_U_orig)

Static Public Member Functions

Methods for IpoptType

- static void **RegisterOptions** ([SmartPtr](#)< [RegisteredOptions](#) > roptions)

3.177.1 Detailed Description

This class Adapts the [TNLP](#) interface so it looks like an [NLP](#) interface.

This is an Adapter class (Design Patterns) that converts a [TNLP](#) to an [NLP](#). This allows users to write to the "more convenient" [TNLP](#) interface.

Definition at line 30 of file IpTNLPAdapter.hpp.

3.177.2 Member Enumeration Documentation

3.177.2.1 enum Ipopt::TNLPAdapter::DerivativeTestEnum

Enum for specifying which derivative test is to be performed.

Definition at line 167 of file IpTNLPAdapter.hpp.

3.177.3 Member Function Documentation

3.177.3.1 virtual bool Ipopt::TNLPAdapter::GetSpaces ([SmartPtr](#)< const [VectorSpace](#) > & *x_space*, [SmartPtr](#)< const [VectorSpace](#) > & *c_space*, [SmartPtr](#)< const [VectorSpace](#) > & *d_space*, [SmartPtr](#)< const [VectorSpace](#) > & *x_l_space*, [SmartPtr](#)< const [MatrixSpace](#) > & *px_l_space*, [SmartPtr](#)< const [VectorSpace](#) > & *x_u_space*, [SmartPtr](#)< const [MatrixSpace](#) > & *px_u_space*, [SmartPtr](#)< const [VectorSpace](#) > & *d_l_space*, [SmartPtr](#)< const [MatrixSpace](#) > & *pd_l_space*, [SmartPtr](#)< const [VectorSpace](#) > & *d_u_space*, [SmartPtr](#)< const [MatrixSpace](#) > & *pd_u_space*, [SmartPtr](#)< const [MatrixSpace](#) > & *Jac_c_space*, [SmartPtr](#)< const [MatrixSpace](#) > & *Jac_d_space*, [SmartPtr](#)< const [SymMatrixSpace](#) > & *Hess_lagrangian_space*) [virtual]

Method for creating the derived vector / matrix types (Do not delete these, the).

Implements [Ipopt::NLP](#).

3.177.3.2 virtual bool Ipopt::TNLPAdapter::GetStartingPoint ([SmartPtr](#)< [Vector](#) > *x*, bool *need_x*, [SmartPtr](#)< [Vector](#) > *y_c*, bool *need_y_c*, [SmartPtr](#)< [Vector](#) > *y_d*, bool *need_y_d*, [SmartPtr](#)< [Vector](#) > *z_L*, bool *need_z_L*, [SmartPtr](#)< [Vector](#) > *z_U*, bool *need_z_U*) [virtual]

Method for obtaining the starting point for all the iterates.

Implements [Ipopt::NLP](#).

3.177.3.3 virtual bool Ipopt::TNLPAdapter::GetWarmStartIterate ([IteratesVector](#) & *warm.start.iterate*) [virtual]

Method for obtaining an entire iterate as a warmstart point.

The incoming [IteratesVector](#) has to be filled.

Reimplemented from [Ipopt::NLP](#).

```
3.177.3.4 virtual void Ipopt::TNLPAdapter::GetScalingParameters ( const SmartPtr< const VectorSpace > x_space, const
SmartPtr< const VectorSpace > c_space, const SmartPtr< const VectorSpace > d_space, Number &
obj_scaling, SmartPtr< Vector > & x_scaling, SmartPtr< Vector > & c_scaling, SmartPtr< Vector > &
d_scaling ) const [virtual]
```

Routines to get the scaling parameters.

These do not need to be overloaded unless the options are set for User scaling

Reimplemented from [Ipopt::NLP](#).

```
3.177.3.5 virtual void Ipopt::TNLPAdapter::FinalizeSolution ( SolverReturn status, const Vector & x, const Vector & z_L, const
Vector & z_U, const Vector & c, const Vector & d, const Vector & y_c, const Vector & y_d, Number obj_value,
const IpoptData * ip_data, IpoptCalculatedQuantities * ip_cq ) [virtual]
```

This method is called at the very end of the optimization.

It provides the final iterate to the user, so that it can be stored as the solution. The status flag indicates the outcome of the optimization, where SolverReturn is defined in [IpAlgTypes.hpp](#).

Reimplemented from [Ipopt::NLP](#).

```
3.177.3.6 virtual bool Ipopt::TNLPAdapter::IntermediateCallBack ( AlgorithmMode mode, Index iter, Number obj_value, Number
inf_pr, Number inf_du, Number mu, Number d_norm, Number regularization_size, Number alpha_du, Number alpha_pr,
Index ls_trials, const IpoptData * ip_data, IpoptCalculatedQuantities * ip_cq ) [virtual]
```

This method is called once per iteration, after the iteration summary output has been printed.

It provides the current information to the user to do with it anything she wants. It also allows the user to ask for a premature termination of the optimization by returning false, in which case Ipopt will terminate with a corresponding return status. The basic information provided in the argument list has the quantities values printed in the iteration summary line. If more information is required, a user can obtain it from the IpData and IpCalculatedQuantities objects. However, note that the provided quantities are all for the problem that Ipopt sees, i.e., the quantities might be scaled, fixed variables might be sorted out, etc. The status indicates things like whether the algorithm is in the restoration phase... In the restoration phase, the dual variables are probably not changing.

Reimplemented from [Ipopt::NLP](#).

```
3.177.3.7 virtual void Ipopt::TNLPAdapter::GetQuasiNewtonApproximationSpaces ( SmartPtr< VectorSpace > & approx_space,
SmartPtr< Matrix > & P_approx ) [virtual]
```

Method returning information on quasi-Newton approximation.

Reimplemented from [Ipopt::NLP](#).

```
3.177.3.8 SmartPtr<TNLP> Ipopt::TNLPAdapter::tnlp ( ) const [inline]
```

Accessor method for the underlying [TNLP](#).

Definition at line 192 of file [IpTNLPAdapter.hpp](#).

The documentation for this class was generated from the following file:


- [IpTNLPAdapter.hpp](#)

3.178 Ipopt::TNLPReducer Class Reference

This is a wrapper around a given [TNLP](#) class that takes out a list of constraints that are given to the constructor.

```
#include <IpTNLPReducer.hpp>
```

Inheritance diagram for Ipopt::TNLPReducer:

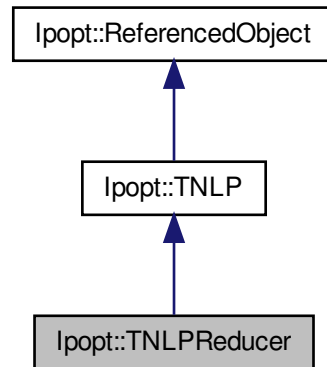

Public Member Functions

Constructors/Destructors

- **TNLPReducer** (**TNLP** &tnlp, Index n_g_skip, const Index *index_g_skip, Index n_xL_skip, const Index *index_xL_skip, Index n_xU_skip, const Index *index_xU_skip, Index n_x_fix, const Index *index_f_fix)
*Constructor is given the indices of the constraints that should be taken out of the problem statement, as well as the original **TNLP**.*
- virtual **~TNLPReducer** ()
Default destructor.

Overloaded methods from TNLP

- virtual bool **get_nlp_info** (Index &n, Index &m, Index &nnz_jac_g, Index &nnz_h_lag, **IndexStyleEnum** &index_style)
- virtual bool **get_bounds_info** (Index n, Number *x_l, Number *x_u, Index m, Number *g_l, Number *g_u)
overload this method to return the information about the bound on the variables and constraints.
- virtual bool **get_scaling_parameters** (Number &obj_scaling, bool &use_x_scaling, Index n, Number *x_scaling, bool &use_g_scaling, Index m, Number *g_scaling)
overload this method to return scaling parameters.
- virtual bool **get_variables_linearity** (Index n, **LinearityType** *var_types)
*overload this method to return the variables linearity (**TNLP::LINEAR** or **TNLP::NON_LINEAR**).*
- virtual bool **get_constraints_linearity** (Index m, **LinearityType** *const_types)
overload this method to return the constraint linearity.
- virtual bool **get_starting_point** (Index n, bool init_x, Number *x, bool init_z, Number *z_L, Number *z_U, Index m, bool init_lambda, Number *lambda)
overload this method to return the starting point.
- virtual bool **get_warm_start_iterate** (**IteratesVector** &warm_start_iterate)
overload this method to provide an Ipopt iterate (already in the form Ipopt requires it internally) for a warm start.
- virtual bool **eval_f** (Index n, const Number *x, bool new_x, Number &obj_value)
overload this method to return the value of the objective function
- virtual bool **eval_grad_f** (Index n, const Number *x, bool new_x, Number *grad_f)

- overload this method to return the vector of the gradient of the objective w.r.t.*
- virtual bool [eval_g](#) (Index n, const Number *x, bool new_x, Index m, Number *g)
- overload this method to return the vector of constraint values*
- virtual bool [eval_jac_g](#) (Index n, const Number *x, bool new_x, Index m, Index nele_jac, Index *iRow, Index *jCol, Number *values)
- overload this method to return the jacobian of the constraints.*
- virtual bool [eval_h](#) (Index n, const Number *x, bool new_x, Number obj_factor, Index m, const Number *lambda, bool new_lambda, Index nele_hess, Index *iRow, Index *jCol, Number *values)
- overload this method to return the hessian of the lagrangian.*
- virtual void [finalize_solution](#) (SolverReturn status, Index n, const Number *x, const Number *z_L, const Number *z_U, Index m, const Number *g, const Number *lambda, Number obj_value, const [IpoptData](#) *ip_data, [IpoptCalculatedQuantities](#) *ip_cq)
- This method is called when the algorithm is complete so the [TNLP](#) can store/write the solution.*
- virtual bool [intermediate_callback](#) (AlgorithmMode mode, Index iter, Number obj_value, Number inf_pr, Number inf_du, Number mu, Number d_norm, Number regularization_size, Number alpha_du, Number alpha_pr, Index ls_trials, const [IpoptData](#) *ip_data, [IpoptCalculatedQuantities](#) *ip_cq)
- Intermediate Callback method for the user.*
- virtual Index [get_number_of_nonlinear_variables](#) ()
- virtual bool [get_list_of_nonlinear_variables](#) (Index num_nonlin_vars, Index *pos_nonlin_vars)

Additional Inherited Members

3.178.1 Detailed Description

This is a wrapper around a given [TNLP](#) class that takes out a list of constraints that are given to the constructor.

It is provided for convenience, if one wants to experiment with problems that consist of only a subset of the constraints. But keep in mind that this is not efficient, since behind the scenes we are still evaluation all functions and derivatives, and are making copies of the original data.

Definition at line 23 of file IpTNLPReducer.hpp.

3.178.2 Constructor & Destructor Documentation

3.178.2.1 [Ipopt::TNLPReducer::TNLPReducer](#) ([TNLP](#) & *tnlp*, Index *n_g_skip*, const Index * *index_g_skip*, Index *n_xL_skip*, const Index * *index_xL_skip*, Index *n_xU_skip*, const Index * *index_xU_skip*, Index *n_x_fix*, const Index * *index_f_fix*)

Constructor is given the indices of the constraints that should be taken out of the problem statement, as well as the original [TNLP](#).

3.178.3 Member Function Documentation

3.178.3.1 virtual bool [Ipopt::TNLPReducer::get_bounds_info](#) (Index *n*, Number * *x_l*, Number * *x_u*, Index *m*, Number * *g_l*, Number * *g_u*) [virtual]

overload this method to return the information about the bound on the variables and constraints.

The value that indicates that a bound does not exist is specified in the parameters `nlp_lower_bound_inf` and `nlp_upper_bound_inf`. By default, `nlp_lower_bound_inf` is -1e19 and `nlp_upper_bound_inf` is 1e19. (see [TNLPAdapter](#))

Implements [Ipopt::TNLP](#).

3.178.3.2 `virtual bool Ipopt::TNLPReducer::get_scaling_parameters ( Number & obj_scaling, bool & use_x_scaling, Index n, Number * x_scaling, bool & use_g_scaling, Index m, Number * g_scaling ) [virtual]`

overload this method to return scaling parameters.

This is only called if the options are set to retrieve user scaling. There, `use_x_scaling` (or `use_g_scaling`) should get set to true only if the variables (or constraints) are to be scaled. This method should return true only if the scaling parameters could be provided.

Reimplemented from [Ipopt::TNLP](#).

3.178.3.3 `virtual bool Ipopt::TNLPReducer::get_variables_linearity ( Index n, LinearityType * var_types ) [virtual]`

overload this method to return the variables linearity ([TNLP::LINEAR](#) or [TNLP::NON_LINEAR](#)).

The `var_types` array has been allocated with length at least `n`. (default implementation just return false and does not fill the array).

Reimplemented from [Ipopt::TNLP](#).

3.178.3.4 `virtual bool Ipopt::TNLPReducer::get_constraints_linearity ( Index m, LinearityType * const_types ) [virtual]`

overload this method to return the constraint linearity.

array has been allocated with length at least `n`. (default implementation just return false and does not fill the array).

Reimplemented from [Ipopt::TNLP](#).

3.178.3.5 `virtual bool Ipopt::TNLPReducer::get_starting_point ( Index n, bool init_x, Number * x, bool init_z, Number * z_L, Number * z_U, Index m, bool init_lambda, Number * lambda ) [virtual]`

overload this method to return the starting point.

The bool variables indicate whether the algorithm wants you to initialize `x`, `z_L/z_u`, and `lambda`, respectively. If, for some reason, the algorithm wants you to initialize these and you cannot, return false, which will cause Ipopt to stop. You will have to run Ipopt with different options then.

Implements [Ipopt::TNLP](#).

3.178.3.6 `virtual bool Ipopt::TNLPReducer::get_warm_start_iterate ( IteratesVector & warm_start_iterate ) [virtual]`

overload this method to provide an Ipopt iterate (already in the form Ipopt requires it internally) for a warm start.

Since this is only for expert users, a default dummy implementation is provided and returns false.

Reimplemented from [Ipopt::TNLP](#).

3.178.3.7 `virtual bool Ipopt::TNLPReducer::eval_grad_f ( Index n, const Number * x, bool new_x, Number * grad_f ) [virtual]`

overload this method to return the vector of the gradient of the objective w.r.t.

`x`

Implements [Ipopt::TNLP](#).

3.178.3.8 `virtual bool Ipopt::TNLPReducer::eval_jac_g ( Index n, const Number * x, bool new_x, Index m, Index nele_jac, Index * iRow, Index * jCol, Number * values ) [virtual]`

overload this method to return the jacobian of the constraints.

The vectors `iRow` and `jCol` only need to be set once. The first call is used to set the structure only (`iRow` and `jCol` will be non-NULL, and values will be NULL) For subsequent calls, `iRow` and `jCol` will be NULL.

Implements [Ipopt::TNLP](#).

3.178.3.9 `virtual bool Ipopt::TNLPReducer::eval_h ( Index n, const Number * x, bool new_x, Number obj_factor, Index m, const Number * lambda, bool new_lambda, Index nele_hess, Index * iRow, Index * jCol, Number * values ) [virtual]`

overload this method to return the hessian of the lagrangian.

The vectors *iRow* and *jCol* only need to be set once (during the first call). The first call is used to set the structure only (*iRow* and *jCol* will be non-NULL, and *values* will be NULL) For subsequent calls, *iRow* and *jCol* will be NULL. This matrix is symmetric - specify the lower diagonal only. A default implementation is provided, in case the user wants to use quasi-Newton approximations to estimate the second derivatives and doesn't need to implement this method.

Reimplemented from [Ipopt::TNLP](#).

3.178.3.10 `virtual bool Ipopt::TNLPReducer::intermediate_callback (AlgorithmMode mode, Index iter, Number obj_value, Number inf_pr, Number inf_du, Number mu, Number d_norm, Number regularization_size, Number alpha_du, Number alpha_pr, Index ls_trials, const IpoptData * ip_data, IpoptCalculatedQuantities * ip_cq) [virtual]`

Intermediate Callback method for the user.

Providing dummy default implementation. For details see `IntermediateCallBack` in [IpNLP.hpp](#).

Reimplemented from [Ipopt::TNLP](#).

The documentation for this class was generated from the following file:


- `IpTNLPReducer.hpp`

3.179 Ipopt::TransposeMatrix Class Reference

Class for Matrices which are the transpose of another matrix.

```
#include <IpTransposeMatrix.hpp>
```

Inheritance diagram for Ipopt::TransposeMatrix:

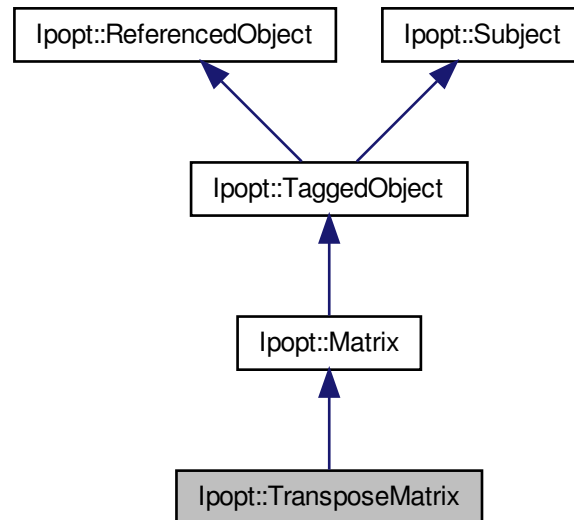

Public Member Functions

Constructors / Destructors

- [TransposeMatrix](#) (const [TransposeMatrixSpace](#) *owner_space)
Constructor, initializing with dimensions of the matrix.
- [~TransposeMatrix](#) ()
Destructor.
- [SmartPtr](#)< const [Matrix](#) > [OrigMatrix](#) () const

Protected Member Functions

Methods overloaded from matrix

- virtual void [MultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix-vector multiply.
- virtual void [TransMultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix(transpose) vector multiply.
- virtual bool [IsValidNumbersImpl](#) () const
Method for determining if all stored numbers are valid (i.e., no Inf or Nan).
- virtual void [ComputeRowAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const
Compute the max-norm of the rows in the matrix.
- virtual void [ComputeColAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const
Compute the max-norm of the columns in the matrix.
- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
Print detailed information about the matrix.

Additional Inherited Members

3.179.1 Detailed Description

Class for Matrices which are the transpose of another matrix.

Definition at line 23 of file IpTransposeMatrix.hpp.

3.179.2 Member Function Documentation

3.179.2.1 `virtual void Ipopt::TransposeMatrix::MultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const [inline], [protected], [virtual]`

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implements [Ipopt::Matrix](#).

Definition at line 47 of file IpTransposeMatrix.hpp.

3.179.2.2 `virtual void Ipopt::TransposeMatrix::TransMultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const [inline], [protected], [virtual]`

Matrix(transpose) vector multiply.

Computes $y = \alpha * \text{Matrix}^T * x + \beta * y$

Implements [Ipopt::Matrix](#).

Definition at line 54 of file IpTransposeMatrix.hpp.

3.179.2.3 `virtual bool Ipopt::TransposeMatrix::IsValidNumbersImpl ( ) const [inline], [protected], [virtual]`

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Reimplemented from [Ipopt::Matrix](#).

Definition at line 63 of file IpTransposeMatrix.hpp.

3.179.2.4 `virtual void Ipopt::TransposeMatrix::ComputeRowAMaxImpl ( Vector & rows_norms, bool init ) const [inline], [protected], [virtual]`

Compute the max-norm of the rows in the matrix.

The result is stored in `rows_norms`. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

Definition at line 69 of file IpTransposeMatrix.hpp.

3.179.2.5 `virtual void Ipopt::TransposeMatrix::ComputeColAMaxImpl ( Vector & cols_norms, bool init ) const [inline], [protected], [virtual]`

Compute the max-norm of the columns in the matrix.

The result is stored in `cols_norms`. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

Definition at line 75 of file IpTransposeMatrix.hpp.

3.179.2.6 virtual void Ipopt::TransposeMatrix::PrintImpl (const Journalist & *jnlst*, EJournalLevel *level*, EJournalCategory *category*, const std::string & *name*, Index *indent*, const std::string & *prefix*) const [protected], [virtual]

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

The documentation for this class was generated from the following file:


- IpTransposeMatrix.hpp

3.180 Ipopt::TransposeMatrixSpace Class Reference

This is the matrix space for [TransposeMatrix](#).

```
#include <IpTransposeMatrix.hpp>
```

Inheritance diagram for Ipopt::TransposeMatrixSpace:

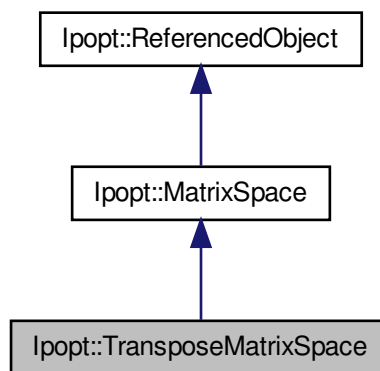

Public Member Functions

- virtual [Matrix](#) * [MakeNew](#) () const
Overloaded MakeNew method for the [MatrixSpace](#) base class.
- [TransposeMatrix](#) * [MakeNewTransposeMatrix](#) () const
Method for creating a new matrix of this specific type.

Constructors / Destructors

- [TransposeMatrixSpace](#) (const [MatrixSpace](#) *orig_matrix_space)
Constructor, given the dimension of the matrix.
- virtual [~TransposeMatrixSpace](#) ()
Destructor.

3.180.1 Detailed Description

This is the matrix space for [TransposeMatrix](#).

Definition at line 113 of file IpTransposeMatrix.hpp.

3.180.2 Constructor & Destructor Documentation

3.180.2.1 Ipopt::TransposeMatrixSpace::TransposeMatrixSpace (const MatrixSpace * orig_matrix_space) [inline]

Constructor, given the dimension of the matrix.

Definition at line 119 of file IpTransposeMatrix.hpp.

3.180.3 Member Function Documentation

3.180.3.1 TransposeMatrix* Ipopt::TransposeMatrixSpace::MakeNewTransposeMatrix () const [inline]

Method for creating a new matrix of this specific type.

Definition at line 138 of file IpTransposeMatrix.hpp.

The documentation for this class was generated from the following file:

- IpTransposeMatrix.hpp

3.181 Ipopt::TripletHelper Class Reference

Static Public Member Functions

A set of recursive routines that help with the Triplet format.

- static Index [GetNumberEntries](#) (const [Matrix](#) &matrix)
find the total number of triplet entries of a [Matrix](#)
- static void [FillRowCol](#) (Index n_entries, const [Matrix](#) &matrix, Index *iRow, Index *jCol, Index row_offset=0, Index col_offset=0)
fill the irows, jcols structure for the triplet format from the matrix
- static void [FillValues](#) (Index n_entries, const [Matrix](#) &matrix, Number *values)
fill the values for the triplet format from the matrix
- static void [FillValuesFromVector](#) (Index dim, const [Vector](#) &vector, Number *values)
fill the values from the vector into a dense double structure*
- static void [PutValuesInVector](#) (Index dim, const double *values, [Vector](#) &vector)
put the values from the double back into the vector*

3.181.1 Detailed Description

Definition at line 40 of file IpTripletHelper.hpp.

The documentation for this class was generated from the following file:


- IpTripletHelper.hpp

3.182 Ipopt::TripletToCSRConverter Class Reference

Class for converting symmetric matrices given in triplet format to matrices in compressed sparse row (CSR) format of the upper triangular part (or, equivalently, compressed sparse column (CSC) format for the lower triangular part).

```
#include <IpTripletToCSRConverter.hpp>
```

Inheritance diagram for Ipopt::TripletToCSRConverter:

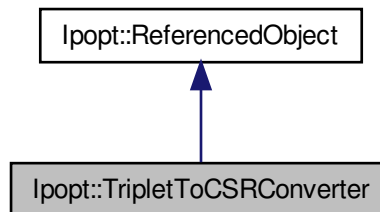

Classes

- class **TripletEntry**
Class for one triplet position entry.

Public Types

- enum **ETriFull** { **Triangular_Format**, **Full_Format** }
Enum to specify half or full matrix storage.

Public Member Functions

- Index **InitializeConverter** (Index dim, Index nonzeros, const Index *airn, const Index *ajcn)
Initialize the converter, given the fixed structure of the matrix.
- void **ConvertValues** (Index nonzeros_triplet, const Number *a_triplet, Index nonzeros_compressed, Number *a_compressed)
Convert the values of the nonzero elements.

Constructor/Destructor

- **TripletToCSRConverter** (Index offset, **ETriFull** hf=**Triangular_Format**)
- virtual **~TripletToCSRConverter** ()
Destructor.

Accessor methods

- const Index * **IA** () const
Return the IA array for the condensed format.

- const Index * **JA** () const
Return the JA array for the condensed format.
- const Index * **iPosFirst** () const

3.182.1 Detailed Description

Class for converting symmetric matrices given in triplet format to matrices in compressed sparse row (CSR) format of the upper triangular part (or, equivalently, compressed sparse column (CSC) format for the lower triangular part).

In the description for this class, we assume that we discuss the CSR format.

Definition at line 23 of file IpTripletToCSRConverter.hpp.

3.182.2 Member Enumeration Documentation

3.182.2.1 enum Ipopt::TripletToCSRConverter::ETriFull

Enum to specify half or full matrix storage.

Enumerator:

Triangular_Format Lower (or Upper) triangular stored only.

Full_Format Store both lower and upper parts.

Definition at line 82 of file IpTripletToCSRConverter.hpp.

3.182.3 Member Function Documentation

3.182.3.1 Index Ipopt::TripletToCSRConverter::InitializeConverter (Index *dim*, Index *nonzeros*, const Index * *airn*, const Index * *ajcn*)

Initialize the converter, given the fixed structure of the matrix.

There, ndim gives the number of rows and columns of the matrix, nonzeros give the number of nonzero elements, and airn and ajcn give the positions of the nonzero elements. The return value is the number of nonzeros in the condensed matrix. (Since nonzero elements can be listed several times in the triplet format, it is possible that this value is different from the input value nonzeros.) This method must be called before the GetIA, GetJA, Convert Values methods are called.

3.182.3.2 const Index* Ipopt::TripletToCSRConverter::IA () const [inline]

Return the IA array for the condensed format.

Definition at line 118 of file IpTripletToCSRConverter.hpp.

3.182.3.3 const Index* Ipopt::TripletToCSRConverter::JA () const [inline]

Return the JA array for the condensed format.

Definition at line 125 of file IpTripletToCSRConverter.hpp.

3.182.3.4 void Ipopt::TripletToCSRConverter::ConvertValues (Index *nonzeros_triplet*, const Number * *a_triplet*, Index *nonzeros_compressed*, Number * *a_compressed*)

Convert the values of the nonzero elements.

Given the values `a_triplet` for the triplet format, return the array of values for the condensed format in `a_condensed`. `nonzeros_condensed` is the length of the array `a_condensed` and must be identical to the return value of `InitializeConverter`.

The documentation for this class was generated from the following file:


- `IpTripletToCSRConverter.hpp`

3.183 Ipopt::TSymDependencyDetector Class Reference

Base class for all derived algorithms for detecting linearly dependent rows in the constraint Jacobian.

```
#include <IpTSymDependencyDetector.hpp>
```

Inheritance diagram for `Ipopt::TSymDependencyDetector`:

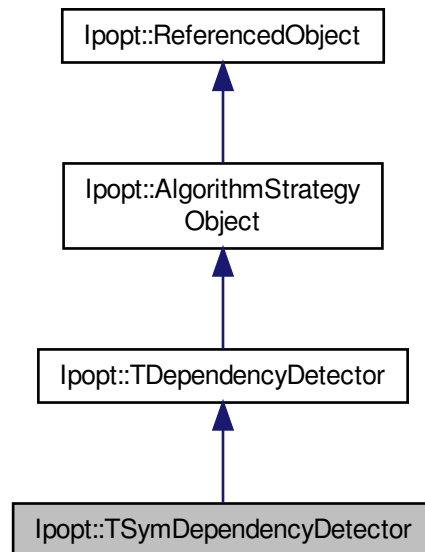

Public Member Functions

- virtual bool `InitializeImpl` (const [OptionsList](#) &options, const std::string &prefix)
Has to be called to initialize and reset these objects.
- virtual bool `DetermineDependentRows` (Index n_rows, Index n_cols, Index n_jac_nz, Number *jac_c_vals, Index *jac_c_iRow, Index *jac_c_jCol, std::list< Index > &c_deps)
Method determining the number of linearly dependent rows in the matrix and the indices of those rows.

Constructor/Destructor

- `TSymDependencyDetector` ([TSymLinearSolver](#) &tsym_linear_solver)
- virtual `~TSymDependencyDetector` ()

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
This must be called to make the options for this class known.

Additional Inherited Members

3.183.1 Detailed Description

Base class for all derived algorithms for detecting linearly dependent rows in the constraint Jacobian.

Definition at line 20 of file IpTSymDependencyDetector.hpp.

3.183.2 Member Function Documentation

3.183.2.1 virtual bool Ipopt::TSymDependencyDetector::InitializeImpl (const [OptionsList](#) & options, const std::string & prefix)
[virtual]

Has to be called to initialize and reset these objects.

Implements [Ipopt::TDependencyDetector](#).

3.183.2.2 virtual bool Ipopt::TSymDependencyDetector::DetermineDependentRows (Index n_rows, Index n_cols, Index n_jac_nz, Number * jac_c_vals, Index * jac_c_iRow, Index * jac_c_jCol, std::list< Index > & c_deps) [virtual]

Method determining the number of linearly dependent rows in the matrix and the indices of those rows.

We assume that the matrix is available in "Triplet" format (MA28 format), and that the arrays given to this method can be modified internally, i.e., they are not used by the calling program anymore after this call. This method returns false if there was a problem with the underlying linear solver.

Implements [Ipopt::TDependencyDetector](#).

The documentation for this class was generated from the following file:


- IpTSymDependencyDetector.hpp

3.184 Ipopt::TSymLinearSolver Class Reference

General driver for linear solvers for sparse indefinite symmetric matrices.

```
#include <IpTSymLinearSolver.hpp>
```

Inheritance diagram for Ipopt::TSymLinearSolver:

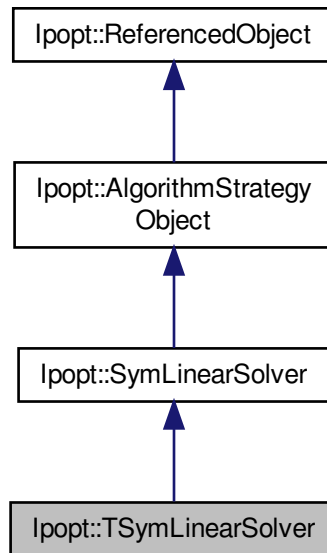

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)

Constructor/Destructor

- [TSymLinearSolver](#) ([SmartPtr](#)< [SparseSymLinearSolverInterface](#) > solver_interface, [SmartPtr](#)< [TSymScalingMethod](#) > scaling_method)
Constructor.
- virtual [~TSymLinearSolver](#) ()
Destructor.

Methods for requesting solution of the linear system.

- virtual [ESymSolverStatus](#) [MultiSolve](#) (const [SymMatrix](#) &A, std::vector< [SmartPtr](#)< const [Vector](#) > > &rhsV, std::vector< [SmartPtr](#)< [Vector](#) > > &solV, bool check_NegEVals, Index numberOfNegEVals)
Solve operation for multiple right hand sides.
- virtual Index [NumberOfNegEVals](#) () const
Number of negative eigenvalues detected during last factorization.
- virtual bool [IncreaseQuality](#) ()
Request to increase quality of solution for next solve.
- virtual bool [ProvidesInertia](#) () const

Query whether inertia is computed by linear solver.

Methods related to the detection of linearly dependent

rows in a matrix

- bool [ProvidesDegeneracyDetection](#) () const
Returns true if the underlying linear solver can detect the linearly dependent rows in a matrix.
- ESymSolverStatus [DetermineDependentRows](#) (Index n_rows, Index n_cols, Index n_jac_nz, Number *jac_c_vals, Index *jac_c_iRow, Index *jac_c_jCol, std::list< Index > &c_deps)
Given the entries of a matrix in Triplet format, this method determines the list of row indices of the linearly dependent rows.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)
Methods for [OptionsList](#).

Additional Inherited Members

3.184.1 Detailed Description

General driver for linear solvers for sparse indefinite symmetric matrices.

This interface includes a call to a method for scaling of the matrix (if given). This class takes in the constructor a pointer to the interface to an actual linear solver, and possibly a pointer to a method for computing scaling factors. It translates the [SymMatrix](#) into the format required by the linear solver and calls the solver via the [TSymLinearSolverInterface](#). If a scaling method has been given, the matrix, the right hand side, and the solution are scaled.

Definition at line 33 of file [IpTSymLinearSolver.hpp](#).

3.184.2 Constructor & Destructor Documentation

3.184.2.1 [Ipopt::TSymLinearSolver::TSymLinearSolver](#) (SmartPtr< [SparseSymLinearSolverInterface](#) > solver_interface, SmartPtr< [TSymScalingMethod](#) > scaling_method)

Constructor.

The solver_interface is a pointer to a linear solver for symmetric matrices in triplet format. If scaling_method not NULL, it must be a pointer to a class for computing scaling factors for the matrix.

3.184.3 Member Function Documentation

3.184.3.1 virtual ESymSolverStatus [Ipopt::TSymLinearSolver::MultiSolve](#) (const [SymMatrix](#) & A, std::vector< SmartPtr< const [Vector](#) > > & rhsV, std::vector< SmartPtr< [Vector](#) > > & solV, bool check_NegEvals, Index numberOfNegEvals)
[virtual]

Solve operation for multiple right hand sides.

For details see the description in the base class [SymLinearSolver](#).

Implements [Ipopt::SymLinearSolver](#).

3.184.3.2 virtual Index Ipopt::TSymLinearSolver::NumberOfNegEvals () const [virtual]

Number of negative eigenvalues detected during last factorization.

Returns the number of negative eigenvalues of the most recent factorized matrix.

Implements [Ipopt::SymLinearSolver](#).

3.184.3.3 virtual bool Ipopt::TSymLinearSolver::IncreaseQuality () [virtual]

Request to increase quality of solution for next solve.

Ask linear solver to increase quality of solution for the next solve (e.g. increase pivot tolerance). Returns false, if this is not possible (e.g. maximal pivot tolerance already used.)

Implements [Ipopt::SymLinearSolver](#).

3.184.3.4 virtual bool Ipopt::TSymLinearSolver::ProvidesInertia () const [virtual]

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implements [Ipopt::SymLinearSolver](#).

3.184.3.5 ESymSolverStatus Ipopt::TSymLinearSolver::DetermineDependentRows (Index *n_rows*, Index *n_cols*, Index *n_jac_nz*, Number * *jac_c_vals*, Index * *jac_c_iRow*, Index * *jac_c_jCol*, std::list< Index > & *c_deps*)

Given the entries of a matrix in Triplet format, this method determines the list of row indices of the linearly dependent rows.

This is a specific implementation for Triplet matrices.

The documentation for this class was generated from the following file:


- IpTSymLinearSolver.hpp

3.185 Ipopt::TSymScalingMethod Class Reference

Base class for the method for computing scaling factors for symmetric matrices in triplet format.

```
#include <IpTSymScalingMethod.hpp>
```

Inheritance diagram for Ipopt::TSymScalingMethod:

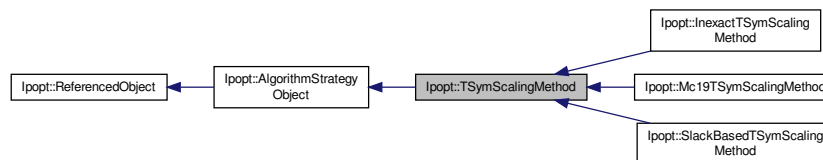

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)=0
overloaded from [AlgorithmStrategyObject](#)

- virtual bool [ComputeSymTScalingFactors](#) (Index *n*, Index *nnz*, const Index **airn*, const Index **ajcn*, const double **a*, double **scaling_factors*)=0

Method for computing the symmetric scaling factors, given the symmetric matrix in triplet (MA27) format.

Constructor/Destructor

- **TSymScalingMethod** ()
- **~TSymScalingMethod** ()

Additional Inherited Members

3.185.1 Detailed Description

Base class for the method for computing scaling factors for symmetric matrices in triplet format.

Definition at line 23 of file IpTSymScalingMethod.hpp.

3.185.2 Member Function Documentation

3.185.2.1 virtual bool Ipopt::TSymScalingMethod::ComputeSymTScalingFactors (Index *n*, Index *nnz*, const Index * *airn*, const Index * *ajcn*, const double * *a*, double * *scaling_factors*) [pure virtual]

Method for computing the symmetric scaling factors, given the symmetric matrix in triplet (MA27) format.

The documentation for this class was generated from the following file:


- IpTSymScalingMethod.hpp

3.186 Ipopt::UserScaling Class Reference

This class does problem scaling by getting scaling parameters from the user (through the [NLP](#) interface).

```
#include <IpUserScaling.hpp>
```

Inheritance diagram for Ipopt::UserScaling:

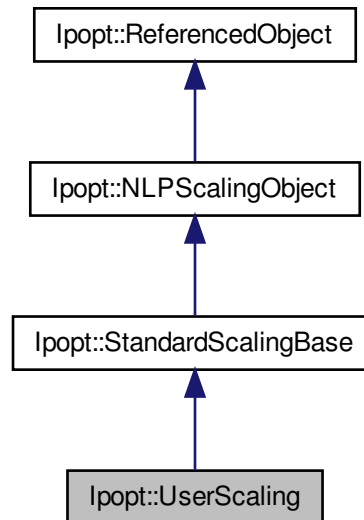

Public Member Functions

Constructors/Destructors

- **UserScaling** (const [SmartPtr](#)< const [NLP](#) > &nlp)
- virtual [~UserScaling](#) ()
Default destructor.

Protected Member Functions

- virtual void [DetermineScalingParametersImpl](#) (const [SmartPtr](#)< const [VectorSpace](#) > x_space, const [SmartPtr](#)< const [VectorSpace](#) > c_space, const [SmartPtr](#)< const [VectorSpace](#) > d_space, const [SmartPtr](#)< const [MatrixSpace](#) > jac_c_space, const [SmartPtr](#)< const [MatrixSpace](#) > jac_d_space, const [SmartPtr](#)< const [SymMatrixSpace](#) > h_space, const [Matrix](#) &Px_L, const [Vector](#) &x_L, const [Matrix](#) &Px_U, const [Vector](#) &x_U, Number &df, [SmartPtr](#)< [Vector](#) > &dx, [SmartPtr](#)< [Vector](#) > &dc, [SmartPtr](#)< [Vector](#) > &dd)

This is the method that has to be overloaded by a particular scaling method that somehow computes the scaling vectors dx, dc, and dd.

Additional Inherited Members

3.186.1 Detailed Description

This class does problem scaling by getting scaling parameters from the user (through the [NLP](#) interface).

Definition at line 20 of file IpUserScaling.hpp.

3.186.2 Member Function Documentation

3.186.2.1 `virtual void Ipopt::UserScaling::DetermineScalingParametersImpl (const SmartPtr< const VectorSpace > x_space, const SmartPtr< const VectorSpace > c_space, const SmartPtr< const VectorSpace > d_space, const SmartPtr< const MatrixSpace > jac_c_space, const SmartPtr< const MatrixSpace > jac_d_space, const SmartPtr< const SymMatrixSpace > h_space, const Matrix & Px_L, const Vector & x_L, const Matrix & Px_U, const Vector & x_U, Number & df, SmartPtr< Vector > & dx, SmartPtr< Vector > & dc, SmartPtr< Vector > & dd) [protected], [virtual]`

This is the method that has to be overloaded by a particular scaling method that somehow computes the scaling vectors dx, dc, and dd.

The pointers to those vectors can be NULL, in which case no scaling for that item will be done later.

Implements [Ipopt::StandardScalingBase](#).

The documentation for this class was generated from the following file:


- IpUserScaling.hpp

3.187 Ipopt::Vector Class Reference

[Vector](#) Base Class.

```
#include <IpVector.hpp>
```

Inheritance diagram for Ipopt::Vector:

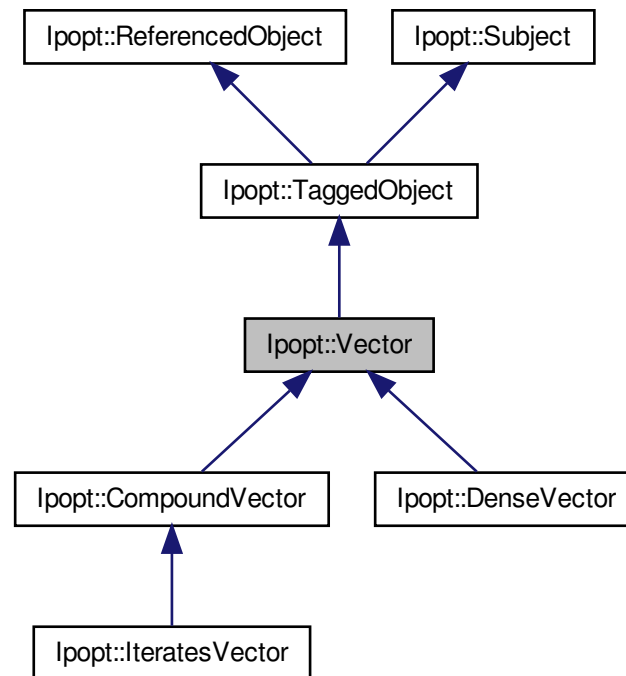

Public Member Functions

- `Vector * MakeNew () const`
Create new `Vector` of the same type with uninitialized data.
- `Vector * MakeNewCopy () const`
Create new `Vector` of the same type and copy the data over.
- `bool HasValidNumbers () const`
Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Constructor/Destructor

- `Vector (const VectorSpace *owner_space)`
Constructor.
- `virtual ~Vector ()`
Destructor.

Standard BLAS-1 Operations

(derived classes do NOT overload these methods, instead, overload the protected versions of these methods).

- `void Copy (const Vector &x)`

- Copy the data of the vector x into this vector (DCOPY).
- void [Scal](#) (Number alpha)
Scales the vector by scalar alpha (DSCAL)
- void [Axy](#) (Number alpha, const [Vector](#) &x)
Add the multiple alpha of vector x to this vector (DAXPY)
- Number [Dot](#) (const [Vector](#) &x) const
Computes inner product of vector x with this (DDOT)
- Number [Nrm2](#) () const
Computes the 2-norm of this vector (DNRM2)
- Number [Asum](#) () const
Computes the 1-norm of this vector (DASUM)
- Number [Amax](#) () const
Computes the max-norm of this vector (based on IDAMAX)

Additional (Non-BLAS) Vector Methods

(derived classes do NOT overload these methods, instead, overload the protected versions of these methods).

- void [Set](#) (Number alpha)
Set each element in the vector to the scalar alpha.
- void [ElementWiseDivide](#) (const [Vector](#) &x)
Element-wise division $y_i \leftarrow y_i / x_i$.
- void [ElementWiseMultiply](#) (const [Vector](#) &x)
Element-wise multiplication $y_i \leftarrow y_i * x_i$.
- void [ElementWiseMax](#) (const [Vector](#) &x)
Element-wise max against entries in x .
- void [ElementWiseMin](#) (const [Vector](#) &x)
Element-wise min against entries in x .
- void [ElementWiseReciprocal](#) ()
Reciprocates the entries in the vector.
- void [ElementWiseAbs](#) ()
Absolute values of the entries in the vector.
- void [ElementWiseSqrt](#) ()
Element-wise square root of the entries in the vector.
- void [ElementWiseSgn](#) ()
Replaces the vector values with their sgn values
(-1 if $x_i < 0$, 0 if $x_i == 0$, and 1 if $x_i > 0$)
- void [AddScalar](#) (Number scalar)
Add scalar to every vector component.
- Number [Max](#) () const
Returns the maximum value in the vector.
- Number [Min](#) () const
Returns the minimum value in the vector.
- Number [Sum](#) () const
Returns the sum of the vector entries.
- Number [SumLogs](#) () const
Returns the sum of the logs of each vector entry.

Methods for specialized operations. A prototype

implementation is provided, but for efficient implementation those should be specially implemented.

- void [AddOneVector](#) (Number a, const [Vector](#) &v1, Number c)
Add one vector, $y = a * v1 + c * y$.

- void **AddTwoVectors** (Number a, const **Vector** &v1, Number b, const **Vector** &v2, Number c)
*Add two vectors, $y = a * v1 + b * v2 + c * y$.*
- Number **FracToBound** (const **Vector** &delta, Number tau) const
Fraction to the boundary parameter.
- void **AddVectorQuotient** (Number a, const **Vector** &z, const **Vector** &s, Number c)
*Add the quotient of two vectors, $y = a * z/s + c * y$.*

Accessor methods

- Index **Dim** () const
*Dimension of the **Vector**.*
- **SmartPtr**< const **VectorSpace** > **OwnerSpace** () const
*Return the owner **VectorSpace**.*

Output methods

(derived classes do NOT overload these methods, instead, overload the protected versions of these methods).

- void **Print** (**SmartPtr**< const **Journalist** > jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent=0, const std::string &prefix="") const
Print the entire vector.
- void **Print** (const **Journalist** &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent=0, const std::string &prefix="") const

Protected Member Functions

implementation methods (derived classes MUST

overload these pure virtual protected methods.)

- virtual void **CopyImpl** (const **Vector** &x)=0
Copy the data of the vector x into this vector (DCOPY).
- virtual void **ScallImpl** (Number alpha)=0
Scales the vector by scalar alpha (DSCAL)
- virtual void **AxpyImpl** (Number alpha, const **Vector** &x)=0
Add the multiple alpha of vector x to this vector (DAXPY)
- virtual Number **DotImpl** (const **Vector** &x) const =0
Computes inner product of vector x with this (DDOT)
- virtual Number **Nrm2Impl** () const =0
Computes the 2-norm of this vector (DNRM2)
- virtual Number **AsumImpl** () const =0
Computes the 1-norm of this vector (DASUM)
- virtual Number **AmaxImpl** () const =0
Computes the max-norm of this vector (based on IDAMAX)
- virtual void **SetImpl** (Number alpha)=0
Set each element in the vector to the scalar alpha.
- virtual void **ElementWiseDivideImpl** (const **Vector** &x)=0
Element-wise division $y_i \leftarrow y_i / x_i$.
- virtual void **ElementWiseMultiplyImpl** (const **Vector** &x)=0
*Element-wise multiplication $y_i \leftarrow y_i * x_i$.*
- virtual void **ElementWiseMaxImpl** (const **Vector** &x)=0
Element-wise max against entries in x.
- virtual void **ElementWiseMinImpl** (const **Vector** &x)=0
Element-wise min against entries in x.

- virtual void [ElementWiseReciprocalImpl](#) ()=0
Reciprocates the elements of the vector.
- virtual void [ElementWiseAbsImpl](#) ()=0
Take elementwise absolute values of the elements of the vector.
- virtual void [ElementWiseSqrtImpl](#) ()=0
Take elementwise square-root of the elements of the vector.
- virtual void [ElementWiseSgnImpl](#) ()=0
Replaces entries with sgn of the entry.
- virtual void [AddScalarImpl](#) (Number scalar)=0
Add scalar to every component of vector.
- virtual Number [MaxImpl](#) () const =0
Max value in the vector.
- virtual Number [MinImpl](#) () const =0
Min number in the vector.
- virtual Number [SumImpl](#) () const =0
Sum of entries in the vector.
- virtual Number [SumLogsImpl](#) () const =0
Sum of logs of entries in the vector.
- virtual void [AddTwoVectorsImpl](#) (Number a, const [Vector](#) &v1, Number b, const [Vector](#) &v2, Number c)
*Add two vectors ($a * v1 + b * v2$).*
- virtual Number [FracToBoundImpl](#) (const [Vector](#) &delta, Number tau) const
Fraction to boundary parameter.
- virtual void [AddVectorQuotientImpl](#) (Number a, const [Vector](#) &z, const [Vector](#) &s, Number c)
Add the quotient of two vectors.
- virtual bool [IsValidNumbersImpl](#) () const
Method for determining if all stored numbers are valid (i.e., no Inf or Nan).
- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const =0
Print the entire vector.

Additional Inherited Members

3.187.1 Detailed Description

[Vector](#) Base Class.

This is the base class for all derived vector types. Those vectors are meant to store entities like iterates, Lagrangian multipliers, constraint values etc. The implementation of a vector type depends on the computational environment (e.g. just a double array on a shared memory machine, or distributed double arrays for a distributed memory machine.)

Deriving from [Vector](#): This class inherits from tagged object to implement an advanced caching scheme. Because of this, the [TaggedObject](#) method [ObjectChanged\(\)](#) must be called each time the [Vector](#) changes. If you overload the `XX_XX_Impl` protected methods, this taken care of (along with caching if possible) for you. If you have additional methods in your derived class that change the underlying data (vector values), you MUST remember to call [ObjectChanged\(\)](#) AFTER making the change!

Definition at line 47 of file `IpVector.hpp`.

3.187.2 Constructor & Destructor Documentation

3.187.2.1 `Ipopt::Vector::Vector ( const VectorSpace * owner_space ) [inline]`

Constructor.

It has to be given a pointer to the corresponding [VectorSpace](#).

Definition at line 445 of file `IpVector.hpp`.

3.187.3 Member Function Documentation

3.187.3.1 void Ipopt::Vector::Copy (const Vector & x) [inline]

Copy the data of the vector x into this vector (DCOPY).

Definition at line 478 of file IpVector.hpp.

3.187.3.2 void Ipopt::Vector::Set (Number *alpha*) [inline]

Set each element in the vector to the scalar alpha.

Definition at line 599 of file IpVector.hpp.

3.187.3.3 void Ipopt::Vector::AddOneVector (Number a, const Vector & v1, Number c) [inline]

Add one vector, $y = a * v1 + c * y$.

This is automatically reduced to call AddTwoVectors.

Definition at line 687 of file IpVector.hpp.

3.187.3.4 void Ipopt::Vector::AddTwoVectors (Number a, const Vector & v1, Number b, const Vector & v2, Number c) [inline]

Add two vectors, $y = a * v1 + b * v2 + c * y$.

Here, this vector is y

Definition at line 693 of file IpVector.hpp.

3.187.3.5 Number Ipopt::Vector::FracToBound (const Vector & delta, Number tau) const [inline]

Fraction to the boundary parameter.

Computes $\alpha = \max\{\bar{\alpha} \in (0, 1] : x + \bar{\alpha}\Delta \geq (1 - \tau)x\}$

Definition at line 701 of file IpVector.hpp.

3.187.3.6 void Ipopt::Vector::AddVectorQuotient (Number a, const Vector & z, const Vector & s, Number c) [inline]

Add the quotient of two vectors, $y = a * z/s + c * y$.

Definition at line 721 of file IpVector.hpp.

3.187.3.7 bool Ipopt::Vector::IsValidNumbers () const [inline]

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

Definition at line 729 of file IpVector.hpp.

3.187.3.8 virtual void Ipopt::Vector::CopyImpl (const Vector & x) [protected], [pure virtual]

Copy the data of the vector x into this vector (DCOPY).

Implemented in [Ipopt::DenseVector](#), and [Ipopt::CompoundVector](#).

3.187.3.9 virtual void Ipopt::Vector::SetImpl (Number *alpha*) [protected], [pure virtual]

Set each element in the vector to the scalar alpha.

Implemented in [Ipopt::DenseVector](#), and [Ipopt::CompoundVector](#).

3.187.3.10 `virtual void Ipopt::Vector::AddTwoVectorsImpl ( Number a, const Vector & v1, Number b, const Vector & v2, Number c )` [protected],[virtual]

Add two vectors ($a * v1 + b * v2$).

Result is stored in this vector.

Reimplemented in [Ipopt::DenseVector](#), and [Ipopt::CompoundVector](#).

3.187.3.11 `virtual Number Ipopt::Vector::FracToBoundImpl ( const Vector & delta, Number tau ) const` [protected],[virtual]

Fraction to boundary parameter.

Reimplemented in [Ipopt::DenseVector](#), and [Ipopt::CompoundVector](#).

3.187.3.12 `virtual bool Ipopt::Vector::IsValidNumbersImpl ( ) const` [protected],[virtual]

Method for determining if all stored numbers are valid (i.e., no Inf or Nan).

A default implementation using Asum is provided.

Reimplemented in [Ipopt::CompoundVector](#).

The documentation for this class was generated from the following file:


- [IpVector.hpp](#)

3.188 Ipopt::VectorSpace Class Reference

[VectorSpace](#) base class, corresponding to the [Vector](#) base class.

```
#include <IpVector.hpp>
```

Inheritance diagram for Ipopt::VectorSpace:

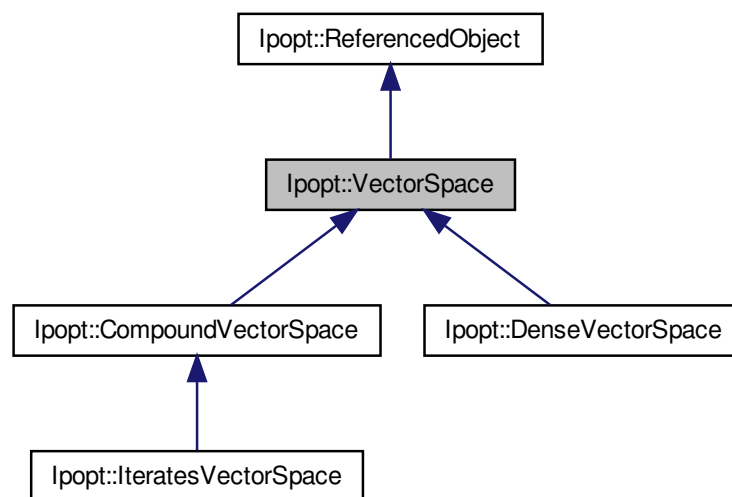

Public Member Functions

- virtual [Vector](#) * [MakeNew](#) () const =0
Pure virtual method for creating a new [Vector](#) of the corresponding type.
- Index [Dim](#) () const
Accessor function for the dimension of the vectors of this type.

Constructors/Destructors

- [VectorSpace](#) (Index dim)
Constructor, given the dimension of all vectors generated by this [VectorSpace](#).
- virtual [~VectorSpace](#) ()
Destructor.

3.188.1 Detailed Description

[VectorSpace](#) base class, corresponding to the [Vector](#) base class.

For each [Vector](#) implementation, a corresponding [VectorSpace](#) has to be implemented. A [VectorSpace](#) is able to create new Vectors of a specific type. The [VectorSpace](#) should also store information that is common to all Vectors of that type. For example, the dimension of a [Vector](#) is stored in the [VectorSpace](#) base class.

Definition at line 390 of file IpVector.hpp.

3.188.2 Member Function Documentation**3.188.2.1 Index Ipopt::VectorSpace::Dim () const [inline]**

Accessor function for the dimension of the vectors of this type.

Definition at line 411 of file IpVector.hpp.

The documentation for this class was generated from the following file:


- IpVector.hpp

3.189 Ipopt::WarmStartIterateInitializer Class Reference

Class implementing an initialization procedure for warm starts.

```
#include <IpWarmStartIterateInitializer.hpp>
```

Inheritance diagram for Ipopt::WarmStartIterateInitializer:

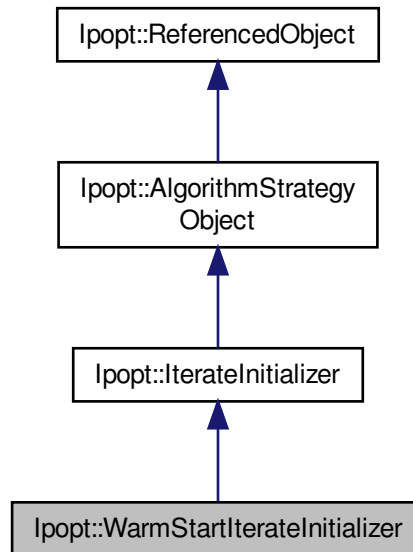

Public Member Functions

- virtual bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [SetInitialIterates](#) ()
Compute the initial iterates and set the into the curr field of the ip_data object.

Constructors/Destructors

- [WarmStartIterateInitializer](#) ()
Constructor.
- virtual [~WarmStartIterateInitializer](#) ()
Default destructor.

Static Public Member Functions

- static void [RegisterOptions](#) ([SmartPtr](#)< [RegisteredOptions](#) > roptions)
Methods used by IpoptType.

Additional Inherited Members

3.189.1 Detailed Description

Class implementing an initialization procedure for warm starts.

Definition at line 20 of file IpWarmStartIterateInitializer.hpp.

3.189.2 Constructor & Destructor Documentation

3.189.2.1 Ipopt::WarmStartIterateInitializer::WarmStartIterateInitializer ()

Constructor.

3.189.3 Member Function Documentation

3.189.3.1 virtual bool Ipopt::WarmStartIterateInitializer::SetInitialIterates () [virtual]

Compute the initial iterates and set the into the curr field of the ip_data object.

Implements [Ipopt::IterateInitializer](#).

The documentation for this class was generated from the following file:


- IpWarmStartIterateInitializer.hpp

3.190 Ipopt::WsmSolverInterface Class Reference

Interface to the linear solver Wsm, derived from [SparseSymLinearSolverInterface](#).

```
#include <IpWsmSolverInterface.hpp>
```

Inheritance diagram for Ipopt::WsmSolverInterface:

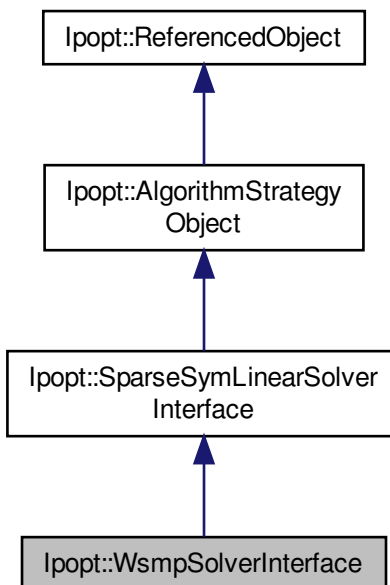

Public Member Functions

- bool [InitializeImpl](#) (const [OptionsList](#) &options, const std::string &prefix)
overloaded from [AlgorithmStrategyObject](#)
- virtual bool [ProvidesDegeneracyDetection](#) () const
Query whether the indices of linearly dependent rows/columns can be determined by this linear solver.
- virtual ESymSolverStatus [DetermineDependentRows](#) (const Index *ia, const Index *ja, std::list< Index > &c_deps)
This method determines the list of row indices of the linearly dependent rows.

Constructor/Destructor

- [WsmSolverInterface](#) ()
Constructor.
- virtual [~WsmSolverInterface](#) ()
Destructor.

Methods for requesting solution of the linear system.

- virtual ESymSolverStatus [InitializeStructure](#) (Index dim, Index nonzeros, const Index *ia, const Index *ja)
Method for initializing internal structures.
- virtual double * [GetValuesArrayPtr](#) ()
Method returning an internal array into which the nonzero elements are to be stored.
- virtual ESymSolverStatus [MultiSolve](#) (bool new_matrix, const Index *ia, const Index *ja, Index nrhs, double *rhs_vals, bool check_NegEVals, Index numberOfNegEVals)
Solve operation for multiple right hand sides.
- virtual Index [NumberOfNegEVals](#) () const
Number of negative eigenvalues detected during last factorization.
- virtual bool [IncreaseQuality](#) ()
Request to increase quality of solution for next solve.
- virtual bool [ProvidesInertia](#) () const
Query whether inertia is computed by linear solver.
- [EMatrixFormat](#) [MatrixFormat](#) () const
Query of requested matrix type that the linear solver understands.

Static Public Member Functions

- static void [RegisterOptions](#) (SmartPtr< [RegisteredOptions](#) > roptions)
Methods for IpoptType.

Additional Inherited Members

3.190.1 Detailed Description

Interface to the linear solver Wsm, derived from [SparseSymLinearSolverInterface](#).

For details, see description of [SparseSymLinearSolverInterface](#) base class.

Definition at line 24 of file IpWsmSolverInterface.hpp.

3.190.2 Member Function Documentation

3.190.2.1 `virtual ESymSolverStatus Ipopt::WsmpSolverInterface::InitializeStructure ( Index dim, Index nonzeros, const Index * ia, const Index * ja ) [virtual]`

Method for initializing internal structures.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.190.2.2 `virtual double* Ipopt::WsmpSolverInterface::GetValuesArrayPtr ( ) [virtual]`

Method returning an internal array into which the nonzero elements are to be stored.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.190.2.3 `virtual ESymSolverStatus Ipopt::WsmpSolverInterface::MultiSolve ( bool new_matrix, const Index * ia, const Index * ja, Index nrhs, double * rhs_vals, bool check_NegEvals, Index numberOfNegEvals ) [virtual]`

Solve operation for multiple right hand sides.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

3.190.2.4 `virtual bool Ipopt::WsmpSolverInterface::ProvidesInertia ( ) const [inline], [virtual]`

Query whether inertia is computed by linear solver.

Returns true, if linear solver provides inertia.

Implements [Ipopt::SparseSymLinearSolverInterface](#).

Definition at line 76 of file `IpWsmpSolverInterface.hpp`.

3.190.2.5 `virtual bool Ipopt::WsmpSolverInterface::ProvidesDegeneracyDetection ( ) const [virtual]`

Query whether the indices of linearly dependent rows/columns can be determined by this linear solver.

Reimplemented from [Ipopt::SparseSymLinearSolverInterface](#).

3.190.2.6 `virtual ESymSolverStatus Ipopt::WsmpSolverInterface::DetermineDependentRows ( const Index * ia, const Index * ja, std::list< Index > & c_deps ) [virtual]`

This method determines the list of row indices of the linearly dependent rows.

Reimplemented from [Ipopt::SparseSymLinearSolverInterface](#).

The documentation for this class was generated from the following file:


- `IpWsmpSolverInterface.hpp`

3.191 Ipopt::ZeroMatrix Class Reference

Class for Matrices with only zero entries.

```
#include <IpZeroMatrix.hpp>
```

Inheritance diagram for Ipopt::ZeroMatrix:

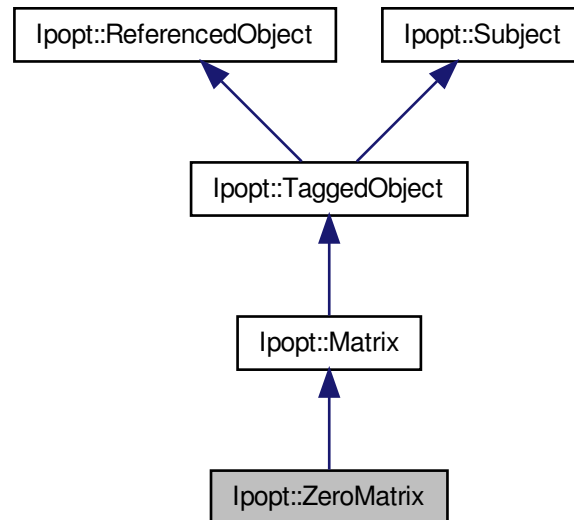

Public Member Functions

Constructors / Destructors

- **ZeroMatrix** (const [MatrixSpace](#) *owner_space)
Constructor, taking the corresponding matrix space.
- **~ZeroMatrix** ()
Destructor.

Protected Member Functions

Methods overloaded from matrix

- virtual void **MultVectorImpl** (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix-vector multiply.
- virtual void **TransMultVectorImpl** (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix(transpose) vector multiply.
- virtual void **ComputeRowAMaxImpl** ([Vector](#) &rows_norms, bool init) const
Compute the max-norm of the rows in the matrix.
- virtual void **ComputeColAMaxImpl** ([Vector](#) &cols_norms, bool init) const
Compute the max-norm of the columns in the matrix.
- virtual void **PrintImpl** (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
Print detailed information about the matrix.

Additional Inherited Members

3.191.1 Detailed Description

Class for Matrices with only zero entries.

Definition at line 20 of file IpZeroMatrix.hpp.

3.191.2 Member Function Documentation

3.191.2.1 `virtual void Ipopt::ZeroMatrix::MultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const` `[protected]`, `[virtual]`

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.191.2.2 `virtual void Ipopt::ZeroMatrix::TransMultVectorImpl ( Number alpha, const Vector & x, Number beta, Vector & y ) const` `[protected]`, `[virtual]`

Matrix(transpose) vector multiply.

Computes $y = \alpha * \text{Matrix}^T * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.191.2.3 `virtual void Ipopt::ZeroMatrix::ComputeRowAMaxImpl ( Vector & rows_norms, bool init ) const` `[inline]`, `[protected]`, `[virtual]`

Compute the max-norm of the rows in the matrix.

The result is stored in *rows_norms*. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

Definition at line 44 of file IpZeroMatrix.hpp.

3.191.2.4 `virtual void Ipopt::ZeroMatrix::ComputeColAMaxImpl ( Vector & cols_norms, bool init ) const` `[inline]`, `[protected]`, `[virtual]`

Compute the max-norm of the columns in the matrix.

The result is stored in *cols_norms*. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

Definition at line 47 of file IpZeroMatrix.hpp.

3.191.2.5 `virtual void Ipopt::ZeroMatrix::PrintImpl ( const Journalist & jnlst, EJournalLevel level, EJournalCategory category, const std::string & name, Index indent, const std::string & prefix ) const` `[protected]`, `[virtual]`

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

The documentation for this class was generated from the following file:


- IpZeroMatrix.hpp

3.192 Ipopt::ZeroMatrixSpace Class Reference

Class for matrix space for [ZeroMatrix](#).

```
#include <IpZeroMatrix.hpp>
```

Inheritance diagram for Ipopt::ZeroMatrixSpace:

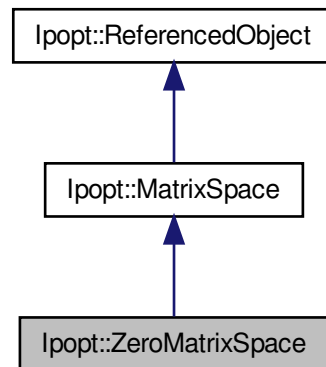

Public Member Functions

- virtual [Matrix](#) * [MakeNew](#) () const
Overloaded MakeNew method for the [MatrixSpace](#) base class.
- [ZeroMatrix](#) * [MakeNewZeroMatrix](#) () const
Method for creating a new matrix of this specific type.

Constructors / Destructors

- [ZeroMatrixSpace](#) (Index nrow, Index ncol)
Constructor, given the number of row and columns.
- virtual [~ZeroMatrixSpace](#) ()
Destructor.

3.192.1 Detailed Description

Class for matrix space for [ZeroMatrix](#).

Definition at line 79 of file IpZeroMatrix.hpp.

3.192.2 Member Function Documentation

3.192.2.1 [ZeroMatrix](#)* Ipopt::ZeroMatrixSpace::MakeNewZeroMatrix () const [inline]

Method for creating a new matrix of this specific type.

Definition at line 104 of file IpZeroMatrix.hpp.

The documentation for this class was generated from the following file:


- IpZeroMatrix.hpp

3.193 Ipopt::ZeroSymMatrix Class Reference

Class for Symmetric Matrices with only zero entries.

```
#include <IpZeroSymMatrix.hpp>
```

Inheritance diagram for Ipopt::ZeroSymMatrix:

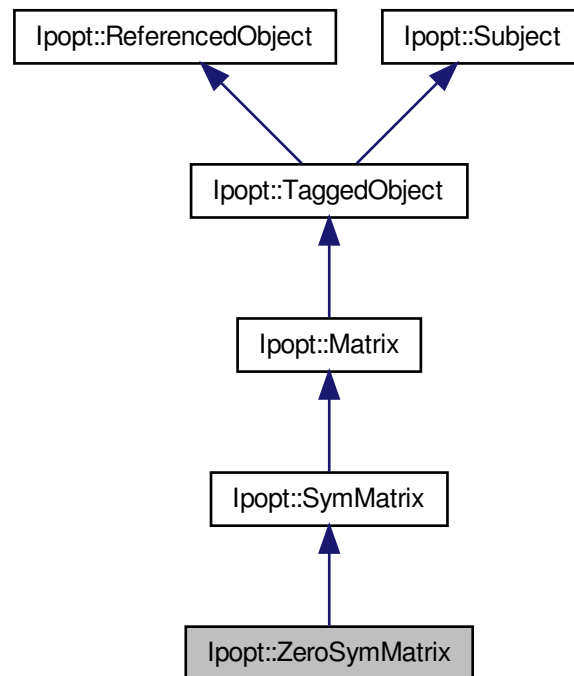

Public Member Functions

Constructors / Destructors

- [ZeroSymMatrix](#) (const [SymMatrixSpace](#) *owner_space)
Constructor, taking the corresponding matrix space.
- [~ZeroSymMatrix](#) ()
Destructor.

Protected Member Functions

Methods overloaded from matrix

- virtual void [MultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Matrix-vector multiply.
- virtual void [TransMultVectorImpl](#) (Number alpha, const [Vector](#) &x, Number beta, [Vector](#) &y) const
Since the matrix is symmetric, it is only necessary to implement the MultVectorImpl method in a class that inherits from this base class.
- virtual void [ComputeRowAMaxImpl](#) ([Vector](#) &rows_norms, bool init) const
Compute the max-norm of the rows in the matrix.
- virtual void [ComputeColAMaxImpl](#) ([Vector](#) &cols_norms, bool init) const
Since the matrix is symmetric, the row and column max norms are identical.
- virtual void [PrintImpl](#) (const [Journalist](#) &jnlst, EJournalLevel level, EJournalCategory category, const std::string &name, Index indent, const std::string &prefix) const
Print detailed information about the matrix.

Additional Inherited Members

3.193.1 Detailed Description

Class for Symmetric Matrices with only zero entries.

Definition at line 20 of file IpZeroSymMatrix.hpp.

3.193.2 Member Function Documentation

3.193.2.1 virtual void Ipopt::ZeroSymMatrix::MultVectorImpl (Number *alpha*, const [Vector](#) & *x*, Number *beta*, [Vector](#) & *y*) const
[protected], [virtual]

Matrix-vector multiply.

Computes $y = \alpha * \text{Matrix} * x + \beta * y$

Implements [Ipopt::Matrix](#).

3.193.2.2 virtual void Ipopt::ZeroSymMatrix::TransMultVectorImpl (Number *alpha*, const [Vector](#) & *x*, Number *beta*, [Vector](#) & *y*) const
[protected], [virtual]

Since the matrix is symmetric, it is only necessary to implement the MultVectorImpl method in a class that inherits from this base class.

If the TransMultVectorImpl is called, this base class automatically calls MultVectorImpl instead.

Reimplemented from [Ipopt::SymMatrix](#).

3.193.2.3 virtual void Ipopt::ZeroSymMatrix::ComputeRowAMaxImpl ([Vector](#) & *rows_norms*, bool *init*) const [inline],
[protected], [virtual]

Compute the max-norm of the rows in the matrix.

The result is stored in rows_norms. The vector is assumed to be initialized.

Implements [Ipopt::Matrix](#).

Definition at line 44 of file IpZeroSymMatrix.hpp.

3.193.2.4 virtual void Ipopt::ZeroSymMatrix::PrintImpl (const Journalist & *jnlst*, EJournalLevel *level*, EJournalCategory *category*, const std::string & *name*, Index *indent*, const std::string & *prefix*) const [protected], [virtual]

Print detailed information about the matrix.

Implements [Ipopt::Matrix](#).

The documentation for this class was generated from the following file:


- IpZeroSymMatrix.hpp

3.194 Ipopt::ZeroSymMatrixSpace Class Reference

Class for matrix space for [ZeroSymMatrix](#).

```
#include <IpZeroSymMatrix.hpp>
```

Inheritance diagram for Ipopt::ZeroSymMatrixSpace:

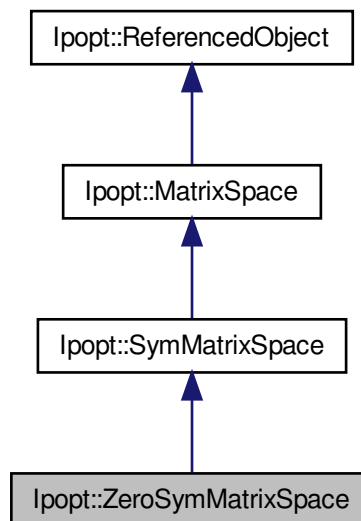

Public Member Functions

- virtual [Matrix](#) * [MakeNew](#) () const
Overloaded MakeNew method for the [MatrixSpace](#) base class.
- virtual [SymMatrix](#) * [MakeNewSymMatrix](#) () const
Overloaded method from [SymMatrixSpace](#) base class.
- [ZeroSymMatrix](#) * [MakeNewZeroSymMatrix](#) () const
Method for creating a new matrix of this specific type.

Constructors / Destructors

- [ZeroSymMatrixSpace](#) (Index dim)
Constructor, given the number of row and columns.
- virtual [~ZeroSymMatrixSpace](#) ()
Destructor.

3.194.1 Detailed Description

Class for matrix space for [ZeroSymMatrix](#).

Definition at line 79 of file IpZeroSymMatrix.hpp.

3.194.2 Member Function Documentation

3.194.2.1 `ZeroSymMatrix* Ipopt::ZeroSymMatrixSpace::MakeNewZeroSymMatrix ( ) const` `[inline]`

Method for creating a new matrix of this specific type.

Definition at line 111 of file IpZeroSymMatrix.hpp.

The documentation for this class was generated from the following file:

- IpZeroSymMatrix.hpp

Index

- ~DependentResult
 - Ipopt::DependentResult, [96](#)
- ~FileJournal
 - Ipopt::FileJournal, [116](#)
- ~Journal
 - Ipopt::Journal, [208](#)
- ~Journalist
 - Ipopt::Journalist, [210](#)
- ~SmartPtr
 - Ipopt::SmartPtr, [350](#)
- ~StreamJournal
 - Ipopt::StreamJournal, [368](#)
- ~TaggedObject
 - Ipopt::TaggedObject, [394](#)
- AcceptTrialPoint
 - Ipopt::CGPenaltyData, [49](#)
 - Ipopt::InexactData, [143](#)
 - Ipopt::IpoptAdditionalData, [163](#)
 - Ipopt::IpoptData, [181](#)
- Acceptable
 - Ipopt::Filter, [117](#)
 - Ipopt::FilterEntry, [118](#)
 - Ipopt::PiecewisePenalty, [310](#)
- acceptable_iter_
 - Ipopt::OptimalityErrorConvergenceCheck, [286](#)
- acceptable_obj_change_tol_
 - Ipopt::OptimalityErrorConvergenceCheck, [286](#)
- ActivateFallbackMechanism
 - Ipopt::BacktrackingLineSearch, [39](#)
 - Ipopt::LineSearch, [216](#)
- AddEntry
 - Ipopt::Filter, [117](#)
- AddFileJournal
 - Ipopt::Journalist, [211](#)
- AddJournal
 - Ipopt::Journalist, [211](#)
- AddMSInvZ
 - Ipopt::Matrix, [250](#)
- AddMSInvZImpl
 - Ipopt::CompoundMatrix, [60](#)
 - Ipopt::ExpansionMatrix, [112](#)
 - Ipopt::IdentityMatrix, [136](#)
 - Ipopt::Matrix, [251](#)
 - Ipopt::ScaledMatrix, [343](#)
- AddMatrix
 - Ipopt::DenseSymMatrix, [86](#)
- AddMatrixProduct
 - Ipopt::DenseGenMatrix, [80](#)
- AddOneVector
 - Ipopt::Vector, [431](#)
- AddRightMultMatrix
 - Ipopt::MultiVectorMatrix, [261](#)
- AddScalarImpl
 - Ipopt::CompoundVector, [71](#)
 - Ipopt::DenseVector, [92](#)
- AddTwoVectors
 - Ipopt::Vector, [431](#)
- AddTwoVectorsImpl
 - Ipopt::CompoundVector, [71](#)
 - Ipopt::DenseVector, [92](#)
 - Ipopt::Vector, [431](#)
- AddVectorQuotient
 - Ipopt::Vector, [431](#)
- AddVectorQuotientImpl
 - Ipopt::CompoundVector, [71](#)
 - Ipopt::DenseVector, [93](#)
- AdjustVariableBounds
 - Ipopt::IpoptNLP, [186](#)
 - Ipopt::OrigIpoptNLP, [291](#)
 - Ipopt::RestoIpoptNLP, [331](#)
- AmplTNLP
 - Ipopt::AmplTNLP, [30](#)
- apply_grad_obj_scaling_NonConst
 - Ipopt::NLPScalingObject, [280](#)
- apply_jac_c_scaling
 - Ipopt::NLPScalingObject, [280](#)
 - Ipopt::StandardScalingBase, [360](#)
- apply_obj_scaling
 - Ipopt::NLPScalingObject, [280](#)
 - Ipopt::StandardScalingBase, [360](#)
- apply_vector_scaling_x_LU_NonConst
 - Ipopt::NLPScalingObject, [280](#)
- AttachObserver
 - Ipopt::Subject, [370](#)
- AugRestoSystemSolver
 - Ipopt::AugRestoSystemSolver, [33](#)
- AugSystemSolver
 - Ipopt::AugSystemSolver, [35](#)
- BacktrackingLSAcceptor
 - Ipopt::BacktrackingLSAcceptor, [40](#)
- BacktrackingLineSearch
 - Ipopt::BacktrackingLineSearch, [38](#)
- CONTINUE
 - Ipopt::IterativeSolverTerminationTester, [203](#)
- CSR_Format_0_Offset
 - Ipopt::SparseSymLinearSolverInterface, [356](#)
- CSR_Format_1_Offset
 - Ipopt::SparseSymLinearSolverInterface, [356](#)
- CSR_Full_Format_0_Offset
 - Ipopt::SparseSymLinearSolverInterface, [356](#)

- CSR_Full_Format_1_Offset
 - Ipopt::SparseSymLinearSolverInterface, [356](#)
- CGPenaltyLSAcceptor
 - Ipopt::CGPenaltyLSAcceptor, [51](#)
- CachedResults
 - Ipopt::CachedResults, [45](#)
- CalcCentralityMeasure
 - Ipopt::IpoptCalculatedQuantities, [175](#)
- CalculateAlphaMin
 - Ipopt::BacktrackingLSAcceptor, [41](#)
 - Ipopt::CGPenaltyLSAcceptor, [52](#)
 - Ipopt::FilterLSAcceptor, [121](#)
 - Ipopt::InexactLSAcceptor, [148](#)
 - Ipopt::PenaltyLSAcceptor, [308](#)
- CalculateMu
 - Ipopt::MuOracle, [267](#)
- CalculateMultipliers
 - Ipopt::EqMultiplierCalculator, [103](#)
 - Ipopt::LeastSquareMultipliers, [213](#)
- CheckAcceptabilityOfTrialPoint
 - Ipopt::BacktrackingLSAcceptor, [41](#)
 - Ipopt::CGPenaltyLSAcceptor, [52](#)
 - Ipopt::FilterLSAcceptor, [121](#)
 - Ipopt::InexactLSAcceptor, [148](#)
 - Ipopt::PenaltyLSAcceptor, [308](#)
- CheckConvergence
 - Ipopt::ConvergenceCheck, [75](#)
- CholeskyBackSolveMatrix
 - Ipopt::DenseGenMatrix, [81](#)
- CholeskySolveMatrix
 - Ipopt::DenseGenMatrix, [81](#)
- CholeskySolveVector
 - Ipopt::DenseGenMatrix, [81](#)
- Clear
 - Ipopt::InexactNormalTerminationTester, [154](#)
 - Ipopt::InexactPDTerminationTester, [158](#)
 - Ipopt::IterativeSolverTerminationTester, [204](#)
- clone
 - Ipopt::IpoptApplication, [167](#)
- CompoundMatrix
 - Ipopt::CompoundMatrix, [59](#)
- CompoundSymMatrix
 - Ipopt::CompoundSymMatrix, [64](#)
- CompoundVector
 - Ipopt::CompoundVector, [70](#)
- CompoundVectorSpace
 - Ipopt::CompoundVectorSpace, [73](#)
- CompressedPosIndices
 - Ipopt::ExpansionMatrix, [111](#)
 - Ipopt::ExpansionMatrixSpace, [114](#)
- ComputeAlphaForY
 - Ipopt::BacktrackingLSAcceptor, [43](#)
- ComputeCholeskyFactor
 - Ipopt::DenseGenMatrix, [81](#)
- ComputeColAMax
 - Ipopt::Matrix, [250](#)
- ComputeColAMaxImpl
 - Ipopt::CompoundMatrix, [60](#)
 - Ipopt::DenseGenMatrix, [82](#)
 - Ipopt::ExpandedMultiVectorMatrix, [108](#)
 - Ipopt::ExpansionMatrix, [112](#)
 - Ipopt::GenTMatrix, [129](#)
 - Ipopt::Matrix, [252](#)
 - Ipopt::MultiVectorMatrix, [262](#)
 - Ipopt::ScaledMatrix, [343](#)
 - Ipopt::SumMatrix, [373](#)
 - Ipopt::TransposeMatrix, [414](#)
 - Ipopt::ZeroMatrix, [439](#)
- ComputeEigenVectors
 - Ipopt::DenseGenMatrix, [81](#)
- ComputeLUFactorInPlace
 - Ipopt::DenseGenMatrix, [81](#)
- ComputeNewtonNormalStep
 - Ipopt::InexactNewtonNormalStep, [150](#)
- ComputeNormalStep
 - Ipopt::InexactDoglegNormalStep, [145](#)
 - Ipopt::InexactNormalStepCalculator, [152](#)
- ComputeRowAMax
 - Ipopt::Matrix, [250](#)
- ComputeRowAMaxImpl
 - Ipopt::CompoundMatrix, [60](#)
 - Ipopt::CompoundSymMatrix, [65](#)
 - Ipopt::DenseGenMatrix, [82](#)
 - Ipopt::DenseSymMatrix, [87](#)
 - Ipopt::DiagMatrix, [99](#)
 - Ipopt::ExpandedMultiVectorMatrix, [108](#)
 - Ipopt::ExpansionMatrix, [112](#)
 - Ipopt::GenTMatrix, [129](#)
 - Ipopt::IdentityMatrix, [136](#)
 - Ipopt::LowRankUpdateSymMatrix, [225](#)
 - Ipopt::Matrix, [251](#)
 - Ipopt::MultiVectorMatrix, [262](#)
 - Ipopt::ScaledMatrix, [343](#)
 - Ipopt::SumMatrix, [372](#)
 - Ipopt::SumSymMatrix, [376](#)
 - Ipopt::SymScaledMatrix, [385](#)
 - Ipopt::SymTMatrix, [390](#)
 - Ipopt::TransposeMatrix, [414](#)
 - Ipopt::ZeroMatrix, [439](#)
 - Ipopt::ZeroSymMatrix, [442](#)
- ComputeSearchDirection
 - Ipopt::CGSearchDirCalculator, [57](#)
 - Ipopt::InexactSearchDirCalculator, [159](#)
 - Ipopt::PDSearchDirCalculator, [304](#)
 - Ipopt::SearchDirectionCalculator, [346](#)
- ComputeSymTScalingFactors
 - Ipopt::InexactTSymScalingMethod, [161](#)
 - Ipopt::Mc19TSymScalingMethod, [255](#)

- [Ipopt::SlackBasedTSymScalingMethod](#), 347
 - [Ipopt::TSymScalingMethod](#), 424
- [ConsiderNewSystem](#)
 - [Ipopt::CGPerturbationHandler](#), 55
 - [Ipopt::PDPerturbationHandler](#), 300
- [ConvertValues](#)
 - [Ipopt::TripletToCSRConverter](#), 418
- [Copy](#)
 - [Ipopt::Vector](#), 431
- [CopyFromPos](#)
 - [Ipopt::DenseVector](#), 92
- [CopyImpl](#)
 - [Ipopt::CompoundVector](#), 70
 - [Ipopt::DenseVector](#), 92
 - [Ipopt::Vector](#), 431
- [CopyToPos](#)
 - [Ipopt::DenseVector](#), 92
- [cpu_time_start](#)
 - [Ipopt::IpoptData](#), 181
- [create_new_s_copy](#)
 - [Ipopt::IteratesVector](#), 192
- [create_new_v_L_copy](#)
 - [Ipopt::IteratesVector](#), 194
- [create_new_v_U_copy](#)
 - [Ipopt::IteratesVector](#), 195
- [create_new_x_copy](#)
 - [Ipopt::IteratesVector](#), 191
- [create_new_y_c_copy](#)
 - [Ipopt::IteratesVector](#), 192
- [create_new_y_d_copy](#)
 - [Ipopt::IteratesVector](#), 193
- [create_new_z_L_copy](#)
 - [Ipopt::IteratesVector](#), 193
- [create_new_z_U_copy](#)
 - [Ipopt::IteratesVector](#), 194
- [curr_Wu_s](#)
 - [Ipopt::InexactCq](#), 141
- [curr_Wu_x](#)
 - [Ipopt::InexactCq](#), 141
- [curr_barrier_error](#)
 - [Ipopt::IpoptCalculatedQuantities](#), 175
- [curr_cg_pert_fact](#)
 - [Ipopt::CGPenaltyCq](#), 47
- [curr_constraint_violation](#)
 - [Ipopt::IpoptCalculatedQuantities](#), 174
- [curr_gradBarrTDelta](#)
 - [Ipopt::IpoptCalculatedQuantities](#), 176
- [curr_jac_cdT_times_curr_cdminuss](#)
 - [Ipopt::InexactCq](#), 141
- [curr_nlp_constraint_violation](#)
 - [Ipopt::IpoptCalculatedQuantities](#), 175
- [curr_nlp_error](#)
 - [Ipopt::IpoptCalculatedQuantities](#), 175
- [curr_primal_dual_system_error](#)
 - [Ipopt::IpoptCalculatedQuantities](#), 175
- [curr_primal_infeasibility](#)
 - [Ipopt::IpoptCalculatedQuantities](#), 175
- [curr_uWu](#)
 - [Ipopt::InexactCq](#), 141
- [CurrentIsAcceptable](#)
 - [Ipopt::ConvergenceCheck](#), 75
- [DR_x](#)
 - [Ipopt::RestIpoptNLP](#), 331
- [DebugPrint](#)
 - [Ipopt::DependentResult](#), 97
- [DefaultIterateInitializer](#)
 - [Ipopt::DefaultIterateInitializer](#), 77
- [degen_iters_](#)
 - [Ipopt::PDPerturbationHandler](#), 301
- [degen_iters_max_](#)
 - [Ipopt::PDPerturbationHandler](#), 302
- [DeleteAllJournals](#)
 - [Ipopt::Journalist](#), 211
- [delta](#)
 - [Ipopt::IpoptData](#), 180
- [delta_cd_exp_](#)
 - [Ipopt::PDPerturbationHandler](#), 302
- [delta_cd_val_](#)
 - [Ipopt::PDPerturbationHandler](#), 302
- [delta_xs_dec_fact_](#)
 - [Ipopt::PDPerturbationHandler](#), 302
- [delta_xs_first_inc_fact_](#)
 - [Ipopt::PDPerturbationHandler](#), 301
- [delta_xs_inc_fact_](#)
 - [Ipopt::PDPerturbationHandler](#), 301
- [delta_xs_init_](#)
 - [Ipopt::PDPerturbationHandler](#), 302
- [delta_xs_max_](#)
 - [Ipopt::PDPerturbationHandler](#), 301
- [delta_xs_min_](#)
 - [Ipopt::PDPerturbationHandler](#), 301
- [DenseGenMatrixSpace](#)
 - [Ipopt::DenseGenMatrixSpace](#), 83
- [DenseSymMatrixSpace](#)
 - [Ipopt::DenseSymMatrixSpace](#), 88
- [DependentResult](#)
 - [Ipopt::DependentResult](#), 96
- [DerivativeTestEnum](#)
 - [Ipopt::TNLPAdapter](#), 407
- [DetachObserver](#)
 - [Ipopt::Subject](#), 370
- [DetermineDependentRows](#)
 - [Ipopt::Ma28TDependencyDetector](#), 231
 - [Ipopt::Ma77SolverInterface](#), 238
 - [Ipopt::Ma86SolverInterface](#), 242
 - [Ipopt::Ma97SolverInterface](#), 247
 - [Ipopt::MumpsSolverInterface](#), 266

- Ipopt::SparseSymLinearSolverInterface, 358
- Ipopt::TDependencyDetector, 396
- Ipopt::TSymDependencyDetector, 420
- Ipopt::TSymLinearSolver, 423
- Ipopt::WsmpSolverInterface, 437
- DetermineScalingParametersImpl
 - Ipopt::EquilibrationScaling, 104
 - Ipopt::GradientScaling, 132
 - Ipopt::StandardScalingBase, 361
 - Ipopt::UserScaling, 426
- DiagMatrix
 - Ipopt::DiagMatrix, 99
- DiagMatrixSpace
 - Ipopt::DiagMatrixSpace, 101
- Dim
 - Ipopt::IdentityMatrix, 135
 - Ipopt::VectorSpace, 433
- DoFallback
 - Ipopt::BacktrackingLSAcceptor, 42
 - Ipopt::CGPenaltyLSAcceptor, 53
- Dominated
 - Ipopt::FilterEntry, 118
- EMatrixFormat
 - Ipopt::SparseSymLinearSolverInterface, 356
- ETerminationTest
 - Ipopt::IterativeSolverTerminationTester, 203
- ETriFull
 - Ipopt::TripletToCSRConverter, 418
- ElementWiseDivideImpl
 - Ipopt::CompoundVector, 71
 - Ipopt::DenseVector, 92
- ElementWiseMultiplyImpl
 - Ipopt::CompoundVector, 71
 - Ipopt::DenseVector, 92
- End
 - Ipopt::TimedTask, 397
- EndIfStarted
 - Ipopt::TimedTask, 397
- EqMultiplierCalculator
 - Ipopt::EqMultiplierCalculator, 103
- eval_f
 - Ipopt::AmplTNLP, 30
 - Ipopt::StdInterfaceTNLP, 366
- eval_g
 - Ipopt::AmplTNLP, 31
 - Ipopt::StdInterfaceTNLP, 366
- eval_grad_f
 - Ipopt::AmplTNLP, 31
 - Ipopt::StdInterfaceTNLP, 366
 - Ipopt::TNLP, 403
 - Ipopt::TNLPReducer, 411
- eval_h
 - Ipopt::AmplTNLP, 31
- Ipopt::StdInterfaceTNLP, 367
- Ipopt::TNLP, 404
- Ipopt::TNLPReducer, 412
- eval_jac_g
 - Ipopt::AmplTNLP, 31
 - Ipopt::StdInterfaceTNLP, 366
 - Ipopt::TNLP, 403
 - Ipopt::TNLPReducer, 411
- ExpandedPosIndices
 - Ipopt::ExpansionMatrix, 111
 - Ipopt::ExpansionMatrixSpace, 114
- ExpandedValues
 - Ipopt::DenseVector, 92
- ExpansionMatrixSpace
 - Ipopt::ExpansionMatrixSpace, 114
- f
 - Ipopt::IpoptNLP, 186
 - Ipopt::OrigIpoptNLP, 291
- FileJournal
 - Ipopt::FileJournal, 116
- FillIdentity
 - Ipopt::DenseGenMatrix, 80
 - Ipopt::DenseSymMatrix, 86
- FillWithNewVectors
 - Ipopt::MultiVectorMatrix, 261
- FilterLSAcceptor
 - Ipopt::FilterLSAcceptor, 120
- finalize_metadata
 - Ipopt::TNLP, 404
- finalize_test
 - Ipopt::PDPerturbationHandler, 301
- FinalizeSolution
 - Ipopt::NLP, 272
 - Ipopt::NLPBoundsRemover, 276
 - Ipopt::TNLPAdapter, 408
- FindAcceptableTrialPoint
 - Ipopt::BacktrackingLineSearch, 38
 - Ipopt::LineSearch, 216
- FlushBuffer
 - Ipopt::Journal, 208
 - Ipopt::Journalist, 211
- FlushBufferImpl
 - Ipopt::FileJournal, 116
 - Ipopt::Journal, 208
 - Ipopt::StreamJournal, 368
- FracToBound
 - Ipopt::Vector, 431
- FracToBoundImpl
 - Ipopt::CompoundVector, 71
 - Ipopt::DenseVector, 93
 - Ipopt::Vector, 432
- Full_Format
 - Ipopt::TripletToCSRConverter, 418

- GenTMatrixSpace
 - Ipopt::GenTMatrixSpace, [131](#)
- get_bounds_info
 - Ipopt::AmplTNLP, [30](#)
 - Ipopt::StdInterfaceTNLP, [366](#)
 - Ipopt::TNLP, [402](#)
 - Ipopt::TNLPReducer, [410](#)
- get_constraints_linearity
 - Ipopt::AmplTNLP, [30](#)
 - Ipopt::TNLP, [403](#)
 - Ipopt::TNLPReducer, [411](#)
- get_deltas_for_wrong_inertia
 - Ipopt::PDPerturbationHandler, [301](#)
- get_deltas_for_wrong_inertia_called_
 - Ipopt::PDPerturbationHandler, [301](#)
- get_discrete_info
 - Ipopt::AmplTNLP, [31](#)
- get_nlp_info
 - Ipopt::AmplTNLP, [30](#)
 - Ipopt::StdInterfaceTNLP, [365](#)
- get_scaling_parameters
 - Ipopt::AmplTNLP, [31](#)
 - Ipopt::StdInterfaceTNLP, [366](#)
 - Ipopt::TNLP, [402](#)
 - Ipopt::TNLPReducer, [410](#)
- get_starting_point
 - Ipopt::AmplTNLP, [30](#)
 - Ipopt::StdInterfaceTNLP, [366](#)
 - Ipopt::TNLP, [403](#)
 - Ipopt::TNLPReducer, [411](#)
- get_variables_linearity
 - Ipopt::TNLP, [403](#)
 - Ipopt::TNLPReducer, [411](#)
- get_warm_start_iterate
 - Ipopt::TNLP, [403](#)
 - Ipopt::TNLPReducer, [411](#)
- GetBlockCols
 - Ipopt::CompoundMatrixSpace, [62](#)
- GetBlockRows
 - Ipopt::CompoundMatrixSpace, [62](#)
- GetComp
 - Ipopt::CompoundSymMatrix, [64](#)
- GetCompNonConst
 - Ipopt::CompoundMatrix, [59](#)
 - Ipopt::CompoundSymMatrix, [64](#)
 - Ipopt::CompoundVector, [70](#)
- GetDiag
 - Ipopt::DiagMatrix, [99](#)
 - Ipopt::LowRankUpdateSymMatrix, [224](#)
- GetExpansionMatrix
 - Ipopt::ExpandedMultiVectorMatrix, [107](#)
- GetFactor
 - Ipopt::IdentityMatrix, [135](#)
- GetIpoptNLP
 - Ipopt::IpoptCalculatedQuantities, [176](#)
- GetJournal
 - Ipopt::Journalist, [211](#)
- GetQuasiNewtonApproximationSpaces
 - Ipopt::NLP, [273](#)
 - Ipopt::NLPBoundsRemover, [277](#)
 - Ipopt::TNLPAdapter, [408](#)
- GetRawPtr
 - Ipopt::SmartPtr, [351](#)
- GetResult
 - Ipopt::DependentResult, [96](#)
- GetScalingParameters
 - Ipopt::NLP, [273](#)
 - Ipopt::NLPBoundsRemover, [277](#)
 - Ipopt::TNLPAdapter, [407](#)
- GetSpaces
 - Ipopt::IpoptNLP, [186](#)
 - Ipopt::NLP, [271](#)
 - Ipopt::NLPBoundsRemover, [276](#)
 - Ipopt::TNLPAdapter, [407](#)
- GetStartingPoint
 - Ipopt::NLP, [272](#)
 - Ipopt::NLPBoundsRemover, [276](#)
 - Ipopt::TNLPAdapter, [407](#)
- GetTagSum
 - Ipopt::IteratesVector, [195](#)
- GetTerm
 - Ipopt::SumMatrix, [372](#)
 - Ipopt::SumSymMatrix, [376](#)
- GetU
 - Ipopt::LowRankUpdateSymMatrix, [224](#)
- GetV
 - Ipopt::LowRankUpdateSymMatrix, [224](#)
- GetValuesArrayPtr
 - Ipopt::IterativePardisoSolverInterface, [201](#)
 - Ipopt::IterativeWsmvSolverInterface, [206](#)
 - Ipopt::Ma27TSolverInterface, [229](#)
 - Ipopt::Ma57TSolverInterface, [233](#)
 - Ipopt::Ma77SolverInterface, [237](#)
 - Ipopt::Ma86SolverInterface, [241](#)
 - Ipopt::Ma97SolverInterface, [246](#)
 - Ipopt::MumpsSolverInterface, [265](#)
 - Ipopt::PardisoSolverInterface, [294](#)
 - Ipopt::SparseSymLinearSolverInterface, [357](#)
 - Ipopt::WsmvSolverInterface, [437](#)
- GetVectorNonConst
 - Ipopt::MultiVectorMatrix, [261](#)
- GetWarmStartIterate
 - Ipopt::NLP, [272](#)
 - Ipopt::NLPBoundsRemover, [276](#)
 - Ipopt::TNLPAdapter, [407](#)
- IsValidNumbers
 - Ipopt::Matrix, [250](#)

- Ipopt::Vector, [431](#)
- HasValidNumbersImpl
 - Ipopt::CompoundMatrix, [60](#)
 - Ipopt::CompoundSymMatrix, [65](#)
 - Ipopt::CompoundVector, [71](#)
 - Ipopt::DenseGenMatrix, [82](#)
 - Ipopt::DenseSymMatrix, [86](#)
 - Ipopt::DiagMatrix, [99](#)
 - Ipopt::ExpandedMultiVectorMatrix, [108](#)
 - Ipopt::GenTMatrix, [129](#)
 - Ipopt::IdentityMatrix, [136](#)
 - Ipopt::LowRankUpdateSymMatrix, [225](#)
 - Ipopt::Matrix, [251](#)
 - Ipopt::MultiVectorMatrix, [262](#)
 - Ipopt::ScaledMatrix, [342](#)
 - Ipopt::SumMatrix, [372](#)
 - Ipopt::SumSymMatrix, [376](#)
 - Ipopt::SymScaledMatrix, [385](#)
 - Ipopt::SymTMatrix, [390](#)
 - Ipopt::TransposeMatrix, [414](#)
 - Ipopt::Vector, [432](#)
- have_c_scaling
 - Ipopt::NLPScalingObject, [280](#)
 - Ipopt::StandardScalingBase, [361](#)
- have_d_scaling
 - Ipopt::NLPScalingObject, [280](#)
 - Ipopt::StandardScalingBase, [361](#)
- have_x_scaling
 - Ipopt::NLPScalingObject, [280](#)
 - Ipopt::StandardScalingBase, [361](#)
- HaveAffineDeltas
 - Ipopt::IpoptData, [181](#)
- HaveDeltas
 - Ipopt::IpoptData, [180](#)
- hess_degenerate_
 - Ipopt::PDPerturbationHandler, [301](#)
- HighRankUpdate
 - Ipopt::DenseSymMatrix, [86](#)
- HighRankUpdateTranspose
 - Ipopt::DenseGenMatrix, [80](#)
 - Ipopt::DenseSymMatrix, [86](#)
- IA
 - Ipopt::TripletToCSRConverter, [418](#)
- IdentityMatrixSpace
 - Ipopt::IdentityMatrixSpace, [137](#)
- IncreaseQuality
 - Ipopt::AugRestoSystemSolver, [33](#)
 - Ipopt::AugSystemSolver, [36](#)
 - Ipopt::GenAugSystemSolver, [123](#)
 - Ipopt::GenKKTsSolverInterface, [126](#)
 - Ipopt::LowRankAugSystemSolver, [219](#)
 - Ipopt::LowRankSSAugSystemSolver, [221](#)
 - Ipopt::Ma27TSolverInterface, [229](#)
 - Ipopt::Ma57TSolverInterface, [234](#)
 - Ipopt::Ma77SolverInterface, [238](#)
 - Ipopt::Ma86SolverInterface, [242](#)
 - Ipopt::Ma97SolverInterface, [247](#)
 - Ipopt::MumpsSolverInterface, [266](#)
 - Ipopt::SparseSymLinearSolverInterface, [357](#)
 - Ipopt::StdAugSystemSolver, [363](#)
 - Ipopt::SymLinearSolver, [380](#)
 - Ipopt::TSymLinearSolver, [423](#)
- IndexStyleEnum
 - Ipopt::TNLP, [402](#)
- InexactLSAcceptor
 - Ipopt::InexactLSAcceptor, [147](#)
- InitThisLineSearch
 - Ipopt::BacktrackingLSAcceptor, [41](#)
 - Ipopt::CGPenaltyLSAcceptor, [51](#)
 - Ipopt::FilterLSAcceptor, [120](#)
 - Ipopt::InexactLSAcceptor, [148](#)
 - Ipopt::PenaltyLSAcceptor, [308](#)
- Initialize
 - Ipopt::AlgorithmStrategyObject, [23](#)
 - Ipopt::CGPenaltyCq, [47](#)
 - Ipopt::CGPenaltyData, [49](#)
 - Ipopt::InexactCq, [141](#)
 - Ipopt::InexactData, [143](#)
 - Ipopt::IpoptAdditionalCq, [162](#)
 - Ipopt::IpoptAdditionalData, [163](#)
 - Ipopt::IpoptApplication, [167](#), [168](#)
 - Ipopt::IpoptCalculatedQuantities, [174](#)
 - Ipopt::IpoptData, [180](#)
 - Ipopt::IpoptNLP, [186](#)
- InitializeConverter
 - Ipopt::TripletToCSRConverter, [418](#)
- InitializeDataStructures
 - Ipopt::InexactData, [143](#)
 - Ipopt::IpoptAdditionalData, [163](#)
- InitializeImpl
 - Ipopt::AlgorithmStrategyObject, [24](#)
 - Ipopt::CGPerturbationHandler, [55](#)
 - Ipopt::InexactNormalTerminationTester, [154](#)
 - Ipopt::InexactPDSolver, [156](#)
 - Ipopt::InexactPDTerminationTester, [157](#)
 - Ipopt::IterativeSolverTerminationTester, [204](#)
 - Ipopt::Ma28TDependencyDetector, [231](#)
 - Ipopt::NLPScalingObject, [280](#)
 - Ipopt::PDPerturbationHandler, [300](#)
 - Ipopt::TDependencyDetector, [395](#)
 - Ipopt::TSymDependencyDetector, [420](#)
- InitializeSolve
 - Ipopt::InexactNormalTerminationTester, [154](#)
 - Ipopt::InexactPDTerminationTester, [157](#)
 - Ipopt::IterativeSolverTerminationTester, [204](#)
- InitializeStructure
 - Ipopt::IterativePardisoSolverInterface, [201](#)

- [Ipopt::IterativeWsmSolverInterface](#), 206
 - [Ipopt::Ma27TSolverInterface](#), 228
 - [Ipopt::Ma57TSolverInterface](#), 233
 - [Ipopt::Ma77SolverInterface](#), 237
 - [Ipopt::Ma86SolverInterface](#), 241
 - [Ipopt::Ma97SolverInterface](#), 246
 - [Ipopt::MumpsSolverInterface](#), 265
 - [Ipopt::PardisoSolverInterface](#), 294
 - [Ipopt::SparseSymLinearSolverInterface](#), 356
 - [Ipopt::WsmSolverInterface](#), 437
- [intermediate_callback](#)
 - [Ipopt::StdInterfaceTNLP](#), 367
 - [Ipopt::TNLP](#), 404
 - [Ipopt::TNLPReducer](#), 412
- [IntermediateCallback](#)
 - [Ipopt::NLP](#), 272
 - [Ipopt::NLPBoundsRemover](#), 276
 - [Ipopt::TNLPAdapter](#), 408
- [Invalidate](#)
 - [Ipopt::DependentResult](#), 96
- [InvalidateResult](#)
 - [Ipopt::CachedResults](#), 45
- [Ipopt::IterativeSolverTerminationTester](#)
 - [CONTINUE](#), 203
 - [MODIFY_HESSIAN](#), 203
 - [OTHER_SATISFIED](#), 203
 - [TEST_1_SATISFIED](#), 203
 - [TEST_2_SATISFIED](#), 203
 - [TEST_3_SATISFIED](#), 203
- [Ipopt::SparseSymLinearSolverInterface](#)
 - [CSR_Format_0_Offset](#), 356
 - [CSR_Format_1_Offset](#), 356
 - [CSR_Full_Format_0_Offset](#), 356
 - [CSR_Full_Format_1_Offset](#), 356
 - [Triplet_Format](#), 356
- [Ipopt::TNLP](#)
 - [LINEAR](#), 402
 - [NON_LINEAR](#), 402
- [Ipopt::TripletToCSRConverter](#)
 - [Full_Format](#), 418
 - [Triangular_Format](#), 418
- [Ipopt::AdaptiveMuUpdate](#), 18
 - [UpdateBarrierParameter](#), 20
- [Ipopt::AlgorithmBuilder](#), 20
 - [RegisterOptions](#), 21
- [Ipopt::AlgorithmStrategyObject](#), 21
 - [Initialize](#), 23
 - [InitializeImpl](#), 24
 - [ReducedInitialize](#), 23
- [Ipopt::AmplOptionsList](#), 25
 - [Keywords](#), 26
- [Ipopt::AmplOptionsList::AmplOption](#), 24
- [Ipopt::AmplOptionsList::PrivatInfo](#), 311
- [Ipopt::AmplSuffixHandler](#), 27
- [Ipopt::AmplTNLP](#), 27
 - [AmplTNLP](#), 30
 - [eval_f](#), 30
 - [eval_g](#), 31
 - [eval_grad_f](#), 31
 - [eval_h](#), 31
 - [eval_jac_g](#), 31
 - [get_bounds_info](#), 30
 - [get_constraints_linearity](#), 30
 - [get_discrete_info](#), 31
 - [get_nlp_info](#), 30
 - [get_scaling_parameters](#), 31
 - [get_starting_point](#), 30
 - [set_active_objective](#), 31
 - [write_solution_file](#), 31
- [Ipopt::AugRestoSystemSolver](#), 32
 - [AugRestoSystemSolver](#), 33
 - [IncreaseQuality](#), 33
 - [ProvidesInertia](#), 33
- [Ipopt::AugSystemSolver](#), 34
 - [AugSystemSolver](#), 35
 - [IncreaseQuality](#), 36
 - [MultiSolve](#), 35
 - [NumberOfNegEvals](#), 36
 - [ProvidesInertia](#), 36
 - [Solve](#), 35
- [Ipopt::BacktrackingLSAcceptor](#), 39
 - [BacktrackingLSAcceptor](#), 40
 - [CalculateAlphaMin](#), 41
 - [CheckAcceptabilityOfTrialPoint](#), 41
 - [ComputeAlphaForY](#), 43
 - [DoFallback](#), 42
 - [InitThisLineSearch](#), 41
 - [NeverRestorationPhase](#), 42
 - [PrepareRestoPhaseStart](#), 41
 - [Reset](#), 41
 - [RestoredIterate](#), 42
 - [StartWatchDog](#), 42
 - [StopWatchDog](#), 42
 - [TryCorrector](#), 42
 - [TrySecondOrderCorrection](#), 41
 - [UpdateForNextIteration](#), 42
- [Ipopt::BacktrackingLineSearch](#), 36
 - [ActivateFallbackMechanism](#), 39
 - [BacktrackingLineSearch](#), 38
 - [FindAcceptableTrialPoint](#), 38
 - [Reset](#), 38
 - [SetRigorousLineSearch](#), 38
- [Ipopt::CGPenaltyCq](#), 45
 - [curr_cg_pert_fact](#), 47
 - [Initialize](#), 47
- [Ipopt::CGPenaltyData](#), 47
 - [AcceptTrialPoint](#), 49
 - [Initialize](#), 49

- set_delta_cgpen, 49
- Ipopt::CGPenaltyLSAcceptor, 49
 - CGPenaltyLSAcceptor, 51
 - CalculateAlphaMin, 52
 - CheckAcceptabilityOfTrialPoint, 52
 - DoFallback, 53
 - InitThisLineSearch, 51
 - PrepareRestoPhaseStart, 52
 - Reset, 51
 - RestoredIterate, 53
 - StartWatchDog, 53
 - StopWatchDog, 53
 - TryCorrector, 52
 - TrySecondOrderCorrection, 52
 - UpdateForNextIteration, 52
- Ipopt::CGPerturbationHandler, 53
 - ConsiderNewSystem, 55
 - InitializeImpl, 55
 - PerturbForSingularity, 55
 - PerturbForWrongInertia, 55
- Ipopt::CGSearchDirCalculator, 55
 - ComputeSearchDirection, 57
- Ipopt::CachedResults
 - CachedResults, 45
 - InvalidateResult, 45
- Ipopt::CachedResults < T >, 43
- Ipopt::CompoundMatrix, 57
 - AddMSInvZImpl, 60
 - CompoundMatrix, 59
 - ComputeColAMaxImpl, 60
 - ComputeRowAMaxImpl, 60
 - GetCompNonConst, 59
 - IsValidNumbersImpl, 60
 - MultVectorImpl, 59
 - NComps_Cols, 59
 - NComps_Rows, 59
 - PrintImpl, 60
 - SetComp, 59
 - SinvBlrmZMTdBrlImpl, 60
 - TransMultVectorImpl, 60
- Ipopt::CompoundMatrixSpace, 61
 - GetBlockCols, 62
 - GetBlockRows, 62
 - MakeNewCompoundMatrix, 62
 - SetBlockCols, 62
 - SetBlockRows, 62
 - SetCompSpace, 62
- Ipopt::CompoundSymMatrix, 63
 - CompoundSymMatrix, 64
 - ComputeRowAMaxImpl, 65
 - GetComp, 64
 - GetCompNonConst, 64
 - IsValidNumbersImpl, 65
 - MakeNewCompoundSymMatrix, 65
 - MultVectorImpl, 65
 - PrintImpl, 65
 - SetComp, 64
- Ipopt::CompoundSymMatrixSpace, 65
 - MakeNewCompoundSymMatrix, 67
 - SetCompSpace, 67
- Ipopt::CompoundVector, 67
 - AddScalarImpl, 71
 - AddTwoVectorsImpl, 71
 - AddVectorQuotientImpl, 71
 - CompoundVector, 70
 - CopyImpl, 70
 - ElementWiseDivideImpl, 71
 - ElementWiseMultiplyImpl, 71
 - FracToBoundImpl, 71
 - GetCompNonConst, 70
 - IsValidNumbersImpl, 71
 - SetImpl, 71
- Ipopt::CompoundVectorSpace, 72
 - CompoundVectorSpace, 73
 - MakeNewCompoundVector, 73
 - SetCompSpace, 73
- Ipopt::ConvergenceCheck, 73
 - CheckConvergence, 75
 - CurrentIsAcceptable, 75
- Ipopt::DefaultIterateInitializer, 75
 - DefaultIterateInitializer, 77
 - least_square_mults, 77
 - push_variables, 77
 - SetInitialIterates, 77
- Ipopt::DenseGenMatrix, 78
 - AddMatrixProduct, 80
 - CholeskyBackSolveMatrix, 81
 - CholeskySolveMatrix, 81
 - CholeskySolveVector, 81
 - ComputeCholeskyFactor, 81
 - ComputeColAMaxImpl, 82
 - ComputeEigenVectors, 81
 - ComputeLUFactorInPlace, 81
 - ComputeRowAMaxImpl, 82
 - FillIdentity, 80
 - IsValidNumbersImpl, 82
 - HighRankUpdateTranspose, 80
 - LUSolveMatrix, 81
 - LUSolveVector, 81
 - MultVectorImpl, 81
 - PrintImpl, 82
 - ScaleColumns, 80
 - TransMultVectorImpl, 81
 - Values, 80
- Ipopt::DenseGenMatrixSpace, 82
 - DenseGenMatrixSpace, 83
 - MakeNewDenseGenMatrix, 84
- Ipopt::DenseSymMatrix, 84

- AddMatrix, 86
- ComputeRowAMaxImpl, 87
- FillIdentity, 86
- IsValidNumbersImpl, 86
- HighRankUpdate, 86
- HighRankUpdateTranspose, 86
- MultVectorImpl, 86
- PrintImpl, 87
- SpecialAddForLSMR1, 86
- Values, 86
- Ipopt::DenseSymMatrixSpace, 87
 - DenseSymMatrixSpace, 88
 - MakeNewDenseSymMatrix, 88
- Ipopt::DenseVector, 88
 - AddScalarImpl, 92
 - AddTwoVectorsImpl, 92
 - AddVectorQuotientImpl, 93
 - CopyFromPos, 92
 - CopyImpl, 92
 - CopyToPos, 92
 - ElementWiseDivideImpl, 92
 - ElementWiseMultiplyImpl, 92
 - ExpandedValues, 92
 - FracToBoundImpl, 93
 - SetImpl, 92
 - SetValues, 91
 - Values, 91
- Ipopt::DenseVectorSpace, 93
 - MakeNewDenseVector, 95
- Ipopt::DependentResult
 - ~DependentResult, 96
 - DebugPrint, 97
 - DependentResult, 96
 - GetResult, 96
 - Invalidate, 96
 - IsStale, 96
 - RecieveNotification, 97
- Ipopt::DependentResult< T >, 95
- Ipopt::DiagMatrix, 97
 - ComputeRowAMaxImpl, 99
 - DiagMatrix, 99
 - GetDiag, 99
 - IsValidNumbersImpl, 99
 - MultVectorImpl, 99
 - PrintImpl, 100
 - SetDiag, 99
- Ipopt::DiagMatrixSpace, 100
 - DiagMatrixSpace, 101
 - MakeNewDiagMatrix, 101
- Ipopt::EqMultiplierCalculator, 101
 - CalculateMultipliers, 103
 - EqMultiplierCalculator, 103
- Ipopt::EquilibrationScaling, 103
 - DetermineScalingParametersImpl, 104
 - RegisterOptions, 104
- Ipopt::ExactHessianUpdater, 105
- Ipopt::ExpandedMultiVectorMatrix, 106
 - ComputeColAMaxImpl, 108
 - ComputeRowAMaxImpl, 108
 - GetExpansionMatrix, 107
 - IsValidNumbersImpl, 108
 - MultVectorImpl, 107
 - PrintImpl, 108
 - SetVector, 107
 - TransMultVectorImpl, 108
- Ipopt::ExpandedMultiVectorMatrixSpace, 108
 - MakeNewExpandedMultiVectorMatrix, 109
- Ipopt::ExpansionMatrix, 110
 - AddMSinvZImpl, 112
 - CompressedPosIndices, 111
 - ComputeColAMaxImpl, 112
 - ComputeRowAMaxImpl, 112
 - ExpandedPosIndices, 111
 - MultVectorImpl, 111
 - PrintImpl, 112
 - SinvBlrmZMTdBImpl, 112
 - TransMultVectorImpl, 112
- Ipopt::ExpansionMatrixSpace, 113
 - CompressedPosIndices, 114
 - ExpandedPosIndices, 114
 - ExpansionMatrixSpace, 114
 - MakeNewExpansionMatrix, 114
- Ipopt::FileJournal, 114
 - ~FileJournal, 116
 - FileJournal, 116
 - FlushBufferImpl, 116
 - Open, 116
- Ipopt::Filter, 116
 - Acceptable, 117
 - AddEntry, 117
- Ipopt::FilterEntry, 117
 - Acceptable, 118
 - Dominated, 118
- Ipopt::FilterLSAcceptor, 118
 - CalculateAlphaMin, 121
 - CheckAcceptabilityOfTrialPoint, 121
 - FilterLSAcceptor, 120
 - InitThisLineSearch, 120
 - PrepareRestoPhaseStart, 121
 - Reset, 120
 - StartWatchDog, 121
 - StopWatchDog, 122
 - TryCorrector, 121
 - TrySecondOrderCorrection, 121
 - UpdateForNextIteration, 121
- Ipopt::GenAugSystemSolver, 122
 - IncreaseQuality, 123
 - NumberOfNegEvals, 123

- ProvidesInertia, 123
- Ipopt::GenKKTSolverInterface, 124
 - IncreaseQuality, 126
 - MultiSolve, 125
 - NumberOfNegEvals, 126
 - ProvidesInertia, 126
- Ipopt::GenTMatrix, 126
 - ComputeColAMaxImpl, 129
 - ComputeRowAMaxImpl, 129
 - HasValidNumbersImpl, 129
 - MultVectorImpl, 128
 - PrintImpl, 129
 - SetValues, 128
 - TransMultVectorImpl, 129
 - Values, 128
- Ipopt::GenTMatrixSpace, 129
 - GenTMatrixSpace, 131
 - MakeNewGenTMatrix, 131
- Ipopt::GradientScaling, 131
 - DetermineScalingParametersImpl, 132
 - RegisterOptions, 132
- Ipopt::HessianUpdater, 133
- Ipopt::IdentityMatrix, 134
 - AddMSinvZImpl, 136
 - ComputeRowAMaxImpl, 136
 - Dim, 135
 - GetFactor, 135
 - HasValidNumbersImpl, 136
 - MultVectorImpl, 135
 - PrintImpl, 136
 - SetFactor, 135
- Ipopt::IdentityMatrixSpace, 136
 - IdentityMatrixSpace, 137
 - MakeNewIdentityMatrix, 138
- Ipopt::InexactAlgorithmBuilder, 138
 - RegisterOptions, 139
- Ipopt::InexactCq, 139
 - curr_Wu_s, 141
 - curr_Wu_x, 141
 - curr_jac_cdT_times_curr_cdminuss, 141
 - curr_uWu, 141
 - Initialize, 141
- Ipopt::InexactData, 141
 - AcceptTrialPoint, 143
 - Initialize, 143
 - InitializeDataStructures, 143
- Ipopt::InexactDoglegNormalStep, 144
 - ComputeNormalStep, 145
- Ipopt::InexactLSAcceptor, 145
 - CalculateAlphaMin, 148
 - CheckAcceptabilityOfTrialPoint, 148
 - InexactLSAcceptor, 147
 - InitThisLineSearch, 148
 - PrepareRestoPhaseStart, 148
 - Reset, 148
 - StartWatchDog, 149
 - StopWatchDog, 149
 - TryCorrector, 148
 - TrySecondOrderCorrection, 148
 - UpdateForNextIteration, 148
- Ipopt::InexactNewtonNormalStep, 149
 - ComputeNewtonNormalStep, 150
- Ipopt::InexactNormalStepCalculator, 150
 - ComputeNormalStep, 152
- Ipopt::InexactNormalTerminationTester, 152
 - Clear, 154
 - InitializeImpl, 154
 - InitializeSolve, 154
 - Set_c_Avc_norm_cauchy, 154
 - TestTermination, 154
- Ipopt::InexactPDSolver, 155
 - InitializeImpl, 156
- Ipopt::InexactPDTerminationTester, 156
 - Clear, 158
 - InitializeImpl, 157
 - InitializeSolve, 157
 - TestTermination, 157
- Ipopt::InexactSearchDirCalculator, 158
 - ComputeSearchDirection, 159
- Ipopt::InexactTSymScalingMethod, 159
 - ComputeSymTScalingFactors, 161
- Ipopt::IpoptAdditionalCq, 161
 - Initialize, 162
- Ipopt::IpoptAdditionalData, 162
 - AcceptTrialPoint, 163
 - Initialize, 163
 - InitializeDataStructures, 163
- Ipopt::IpoptAlgorithm, 163
 - IpoptAlgorithm, 165
 - Optimize, 165
- Ipopt::IpoptApplication, 165
 - clone, 167
 - Initialize, 167, 168
 - OpenOutputFile, 168
 - PrintCopyrightMessage, 168
 - ReOptimizeNLP, 168
 - ReOptimizeTNLP, 168
 - RegisterAllIpoptOptions, 169
 - RethrowNonIpoptException, 168
 - Statistics, 168
- Ipopt::IpoptCalculatedQuantities, 169
 - CalcCentralityMeasure, 175
 - curr_barrier_error, 175
 - curr_constraint_violation, 174
 - curr_gradBarrTDelta, 176
 - curr_nlp_constraint_violation, 175
 - curr_nlp_error, 175
 - curr_primal_dual_system_error, 175

- curr_primal_infeasibility, 175
- GetIpoptNLP, 176
- Initialize, 174
- RegisterOptions, 176
- SetAddCq, 174
- trial_constraint_violation, 174
- trial_primal_dual_system_error, 176
- uncached_slack_frac_to_the_bound, 176
- unscaled_curr_complementarity, 175
- unscaled_curr_nlp_constraint_violation, 175
- unscaled_curr_nlp_error, 175
- unscaled_trial_nlp_constraint_violation, 175
- Ipopt::IpoptData, 176
 - AcceptTrialPoint, 181
 - cpu_time_start, 181
 - delta, 180
 - HaveAffineDeltas, 181
 - HaveDeltas, 180
 - Initialize, 180
 - set_delta, 180
 - Set_info_skip_output, 182
 - Set_tol, 181
 - set_trial, 180
 - SetHaveAffineDeltas, 181
 - SetHaveDeltas, 181
 - tol, 181
 - trial, 180
- Ipopt::IpoptException, 182
- Ipopt::IpoptNLP, 183
 - AdjustVariableBounds, 186
 - f, 186
 - GetSpaces, 186
 - Initialize, 186
 - objective_depends_on_mu, 186
 - uninitialized_h, 186
- Ipopt::IterateInitializer, 187
 - SetInitialIterates, 187
- Ipopt::IteratesVector, 188
 - create_new_s_copy, 192
 - create_new_v_L_copy, 194
 - create_new_v_U_copy, 195
 - create_new_x_copy, 191
 - create_new_y_c_copy, 192
 - create_new_y_d_copy, 193
 - create_new_z_L_copy, 193
 - create_new_z_U_copy, 194
 - GetTagSum, 195
 - MakeNewContainer, 191
 - MakeNewIteratesVector, 191
 - s_NonConst, 192
 - Set_bound_mult, 195
 - Set_eq_mult, 195
 - Set_primal, 195
 - Set_s, 192
 - Set_s_NonConst, 192
 - Set_v_L, 194
 - Set_v_L_NonConst, 194
 - Set_v_U, 195
 - Set_v_U_NonConst, 195
 - Set_x, 192
 - Set_x_NonConst, 192
 - Set_y_c, 192
 - Set_y_c_NonConst, 193
 - Set_y_d, 193
 - Set_y_d_NonConst, 193
 - Set_z_L, 193
 - Set_z_L_NonConst, 194
 - Set_z_U, 194
 - Set_z_U_NonConst, 194
 - v_L_NonConst, 194
 - v_U_NonConst, 195
 - x, 191
 - x_NonConst, 191
 - y_c_NonConst, 192
 - y_d_NonConst, 193
 - z_L_NonConst, 193
 - z_U_NonConst, 194
- Ipopt::IteratesVectorSpace, 196
 - IteratesVectorSpace, 197
 - MakeNew, 197
 - MakeNewIteratesVector, 197
- Ipopt::IterationOutput, 198
 - WriteOutput, 199
- Ipopt::IterativePardisoSolverInterface, 199
 - GetValuesArrayPtr, 201
 - InitializeStructure, 201
 - MultiSolve, 201
 - ProvidesInertia, 201
- Ipopt::IterativeSolverTerminationTester, 202
 - Clear, 204
 - ETerminationTest, 203
 - InitializeImpl, 204
 - InitializeSolve, 204
 - TestTermination, 204
- Ipopt::IterativeWsmvSolverInterface, 204
 - GetValuesArrayPtr, 206
 - InitializeStructure, 206
 - MultiSolve, 206
 - ProvidesInertia, 206
- Ipopt::Journal, 207
 - ~Journal, 208
 - FlushBuffer, 208
 - FlushBufferImpl, 208
 - Journal, 208
 - SetAllPrintLevels, 208
 - SetPrintLevel, 208
- Ipopt::Journalist, 209
 - ~Journalist, 210

- AddFileJournal, [211](#)
- AddJournal, [211](#)
- DeleteAllJournals, [211](#)
- FlushBuffer, [211](#)
- GetJournal, [211](#)
- Journalist, [210](#)
- PrintStringOverLines, [210](#)
- ProduceOutput, [211](#)
- VPrintf, [211](#)
- VPrintfIndented, [211](#)
- Ipopt::LeastSquareMultipliers, [212](#)
 - CalculateMultipliers, [213](#)
 - LeastSquareMultipliers, [213](#)
- Ipopt::LimMemQuasiNewtonUpdater, [213](#)
- Ipopt::LineSearch, [215](#)
 - ActivateFallbackMechanism, [216](#)
 - FindAcceptableTrialPoint, [216](#)
 - Reset, [216](#)
 - SetRigorousLineSearch, [216](#)
- Ipopt::LoqoMuOracle, [217](#)
- Ipopt::LowRankAugSystemSolver, [218](#)
 - IncreaseQuality, [219](#)
 - NumberOfNegEVals, [219](#)
 - ProvidesInertia, [219](#)
- Ipopt::LowRankSSAugSystemSolver, [220](#)
 - IncreaseQuality, [221](#)
 - LowRankSSAugSystemSolver, [221](#)
 - NumberOfNegEVals, [221](#)
 - ProvidesInertia, [221](#)
- Ipopt::LowRankUpdateSymMatrix, [222](#)
 - ComputeRowAMaxImpl, [225](#)
 - GetDiag, [224](#)
 - GetU, [224](#)
 - GetV, [224](#)
 - HasValidNumbersImpl, [225](#)
 - LowRankUpdateSymMatrix, [223](#)
 - LowRankVectorSpace, [224](#)
 - MultVectorImpl, [224](#)
 - P_LowRank, [224](#)
 - PrintImpl, [225](#)
 - ReducedDiag, [224](#)
 - SetDiag, [224](#)
 - SetU, [224](#)
 - SetV, [224](#)
- Ipopt::LowRankUpdateSymMatrixSpace, [225](#)
 - LowRankUpdateSymMatrixSpace, [226](#)
 - MakeNewLowRankUpdateSymMatrix, [227](#)
- Ipopt::Ma27TSolverInterface, [227](#)
 - GetValuesArrayPtr, [229](#)
 - IncreaseQuality, [229](#)
 - InitializeStructure, [228](#)
 - MultiSolve, [229](#)
 - NumberOfNegEVals, [229](#)
 - ProvidesInertia, [229](#)
- Ipopt::Ma28TDependencyDetector, [229](#)
 - DetermineDependentRows, [231](#)
 - InitializeImpl, [231](#)
- Ipopt::Ma57TSolverInterface, [231](#)
 - GetValuesArrayPtr, [233](#)
 - IncreaseQuality, [234](#)
 - InitializeStructure, [233](#)
 - MultiSolve, [233](#)
 - NumberOfNegEVals, [233](#)
 - ProvidesInertia, [234](#)
- Ipopt::Ma77SolverInterface, [234](#)
 - DetermineDependentRows, [238](#)
 - GetValuesArrayPtr, [237](#)
 - IncreaseQuality, [238](#)
 - InitializeStructure, [237](#)
 - MultiSolve, [237](#)
 - NumberOfNegEVals, [237](#)
 - ProvidesDegeneracyDetection, [238](#)
 - ProvidesInertia, [238](#)
- Ipopt::Ma86SolverInterface, [239](#)
 - DetermineDependentRows, [242](#)
 - GetValuesArrayPtr, [241](#)
 - IncreaseQuality, [242](#)
 - InitializeStructure, [241](#)
 - MultiSolve, [241](#)
 - NumberOfNegEVals, [242](#)
 - ProvidesDegeneracyDetection, [242](#)
 - ProvidesInertia, [242](#)
- Ipopt::Ma97SolverInterface, [243](#)
 - DetermineDependentRows, [247](#)
 - GetValuesArrayPtr, [246](#)
 - IncreaseQuality, [247](#)
 - InitializeStructure, [246](#)
 - MultiSolve, [246](#)
 - NumberOfNegEVals, [246](#)
 - ProvidesDegeneracyDetection, [247](#)
 - ProvidesInertia, [247](#)
- Ipopt::Matrix, [247](#)
 - AddMSinvZ, [250](#)
 - AddMSinvZImpl, [251](#)
 - ComputeColAMax, [250](#)
 - ComputeColAMaxImpl, [252](#)
 - ComputeRowAMax, [250](#)
 - ComputeRowAMaxImpl, [251](#)
 - HasValidNumbers, [250](#)
 - HasValidNumbersImpl, [251](#)
 - Matrix, [250](#)
 - MultVector, [250](#)
 - MultVectorImpl, [251](#)
 - Print, [250](#)
 - PrintImpl, [252](#)
 - SinvBlrmZMTdBr, [250](#)
 - SinvBlrmZMTdBrImpl, [251](#)
 - TransMultVector, [250](#)

- TransMultVectorImpl, 251
- Ipopt::MatrixSpace, 252
 - NCols, 254
 - NRows, 254
- Ipopt::Mc19TSymScalingMethod, 254
 - ComputeSymTScalingFactors, 255
- Ipopt::MinC_1NrmRestorationPhase, 256
 - MinC_1NrmRestorationPhase, 257
 - PerformRestoration, 257
- Ipopt::MonotoneMuUpdate, 257
 - UpdateBarrierParameter, 259
- Ipopt::MuOracle, 266
 - CalculateMu, 267
- Ipopt::MuUpdate, 268
 - UpdateBarrierParameter, 269
- Ipopt::MultiVectorMatrix, 259
 - AddRightMultMatrix, 261
 - ComputeColAMaxImpl, 262
 - ComputeRowAMaxImpl, 262
 - FillWithNewVectors, 261
 - GetVectorNonConst, 261
 - HasValidNumbersImpl, 262
 - LRMultVector, 261
 - MultVectorImpl, 261
 - PrintImpl, 262
 - ScaleColumns, 261
 - ScaleRows, 261
 - SetVector, 261
 - TransMultVectorImpl, 261
- Ipopt::MultiVectorMatrixSpace, 262
 - MakeNewMultiVectorMatrix, 263
- Ipopt::MumpsSolverInterface, 264
 - DetermineDependentRows, 266
 - GetValuesArrayPtr, 265
 - IncreaseQuality, 266
 - InitializeStructure, 265
 - MultiSolve, 265
 - NumberOfNegEvals, 266
 - ProvidesDegeneracyDetection, 266
 - ProvidesInertia, 266
- Ipopt::NLP, 269
 - FinalizeSolution, 272
 - GetQuasiNewtonApproximationSpaces, 273
 - GetScalingParameters, 273
 - GetSpaces, 271
 - GetStartingPoint, 272
 - GetWarmStartIterate, 272
 - IntermediateCallBack, 272
- Ipopt::NLPBoundsRemover, 273
 - FinalizeSolution, 276
 - GetQuasiNewtonApproximationSpaces, 277
 - GetScalingParameters, 277
 - GetSpaces, 276
 - GetStartingPoint, 276
 - GetWarmStartIterate, 276
 - IntermediateCallBack, 276
 - NLPBoundsRemover, 275
- Ipopt::NLPScalingObject, 277
 - apply_grad_obj_scaling_NonConst, 280
 - apply_jac_c_scaling, 280
 - apply_obj_scaling, 280
 - apply_vector_scaling_x_LU_NonConst, 280
 - have_c_scaling, 280
 - have_d_scaling, 280
 - have_x_scaling, 280
 - InitializeImpl, 280
- Ipopt::NoNLPScalingObject, 281
- Ipopt::Observer, 282
 - RequestAttach, 283
 - RequestDetach, 283
- Ipopt::OptimalityErrorConvergenceCheck, 284
 - acceptable_iter_, 286
 - acceptable_obj_change_tol_, 286
- Ipopt::OptionsList, 286
 - PrintUserOptions, 288
 - ReadFromStream, 288
- Ipopt::OrigIpoptNLP, 288
 - AdjustVariableBounds, 291
 - f, 291
 - uninitialized_h, 291
- Ipopt::OrigIterationOutput, 291
 - WriteOutput, 293
- Ipopt::PDFullSpaceSolver, 295
- Ipopt::PDPerturbationHandler, 297
 - ConsiderNewSystem, 300
 - degen_iters_, 301
 - degen_iters_max_, 302
 - delta_cd_exp_, 302
 - delta_cd_val_, 302
 - delta_xs_dec_fact_, 302
 - delta_xs_first_inc_fact_, 301
 - delta_xs_inc_fact_, 301
 - delta_xs_init_, 302
 - delta_xs_max_, 301
 - delta_xs_min_, 301
 - finalize_test, 301
 - get_deltas_for_wrong_inertia, 301
 - get_deltas_for_wrong_inertia_called_, 301
 - hess_degenerate_, 301
 - InitializeImpl, 300
 - jac_degenerate_, 301
 - PerturbForSingularity, 300
 - PerturbForWrongInertia, 300
 - reset_last_, 302
- Ipopt::PDSearchDirCalculator, 302
 - ComputeSearchDirection, 304
- Ipopt::PDSysSystemSolver, 304
 - Solve, 306

- Ipopt::PardisoSolverInterface, 293
 - GetValuesArrayPtr, 294
 - InitializeStructure, 294
 - MultiSolve, 295
 - ProvidesInertia, 295
- Ipopt::PenaltyLSAcceptor, 306
 - CalculateAlphaMin, 308
 - CheckAcceptabilityOfTrialPoint, 308
 - InitThisLineSearch, 308
 - PenaltyLSAcceptor, 308
 - PrepareRestoPhaseStart, 308
 - Reset, 308
 - StartWatchDog, 309
 - StopWatchDog, 309
 - TryCorrector, 309
 - TrySecondOrderCorrection, 308
 - UpdateForNextIteration, 309
- Ipopt::PiecewisePenEntry, 310
- Ipopt::PiecewisePenalty, 309
 - Acceptable, 310
- Ipopt::PointPerturber, 310
- Ipopt::ProbingMuOracle, 312
- Ipopt::QualityFunctionMuOracle, 313
- Ipopt::ReferencedObject, 314
- Ipopt::Referencer, 317
- Ipopt::RegisteredOption, 318
 - MapStringSettingToEnum, 321
 - Name, 321
- Ipopt::RegisteredOption::string_entry, 369
- Ipopt::RegisteredOptions, 321
 - OutputOptionDocumentation, 323
 - RegisteredOptions, 323
 - SetRegisteringCategory, 323
- Ipopt::RestoConvergenceCheck, 324
- Ipopt::RestoFilterConvergenceCheck, 325
 - SetOrigLSAcceptor, 327
- Ipopt::RestoIpoptNLP, 327
 - AdjustVariableBounds, 331
 - DR_x, 331
 - objective_depends_on_mu, 330
 - RegisterOptions, 331
 - uninitialized_h, 330
- Ipopt::RestoIterateInitializer, 331
 - RestoIterateInitializer, 333
 - SetInitialIterates, 333
- Ipopt::RestoIterationOutput, 333
 - RestoIterationOutput, 335
 - WriteOutput, 335
- Ipopt::RestoPenaltyConvergenceCheck, 335
 - SetOrigLSAcceptor, 337
- Ipopt::RestoRestorationPhase, 339
 - PerformRestoration, 340
 - RestoRestorationPhase, 340
- Ipopt::RestorationPhase, 337
 - PerformRestoration, 339
- Ipopt::ScaledMatrix, 340
 - AddMSinvZImpl, 343
 - ComputeColAMaxImpl, 343
 - ComputeRowAMaxImpl, 343
 - HasValidNumbersImpl, 342
 - MultVectorImpl, 342
 - PrintImpl, 343
 - SinvBlrmZMTdBrlImpl, 343
 - TransMultVectorImpl, 342
- Ipopt::ScaledMatrixSpace, 343
 - MakeNewScaledMatrix, 345
- Ipopt::SearchDirectionCalculator, 345
 - ComputeSearchDirection, 346
- Ipopt::SlackBasedTSymScalingMethod, 346
 - ComputeSymTScalingFactors, 347
- Ipopt::SmartPtr
 - ~SmartPtr, 350
 - GetRawPtr, 351
 - IsNull, 351
 - IsValid, 351
 - operator*, 351
 - operator->, 350
 - operator==, 351
- Ipopt::SmartPtr< T >, 347
- Ipopt::SolveStatistics, 352
 - IterationCount, 353
 - NumberOfEvaluations, 353
 - SolveStatistics, 353
 - TotalCPUTime, 353
 - TotalCpuTime, 353
 - TotalSysTime, 353
 - TotalWallclockTime, 353
- Ipopt::SparseSymLinearSolverInterface, 354
 - DetermineDependentRows, 358
 - EMatrixFormat, 356
 - GetValuesArrayPtr, 357
 - IncreaseQuality, 357
 - InitializeStructure, 356
 - MultiSolve, 357
 - NumberOfNegEvals, 357
 - ProvidesDegeneracyDetection, 358
 - ProvidesInertia, 358
- Ipopt::StandardScalingBase, 358
 - apply_jac_c_scaling, 360
 - apply_obj_scaling, 360
 - DetermineScalingParametersImpl, 361
 - have_c_scaling, 361
 - have_d_scaling, 361
 - have_x_scaling, 361
- Ipopt::StdAugSystemSolver, 361
 - IncreaseQuality, 363
 - NumberOfNegEvals, 363
 - ProvidesInertia, 363

- [Ipopt::StdInterfaceTNLP](#), [363](#)
 - [eval_f](#), [366](#)
 - [eval_g](#), [366](#)
 - [eval_grad_f](#), [366](#)
 - [eval_h](#), [367](#)
 - [eval_jac_g](#), [366](#)
 - [get_bounds_info](#), [366](#)
 - [get_nlp_info](#), [365](#)
 - [get_scaling_parameters](#), [366](#)
 - [get_starting_point](#), [366](#)
 - [intermediate_callback](#), [367](#)
 - [StdInterfaceTNLP](#), [365](#)
- [Ipopt::StreamJournal](#), [367](#)
 - [~StreamJournal](#), [368](#)
 - [FlushBufferImpl](#), [368](#)
 - [StreamJournal](#), [368](#)
- [Ipopt::Subject](#), [369](#)
 - [AttachObserver](#), [370](#)
 - [DetachObserver](#), [370](#)
- [Ipopt::SumMatrix](#), [370](#)
 - [ComputeColAMaxImpl](#), [373](#)
 - [ComputeRowAMaxImpl](#), [372](#)
 - [GetTerm](#), [372](#)
 - [IsValidNumbersImpl](#), [372](#)
 - [MultVectorImpl](#), [372](#)
 - [PrintImpl](#), [373](#)
 - [SetTerm](#), [372](#)
 - [TransMultVectorImpl](#), [372](#)
- [Ipopt::SumMatrixSpace](#), [373](#)
 - [MakeNewSumMatrix](#), [374](#)
 - [NTerms](#), [374](#)
 - [SetTermSpace](#), [374](#)
- [Ipopt::SumSymMatrix](#), [374](#)
 - [ComputeRowAMaxImpl](#), [376](#)
 - [GetTerm](#), [376](#)
 - [IsValidNumbersImpl](#), [376](#)
 - [MultVectorImpl](#), [376](#)
 - [PrintImpl](#), [376](#)
 - [SetTerm](#), [376](#)
- [Ipopt::SumSymMatrixSpace](#), [377](#)
 - [MakeNewSumSymMatrix](#), [378](#)
 - [NTerms](#), [378](#)
 - [SetTermSpace](#), [378](#)
 - [SumSymMatrixSpace](#), [378](#)
- [Ipopt::SymLinearSolver](#), [378](#)
 - [IncreaseQuality](#), [380](#)
 - [MultiSolve](#), [380](#)
 - [NumberOfNegEvals](#), [380](#)
 - [ProvidesInertia](#), [380](#)
 - [Solve](#), [380](#)
- [Ipopt::SymMatrix](#), [381](#)
 - [TransMultVectorImpl](#), [382](#)
- [Ipopt::SymMatrixSpace](#), [382](#)
 - [MakeNewSymMatrix](#), [383](#)
- [Ipopt::SymScaledMatrix](#), [384](#)
 - [ComputeRowAMaxImpl](#), [385](#)
 - [IsValidNumbersImpl](#), [385](#)
 - [MultVectorImpl](#), [385](#)
 - [PrintImpl](#), [386](#)
- [Ipopt::SymScaledMatrixSpace](#), [386](#)
 - [MakeNewSymScaledMatrix](#), [387](#)
- [Ipopt::SymTMatrix](#), [387](#)
 - [ComputeRowAMaxImpl](#), [390](#)
 - [IsValidNumbersImpl](#), [390](#)
 - [Irows](#), [389](#)
 - [Jcols](#), [390](#)
 - [MultVectorImpl](#), [390](#)
 - [PrintImpl](#), [390](#)
 - [SetValues](#), [389](#)
 - [Values](#), [390](#)
- [Ipopt::SymTMatrixSpace](#), [391](#)
 - [MakeNewSymTMatrix](#), [392](#)
 - [SymTMatrixSpace](#), [392](#)
- [Ipopt::TDependencyDetector](#), [394](#)
 - [DetermineDependentRows](#), [396](#)
 - [InitializeImpl](#), [395](#)
- [Ipopt::TNLP](#), [399](#)
 - [eval_grad_f](#), [403](#)
 - [eval_h](#), [404](#)
 - [eval_jac_g](#), [403](#)
 - [finalize_metadata](#), [404](#)
 - [get_bounds_info](#), [402](#)
 - [get_constraints_linearity](#), [403](#)
 - [get_scaling_parameters](#), [402](#)
 - [get_starting_point](#), [403](#)
 - [get_variables_linearity](#), [403](#)
 - [get_warm_start_iterate](#), [403](#)
 - [IndexStyleEnum](#), [402](#)
 - [intermediate_callback](#), [404](#)
 - [LinearityType](#), [402](#)
- [Ipopt::TNLPAdapter](#), [404](#)
 - [DerivativeTestEnum](#), [407](#)
 - [FinalizeSolution](#), [408](#)
 - [GetQuasiNewtonApproximationSpaces](#), [408](#)
 - [GetScalingParameters](#), [407](#)
 - [GetSpaces](#), [407](#)
 - [GetStartingPoint](#), [407](#)
 - [GetWarmStartIterate](#), [407](#)
 - [IntermediateCallBack](#), [408](#)
 - [tnlp](#), [408](#)
- [Ipopt::TNLPReducer](#), [408](#)
 - [eval_grad_f](#), [411](#)
 - [eval_h](#), [412](#)
 - [eval_jac_g](#), [411](#)
 - [get_bounds_info](#), [410](#)
 - [get_constraints_linearity](#), [411](#)
 - [get_scaling_parameters](#), [410](#)
 - [get_starting_point](#), [411](#)

- get_variables_linearity, 411
- get_warm_start_iterate, 411
- intermediate_callback, 412
- TNLPReducer, 410
- Ipopt::TSymDependencyDetector, 419
 - DetermineDependentRows, 420
 - InitializeImpl, 420
- Ipopt::TSymLinearSolver, 420
 - DetermineDependentRows, 423
 - IncreaseQuality, 423
 - MultiSolve, 422
 - NumberOfNegEvals, 422
 - ProvidesInertia, 423
 - TSymLinearSolver, 422
- Ipopt::TSymScalingMethod, 423
 - ComputeSymTScalingFactors, 424
- Ipopt::TaggedObject, 392
 - ~TaggedObject, 394
 - TaggedObject, 394
- Ipopt::TimedTask, 396
 - End, 397
 - EndIfStarted, 397
 - Reset, 397
 - Start, 397
 - TimedTask, 397
 - TotalCpuTime, 397
 - TotalSysTime, 397
 - TotalWallclockTime, 397
- Ipopt::TimingStatistics, 398
 - ResetTimes, 399
 - TimingStatistics, 399
- Ipopt::TransposeMatrix, 412
 - ComputeColAMaxImpl, 414
 - ComputeRowAMaxImpl, 414
 - IsValidNumbersImpl, 414
 - MultVectorImpl, 414
 - PrintImpl, 414
 - TransMultVectorImpl, 414
- Ipopt::TransposeMatrixSpace, 415
 - MakeNewTransposeMatrix, 416
 - TransposeMatrixSpace, 416
- Ipopt::TripletHelper, 416
- Ipopt::TripletToCSRConverter, 417
 - ConvertValues, 418
 - ETriFull, 418
 - IA, 418
 - InitializeConverter, 418
 - JA, 418
- Ipopt::UserScaling, 424
 - DetermineScalingParametersImpl, 426
- Ipopt::Vector, 426
 - AddOneVector, 431
 - AddTwoVectors, 431
 - AddTwoVectorsImpl, 431
 - AddVectorQuotient, 431
 - Copy, 431
 - CopyImpl, 431
 - FracToBound, 431
 - FracToBoundImpl, 432
 - IsValidNumbers, 431
 - IsValidNumbersImpl, 432
 - Set, 431
 - SetImpl, 431
 - Vector, 430
- Ipopt::VectorSpace, 432
 - Dim, 433
- Ipopt::WarmStartIterateInitializer, 433
 - SetInitialIterates, 435
 - WarmStartIterateInitializer, 435
- Ipopt::WsmpSolverInterface, 435
 - DetermineDependentRows, 437
 - GetValuesArrayPtr, 437
 - InitializeStructure, 437
 - MultiSolve, 437
 - ProvidesDegeneracyDetection, 437
 - ProvidesInertia, 437
- Ipopt::ZeroMatrix, 437
 - ComputeColAMaxImpl, 439
 - ComputeRowAMaxImpl, 439
 - MultVectorImpl, 439
 - PrintImpl, 439
 - TransMultVectorImpl, 439
- Ipopt::ZeroMatrixSpace, 440
 - MakeNewZeroMatrix, 440
- Ipopt::ZeroSymMatrix, 441
 - ComputeRowAMaxImpl, 442
 - MultVectorImpl, 442
 - PrintImpl, 442
 - TransMultVectorImpl, 442
- Ipopt::ZeroSymMatrixSpace, 443
 - MakeNewZeroSymMatrix, 444
- IpoptAlgorithm
 - Ipopt::IpoptAlgorithm, 165
- Irows
 - Ipopt::SymTMatrix, 389
- IsNull
 - Ipopt::SmartPtr, 351
- IsStale
 - Ipopt::DependentResult, 96
- IsValid
 - Ipopt::SmartPtr, 351
- IteratesVectorSpace
 - Ipopt::IteratesVectorSpace, 197
- IterationCount
 - Ipopt::SolveStatistics, 353
- JA
 - Ipopt::TripletToCSRConverter, 418

- jac_degenerate_
 - Ipopt::PDPerturbationHandler, 301
- Jcols
 - Ipopt::SymTMatrix, 390
- Journal
 - Ipopt::Journal, 208
- Journalist
 - Ipopt::Journalist, 210
- Keywords
 - Ipopt::AmplOptionsList, 26
- LINEAR
 - Ipopt::TNLP, 402
- LRMultVector
 - Ipopt::MultiVectorMatrix, 261
- LUSolveMatrix
 - Ipopt::DenseGenMatrix, 81
- LUSolveVector
 - Ipopt::DenseGenMatrix, 81
- least_square_mults
 - Ipopt::DefaultIterateInitializer, 77
- LeastSquareMultipliers
 - Ipopt::LeastSquareMultipliers, 213
- LinearityType
 - Ipopt::TNLP, 402
- LowRankSSAugSystemSolver
 - Ipopt::LowRankSSAugSystemSolver, 221
- LowRankUpdateSymMatrix
 - Ipopt::LowRankUpdateSymMatrix, 223
- LowRankUpdateSymMatrixSpace
 - Ipopt::LowRankUpdateSymMatrixSpace, 226
- LowRankVectorSpace
 - Ipopt::LowRankUpdateSymMatrix, 224
- MODIFY_HESSIAN
 - Ipopt::IterativeSolverTerminationTester, 203
- ma77_control_d, 234
- ma77_info_d, 234
- ma86_control_d, 238
- ma86_info_d, 239
- ma97_control_d, 243
- ma97_info, 243
- MakeNew
 - Ipopt::IteratesVectorSpace, 197
- MakeNewCompoundMatrix
 - Ipopt::CompoundMatrixSpace, 62
- MakeNewCompoundSymMatrix
 - Ipopt::CompoundSymMatrix, 65
 - Ipopt::CompoundSymMatrixSpace, 67
- MakeNewCompoundVector
 - Ipopt::CompoundVectorSpace, 73
- MakeNewContainer
 - Ipopt::IteratesVector, 191
- MakeNewDenseGenMatrix
 - Ipopt::DenseGenMatrixSpace, 84
- MakeNewDenseSymMatrix
 - Ipopt::DenseSymMatrixSpace, 88
- MakeNewDenseVector
 - Ipopt::DenseVectorSpace, 95
- MakeNewDiagMatrix
 - Ipopt::DiagMatrixSpace, 101
- MakeNewExpandedMultiVectorMatrix
 - Ipopt::ExpandedMultiVectorMatrixSpace, 109
- MakeNewExpansionMatrix
 - Ipopt::ExpansionMatrixSpace, 114
- MakeNewGenTMatrix
 - Ipopt::GenTMatrixSpace, 131
- MakeNewIdentityMatrix
 - Ipopt::IdentityMatrixSpace, 138
- MakeNewIteratesVector
 - Ipopt::IteratesVector, 191
 - Ipopt::IteratesVectorSpace, 197
- MakeNewLowRankUpdateSymMatrix
 - Ipopt::LowRankUpdateSymMatrixSpace, 227
- MakeNewMultiVectorMatrix
 - Ipopt::MultiVectorMatrixSpace, 263
- MakeNewScaledMatrix
 - Ipopt::ScaledMatrixSpace, 345
- MakeNewSumMatrix
 - Ipopt::SumMatrixSpace, 374
- MakeNewSumSymMatrix
 - Ipopt::SumSymMatrixSpace, 378
- MakeNewSymMatrix
 - Ipopt::SymMatrixSpace, 383
- MakeNewSymScaledMatrix
 - Ipopt::SymScaledMatrixSpace, 387
- MakeNewSymTMatrix
 - Ipopt::SymTMatrixSpace, 392
- MakeNewTransposeMatrix
 - Ipopt::TransposeMatrixSpace, 416
- MakeNewZeroMatrix
 - Ipopt::ZeroMatrixSpace, 440
- MakeNewZeroSymMatrix
 - Ipopt::ZeroSymMatrixSpace, 444
- MapStringSettingToEnum
 - Ipopt::RegisteredOption, 321
- Matrix
 - Ipopt::Matrix, 250
- mc68_control, 255
- mc68_info, 255
- MinC_1NrmRestorationPhase
 - Ipopt::MinC_1NrmRestorationPhase, 257
- MultVector
 - Ipopt::Matrix, 250
- MultVectorImpl
 - Ipopt::CompoundMatrix, 59
 - Ipopt::CompoundSymMatrix, 65
 - Ipopt::DenseGenMatrix, 81

- Ipopt::DenseSymMatrix, 86
- Ipopt::DiagMatrix, 99
- Ipopt::ExpandedMultiVectorMatrix, 107
- Ipopt::ExpansionMatrix, 111
- Ipopt::GenTMatrix, 128
- Ipopt::IdentityMatrix, 135
- Ipopt::LowRankUpdateSymMatrix, 224
- Ipopt::Matrix, 251
- Ipopt::MultiVectorMatrix, 261
- Ipopt::ScaledMatrix, 342
- Ipopt::SumMatrix, 372
- Ipopt::SumSymMatrix, 376
- Ipopt::SymScaledMatrix, 385
- Ipopt::SymTMatrix, 390
- Ipopt::TransposeMatrix, 414
- Ipopt::ZeroMatrix, 439
- Ipopt::ZeroSymMatrix, 442
- MultiSolve
 - Ipopt::AugSystemSolver, 35
 - Ipopt::GenKKTsSolverInterface, 125
 - Ipopt::IterativePardisoSolverInterface, 201
 - Ipopt::IterativeWsmSolverInterface, 206
 - Ipopt::Ma27TSolverInterface, 229
 - Ipopt::Ma57TSolverInterface, 233
 - Ipopt::Ma77SolverInterface, 237
 - Ipopt::Ma86SolverInterface, 241
 - Ipopt::Ma97SolverInterface, 246
 - Ipopt::MumpsSolverInterface, 265
 - Ipopt::PardisoSolverInterface, 295
 - Ipopt::SparseSymLinearSolverInterface, 357
 - Ipopt::SymLinearSolver, 380
 - Ipopt::TSymLinearSolver, 422
 - Ipopt::WsmSolverInterface, 437
- NON_LINEAR
 - Ipopt::TNLP, 402
- NCols
 - Ipopt::MatrixSpace, 254
- NComps_Cols
 - Ipopt::CompoundMatrix, 59
- NComps_Rows
 - Ipopt::CompoundMatrix, 59
- NLPBoundsRemover
 - Ipopt::NLPBoundsRemover, 275
- NRows
 - Ipopt::MatrixSpace, 254
- NTerms
 - Ipopt::SumMatrixSpace, 374
 - Ipopt::SumSymMatrixSpace, 378
- Name
 - Ipopt::RegisteredOption, 321
- NeverRestorationPhase
 - Ipopt::BacktrackingLSAceptor, 42
- NumberOfEvaluations
 - Ipopt::SolveStatistics, 353
- NumberOfNegEvals
 - Ipopt::AugSystemSolver, 36
 - Ipopt::GenAugSystemSolver, 123
 - Ipopt::GenKKTsSolverInterface, 126
 - Ipopt::LowRankAugSystemSolver, 219
 - Ipopt::LowRankSSAugSystemSolver, 221
 - Ipopt::Ma27TSolverInterface, 229
 - Ipopt::Ma57TSolverInterface, 233
 - Ipopt::Ma77SolverInterface, 237
 - Ipopt::Ma86SolverInterface, 242
 - Ipopt::Ma97SolverInterface, 246
 - Ipopt::MumpsSolverInterface, 266
 - Ipopt::SparseSymLinearSolverInterface, 357
 - Ipopt::StdAugSystemSolver, 363
 - Ipopt::SymLinearSolver, 380
 - Ipopt::TSymLinearSolver, 422
- OTHER_SATISFIED
 - Ipopt::IterativeSolverTerminationTester, 203
- objective_depends_on_mu
 - Ipopt::IpoptNLP, 186
 - Ipopt::RestoIpoptNLP, 330
- Open
 - Ipopt::FileJournal, 116
- OpenOutputFile
 - Ipopt::IpoptApplication, 168
- operator*
 - Ipopt::SmartPtr, 351
- operator->
 - Ipopt::SmartPtr, 350
- operator==
 - Ipopt::SmartPtr, 351
- Optimize
 - Ipopt::IpoptAlgorithm, 165
- OutputOptionDocumentation
 - Ipopt::RegisteredOptions, 323
- P_LowRank
 - Ipopt::LowRankUpdateSymMatrix, 224
- PenaltyLSAceptor
 - Ipopt::PenaltyLSAceptor, 308
- PerformRestoration
 - Ipopt::MinC_1NrmRestorationPhase, 257
 - Ipopt::RestorationPhase, 339
 - Ipopt::RestoRestorationPhase, 340
- PerturbForSingularity
 - Ipopt::CGPerturbationHandler, 55
 - Ipopt::PDPerturbationHandler, 300
- PerturbForWrongInertia
 - Ipopt::CGPerturbationHandler, 55
 - Ipopt::PDPerturbationHandler, 300
- PrepareRestoPhaseStart
 - Ipopt::BacktrackingLSAceptor, 41
 - Ipopt::CGPenaltyLSAceptor, 52

- [Ipopt::FilterLSAcceptor](#), 121
 - [Ipopt::InexactLSAcceptor](#), 148
 - [Ipopt::PenaltyLSAcceptor](#), 308
- [Print](#)
 - [Ipopt::Matrix](#), 250
- [PrintCopyrightMessage](#)
 - [Ipopt::IpoptApplication](#), 168
- [PrintImpl](#)
 - [Ipopt::CompoundMatrix](#), 60
 - [Ipopt::CompoundSymMatrix](#), 65
 - [Ipopt::DenseGenMatrix](#), 82
 - [Ipopt::DenseSymMatrix](#), 87
 - [Ipopt::DiagMatrix](#), 100
 - [Ipopt::ExpandedMultiVectorMatrix](#), 108
 - [Ipopt::ExpansionMatrix](#), 112
 - [Ipopt::GenTMatrix](#), 129
 - [Ipopt::IdentityMatrix](#), 136
 - [Ipopt::LowRankUpdateSymMatrix](#), 225
 - [Ipopt::Matrix](#), 252
 - [Ipopt::MultiVectorMatrix](#), 262
 - [Ipopt::ScaledMatrix](#), 343
 - [Ipopt::SumMatrix](#), 373
 - [Ipopt::SumSymMatrix](#), 376
 - [Ipopt::SymScaledMatrix](#), 386
 - [Ipopt::SymTMatrix](#), 390
 - [Ipopt::TransposeMatrix](#), 414
 - [Ipopt::ZeroMatrix](#), 439
 - [Ipopt::ZeroSymMatrix](#), 442
- [PrintStringOverLines](#)
 - [Ipopt::Journalist](#), 210
- [PrintUserOptions](#)
 - [Ipopt::OptionsList](#), 288
- [ProduceOutput](#)
 - [Ipopt::Journalist](#), 211
- [ProvidesDegeneracyDetection](#)
 - [Ipopt::Ma77SolverInterface](#), 238
 - [Ipopt::Ma86SolverInterface](#), 242
 - [Ipopt::Ma97SolverInterface](#), 247
 - [Ipopt::MumpsSolverInterface](#), 266
 - [Ipopt::SparseSymLinearSolverInterface](#), 358
 - [Ipopt::WsmpSolverInterface](#), 437
- [ProvidesInertia](#)
 - [Ipopt::AugRestoSystemSolver](#), 33
 - [Ipopt::AugSystemSolver](#), 36
 - [Ipopt::GenAugSystemSolver](#), 123
 - [Ipopt::GenKKTSolverInterface](#), 126
 - [Ipopt::IterativePardisoSolverInterface](#), 201
 - [Ipopt::IterativeWsmpSolverInterface](#), 206
 - [Ipopt::LowRankAugSystemSolver](#), 219
 - [Ipopt::LowRankSSAugSystemSolver](#), 221
 - [Ipopt::Ma27TSolverInterface](#), 229
 - [Ipopt::Ma57TSolverInterface](#), 234
 - [Ipopt::Ma77SolverInterface](#), 238
 - [Ipopt::Ma86SolverInterface](#), 242
 - [Ipopt::Ma97SolverInterface](#), 247
 - [Ipopt::MumpsSolverInterface](#), 266
 - [Ipopt::PardisoSolverInterface](#), 295
 - [Ipopt::SparseSymLinearSolverInterface](#), 358
 - [Ipopt::StdAugSystemSolver](#), 363
 - [Ipopt::SymLinearSolver](#), 380
 - [Ipopt::TSymLinearSolver](#), 423
 - [Ipopt::WsmpSolverInterface](#), 437
- [push_variables](#)
 - [Ipopt::DefaultIterateInitializer](#), 77
- [ReOptimizeNLP](#)
 - [Ipopt::IpoptApplication](#), 168
- [ReOptimizeTNLP](#)
 - [Ipopt::IpoptApplication](#), 168
- [ReadFromStream](#)
 - [Ipopt::OptionsList](#), 288
- [RecieveNotification](#)
 - [Ipopt::DependentResult](#), 97
- [ReducedDiag](#)
 - [Ipopt::LowRankUpdateSymMatrix](#), 224
- [ReducedInitialize](#)
 - [Ipopt::AlgorithmStrategyObject](#), 23
- [RegisterAllIpoptOptions](#)
 - [Ipopt::IpoptApplication](#), 169
- [RegisterOptions](#)
 - [Ipopt::AlgorithmBuilder](#), 21
 - [Ipopt::EquilibrationScaling](#), 104
 - [Ipopt::GradientScaling](#), 132
 - [Ipopt::InexactAlgorithmBuilder](#), 139
 - [Ipopt::IpoptCalculatedQuantities](#), 176
 - [Ipopt::RestoIpoptNLP](#), 331
- [RegisteredOptions](#)
 - [Ipopt::RegisteredOptions](#), 323
- [RequestAttach](#)
 - [Ipopt::Observer](#), 283
- [RequestDetach](#)
 - [Ipopt::Observer](#), 283
- [Reset](#)
 - [Ipopt::BacktrackingLineSearch](#), 38
 - [Ipopt::BacktrackingLSAcceptor](#), 41
 - [Ipopt::CGPenaltyLSAcceptor](#), 51
 - [Ipopt::FilterLSAcceptor](#), 120
 - [Ipopt::InexactLSAcceptor](#), 148
 - [Ipopt::LineSearch](#), 216
 - [Ipopt::PenaltyLSAcceptor](#), 308
 - [Ipopt::TimedTask](#), 397
- [reset_last](#)
 - [Ipopt::PDPerturbationHandler](#), 302
- [ResetTimes](#)
 - [Ipopt::TimingStatistics](#), 399
- [RestoIterateInitializer](#)
 - [Ipopt::RestoIterateInitializer](#), 333
- [RestoIterationOutput](#)

- [Ipopt::RestoIterationOutput](#), 335
- [RestoRestorationPhase](#)
 - [Ipopt::RestoRestorationPhase](#), 340
- [RestoredIterate](#)
 - [Ipopt::BacktrackingLSAcceptor](#), 42
 - [Ipopt::CGPenaltyLSAcceptor](#), 53
- [RethrowNonIpoptException](#)
 - [Ipopt::IpoptApplication](#), 168
- [s_NonConst](#)
 - [Ipopt::IteratesVector](#), 192
- [ScaleColumns](#)
 - [Ipopt::DenseGenMatrix](#), 80
 - [Ipopt::MultiVectorMatrix](#), 261
- [ScaleRows](#)
 - [Ipopt::MultiVectorMatrix](#), 261
- [Set](#)
 - [Ipopt::Vector](#), 431
- [set_active_objective](#)
 - [Ipopt::AmplTNLP](#), 31
- [Set_bound_mult](#)
 - [Ipopt::IteratesVector](#), 195
- [Set_c_Avc_norm_cauchy](#)
 - [Ipopt::InexactNormalTerminationTester](#), 154
- [set_delta](#)
 - [Ipopt::IpoptData](#), 180
- [set_delta_cgpen](#)
 - [Ipopt::CGPenaltyData](#), 49
- [Set_eq_mult](#)
 - [Ipopt::IteratesVector](#), 195
- [Set_info_skip_output](#)
 - [Ipopt::IpoptData](#), 182
- [Set_primal](#)
 - [Ipopt::IteratesVector](#), 195
- [Set_s](#)
 - [Ipopt::IteratesVector](#), 192
- [Set_s_NonConst](#)
 - [Ipopt::IteratesVector](#), 192
- [Set_tol](#)
 - [Ipopt::IpoptData](#), 181
- [set_trial](#)
 - [Ipopt::IpoptData](#), 180
- [Set_v_L](#)
 - [Ipopt::IteratesVector](#), 194
- [Set_v_L_NonConst](#)
 - [Ipopt::IteratesVector](#), 194
- [Set_v_U](#)
 - [Ipopt::IteratesVector](#), 195
- [Set_v_U_NonConst](#)
 - [Ipopt::IteratesVector](#), 195
- [Set_x](#)
 - [Ipopt::IteratesVector](#), 192
- [Set_x_NonConst](#)
 - [Ipopt::IteratesVector](#), 192
- [Set_y_c](#)
 - [Ipopt::IteratesVector](#), 192
- [Set_y_c_NonConst](#)
 - [Ipopt::IteratesVector](#), 193
- [Set_y_d](#)
 - [Ipopt::IteratesVector](#), 193
- [Set_y_d_NonConst](#)
 - [Ipopt::IteratesVector](#), 193
- [Set_z_L](#)
 - [Ipopt::IteratesVector](#), 193
- [Set_z_L_NonConst](#)
 - [Ipopt::IteratesVector](#), 194
- [Set_z_U](#)
 - [Ipopt::IteratesVector](#), 194
- [Set_z_U_NonConst](#)
 - [Ipopt::IteratesVector](#), 194
- [SetAddCq](#)
 - [Ipopt::IpoptCalculatedQuantities](#), 174
- [SetAllPrintLevels](#)
 - [Ipopt::Journal](#), 208
- [SetBlockCols](#)
 - [Ipopt::CompoundMatrixSpace](#), 62
- [SetBlockRows](#)
 - [Ipopt::CompoundMatrixSpace](#), 62
- [SetComp](#)
 - [Ipopt::CompoundMatrix](#), 59
 - [Ipopt::CompoundSymMatrix](#), 64
- [SetCompSpace](#)
 - [Ipopt::CompoundMatrixSpace](#), 62
 - [Ipopt::CompoundSymMatrixSpace](#), 67
 - [Ipopt::CompoundVectorSpace](#), 73
- [SetDiag](#)
 - [Ipopt::DiagMatrix](#), 99
 - [Ipopt::LowRankUpdateSymMatrix](#), 224
- [SetFactor](#)
 - [Ipopt::IdentityMatrix](#), 135
- [SetHaveAffineDeltas](#)
 - [Ipopt::IpoptData](#), 181
- [SetHaveDeltas](#)
 - [Ipopt::IpoptData](#), 181
- [SetImpl](#)
 - [Ipopt::CompoundVector](#), 71
 - [Ipopt::DenseVector](#), 92
 - [Ipopt::Vector](#), 431
- [SetInitialIterates](#)
 - [Ipopt::DefaultIterateInitializer](#), 77
 - [Ipopt::IterateInitializer](#), 187
 - [Ipopt::RestoIterateInitializer](#), 333
 - [Ipopt::WarmStartIterateInitializer](#), 435
- [SetOrigLSAcceptor](#)
 - [Ipopt::RestoFilterConvergenceCheck](#), 327
 - [Ipopt::RestoPenaltyConvergenceCheck](#), 337
- [SetPrintLevel](#)
 - [Ipopt::Journal](#), 208

- SetRegisteringCategory
 - Ipopt::RegisteredOptions, 323
- SetRigorousLineSearch
 - Ipopt::BacktrackingLineSearch, 38
 - Ipopt::LineSearch, 216
- SetTerm
 - Ipopt::SumMatrix, 372
 - Ipopt::SumSymMatrix, 376
- SetTermSpace
 - Ipopt::SumMatrixSpace, 374
 - Ipopt::SumSymMatrixSpace, 378
- SetU
 - Ipopt::LowRankUpdateSymMatrix, 224
- SetV
 - Ipopt::LowRankUpdateSymMatrix, 224
- SetValues
 - Ipopt::DenseVector, 91
 - Ipopt::GenTMatrix, 128
 - Ipopt::SymTMatrix, 389
- SetVector
 - Ipopt::ExpandedMultiVectorMatrix, 107
 - Ipopt::MultiVectorMatrix, 261
- SinvBlrmZMTdBr
 - Ipopt::Matrix, 250
- SinvBlrmZMTdBrImpl
 - Ipopt::CompoundMatrix, 60
 - Ipopt::ExpansionMatrix, 112
 - Ipopt::Matrix, 251
 - Ipopt::ScaledMatrix, 343
- Solve
 - Ipopt::AugSystemSolver, 35
 - Ipopt::PDSysolver, 306
 - Ipopt::SymLinearSolver, 380
- SolveStatistics
 - Ipopt::SolveStatistics, 353
- SpecialAddForLMSR1
 - Ipopt::DenseSymMatrix, 86
- Start
 - Ipopt::TimedTask, 397
- StartWatchDog
 - Ipopt::BacktrackingLSAcceptor, 42
 - Ipopt::CGPenaltyLSAcceptor, 53
 - Ipopt::FilterLSAcceptor, 121
 - Ipopt::InexactLSAcceptor, 149
 - Ipopt::PenaltyLSAcceptor, 309
- Statistics
 - Ipopt::IpoptApplication, 168
- StdInterfaceTNLP
 - Ipopt::StdInterfaceTNLP, 365
- StopWatchDog
 - Ipopt::BacktrackingLSAcceptor, 42
 - Ipopt::CGPenaltyLSAcceptor, 53
 - Ipopt::FilterLSAcceptor, 122
 - Ipopt::InexactLSAcceptor, 149
 - Ipopt::PenaltyLSAcceptor, 309
- StreamJournal
 - Ipopt::StreamJournal, 368
- SumSymMatrixSpace
 - Ipopt::SumSymMatrixSpace, 378
- SymTMatrixSpace
 - Ipopt::SymTMatrixSpace, 392
- TEST_1_SATISFIED
 - Ipopt::IterativeSolverTerminationTester, 203
- TEST_2_SATISFIED
 - Ipopt::IterativeSolverTerminationTester, 203
- TEST_3_SATISFIED
 - Ipopt::IterativeSolverTerminationTester, 203
- TNLPReducer
 - Ipopt::TNLPReducer, 410
- TSymLinearSolver
 - Ipopt::TSymLinearSolver, 422
- TaggedObject
 - Ipopt::TaggedObject, 394
- TestTermination
 - Ipopt::InexactNormalTerminationTester, 154
 - Ipopt::InexactPDTerminationTester, 157
 - Ipopt::IterativeSolverTerminationTester, 204
- TimedTask
 - Ipopt::TimedTask, 397
- TimingStatistics
 - Ipopt::TimingStatistics, 399
- tnlp
 - Ipopt::TNLPAdapter, 408
- tol
 - Ipopt::IpoptData, 181
- TotalCPUTime
 - Ipopt::SolveStatistics, 353
- TotalCpuTime
 - Ipopt::SolveStatistics, 353
 - Ipopt::TimedTask, 397
- TotalSysTime
 - Ipopt::SolveStatistics, 353
 - Ipopt::TimedTask, 397
- TotalWallclockTime
 - Ipopt::SolveStatistics, 353
 - Ipopt::TimedTask, 397
- TransMultVector
 - Ipopt::Matrix, 250
- TransMultVectorImpl
 - Ipopt::CompoundMatrix, 60
 - Ipopt::DenseGenMatrix, 81
 - Ipopt::ExpandedMultiVectorMatrix, 108
 - Ipopt::ExpansionMatrix, 112
 - Ipopt::GenTMatrix, 129
 - Ipopt::Matrix, 251
 - Ipopt::MultiVectorMatrix, 261
 - Ipopt::ScaledMatrix, 342

- Ipopt::SumMatrix, [372](#)
 - Ipopt::SymMatrix, [382](#)
 - Ipopt::TransposeMatrix, [414](#)
 - Ipopt::ZeroMatrix, [439](#)
 - Ipopt::ZeroSymMatrix, [442](#)
- TransposeMatrixSpace
 - Ipopt::TransposeMatrixSpace, [416](#)
- trial
 - Ipopt::IpoptData, [180](#)
- trial_constraint_violation
 - Ipopt::IpoptCalculatedQuantities, [174](#)
- trial_primal_dual_system_error
 - Ipopt::IpoptCalculatedQuantities, [176](#)
- Triangular_Format
 - Ipopt::TripletToCSRConverter, [418](#)
- Triplet_Format
 - Ipopt::SparseSymLinearSolverInterface, [356](#)
- TryCorrector
 - Ipopt::BacktrackingLSAceptor, [42](#)
 - Ipopt::CGPenaltyLSAceptor, [52](#)
 - Ipopt::FilterLSAceptor, [121](#)
 - Ipopt::InexactLSAceptor, [148](#)
 - Ipopt::PenaltyLSAceptor, [309](#)
- TrySecondOrderCorrection
 - Ipopt::BacktrackingLSAceptor, [41](#)
 - Ipopt::CGPenaltyLSAceptor, [52](#)
 - Ipopt::FilterLSAceptor, [121](#)
 - Ipopt::InexactLSAceptor, [148](#)
 - Ipopt::PenaltyLSAceptor, [308](#)
- uncached_slack_frac_to_the_bound
 - Ipopt::IpoptCalculatedQuantities, [176](#)
- uninitialized_h
 - Ipopt::IpoptNLP, [186](#)
 - Ipopt::OrigIpoptNLP, [291](#)
 - Ipopt::RestIpoptNLP, [330](#)
- unscaled_curr_complementarity
 - Ipopt::IpoptCalculatedQuantities, [175](#)
- unscaled_curr_nlp_constraint_violation
 - Ipopt::IpoptCalculatedQuantities, [175](#)
- unscaled_curr_nlp_error
 - Ipopt::IpoptCalculatedQuantities, [175](#)
- unscaled_trial_nlp_constraint_violation
 - Ipopt::IpoptCalculatedQuantities, [175](#)
- UpdateBarrierParameter
 - Ipopt::AdaptiveMuUpdate, [20](#)
 - Ipopt::MonotoneMuUpdate, [259](#)
 - Ipopt::MuUpdate, [269](#)
- UpdateForNextIteration
 - Ipopt::BacktrackingLSAceptor, [42](#)
 - Ipopt::CGPenaltyLSAceptor, [52](#)
 - Ipopt::FilterLSAceptor, [121](#)
 - Ipopt::InexactLSAceptor, [148](#)
 - Ipopt::PenaltyLSAceptor, [309](#)
- v_L_NonConst
 - Ipopt::IteratesVector, [194](#)
- v_U_NonConst
 - Ipopt::IteratesVector, [195](#)
- VPrintf
 - Ipopt::Journalist, [211](#)
- VPrintfIndented
 - Ipopt::Journalist, [211](#)
- Values
 - Ipopt::DenseGenMatrix, [80](#)
 - Ipopt::DenseSymMatrix, [86](#)
 - Ipopt::DenseVector, [91](#)
 - Ipopt::GenTMatrix, [128](#)
 - Ipopt::SymTMatrix, [390](#)
- Vector
 - Ipopt::Vector, [430](#)
- WarmStartIterateInitializer
 - Ipopt::WarmStartIterateInitializer, [435](#)
- write_solution_file
 - Ipopt::AmplTNLP, [31](#)
- WriteOutput
 - Ipopt::IterationOutput, [199](#)
 - Ipopt::OrigIterationOutput, [293](#)
 - Ipopt::RestIterationOutput, [335](#)
- x
 - Ipopt::IteratesVector, [191](#)
- x_NonConst
 - Ipopt::IteratesVector, [191](#)
- y_c_NonConst
 - Ipopt::IteratesVector, [192](#)
- y_d_NonConst
 - Ipopt::IteratesVector, [193](#)
- z_L_NonConst
 - Ipopt::IteratesVector, [193](#)
- z_U_NonConst
 - Ipopt::IteratesVector, [194](#)